



2021.1

Administrator Guide

Contents


Administrator Guide for WorkZone Process 2021.1	5
What's new	6
Configuring processes	24
Configure extended submission	24
Configure a ministerial process	25
Service workflows	28
F2 integration	28
F2 integration	34
Install and configure F2 integration	40
Provide access to monitor an F2 mail account	46
Mailbox monitor	48
Configure a Mailbox Monitor service workflow	49
Optional configurations in WorkZone Client	56
Process Monitor	61
Configure a Mailbox Monitor service workflow	63
Case monitor	70
Creating rule sets	71
Configure a case monitoring service workflow	73
Interact connector	74
Acquire and install the Interact certificate	74
Create and configure an Interact connector service workflow	78
WorkZone actions	82
Mapping fields in Interact forms to data	84
Mandatory fields and dependencies	87
View Interact connector errors	92
Troubleshooting Interact connector	93
Configuring SmartPost	94

SmartPost prerequisites	94
Configure digital mail	102
Configure remote print	104
Acquire and install the e-Boks Certificate	106
Apply certificates to SmartPost	112
Configure SmartPost	116
Configure CPR and CVR	123
Configure SmartPost for sending messages	127
Configure dispatchers	127
Configure dispatch sequences	134
Configure e-Boks materials	139
Configure print types	142
Configure templates	145
Configure standard letters	153
Configure SmartPost and GDPR classification	154
Configure allowed documents	158
Send messages status	160
Dispatch information	161
Add the TLS 1.2 key to Registry (Windows Server 2008 R2)	164
Configure SmartPost for receiving messages	173
Configure SmartPost for receiving messages	173
Handle e-Boks messages sent to subunits	177
Configure validation of a contact hierarchy	179
Handling receipt of messages on closed cases	179
Dispatcher error handling	181
e-Boks errors	181
Strålfors errors	196
OneTooX errors	205

Other configurations	208
Create and share lists	209
Configure workflow failover	211
Configure default access to processes	212
Configure notifications	212
Configure push notification certificates for WorkZone Mobile	213
Configure availability of processes	214
Configure the process history document	214
Configure a process title	218
Configure the retry period for history document creation	219
Configure the use of new name instances	219
Copy and rename a process	220
About case activities	222
About case activities	224
Getting started with case activity graphs	228
Create a graph using the WorkZone template	229
Activity types	231
Execute activities automatically	251
Enable quick execution of activities	252
Apply deadlines and delays to activities	254
Export and deploy case activity graphs	256
FAQs about case activities	257
Troubleshooting case activities	260
Troubleshooting	262
Terms and conditions	267

Administrator Guide for WorkZone Process 2021.1

This guide describes how to configure WorkZone Process.

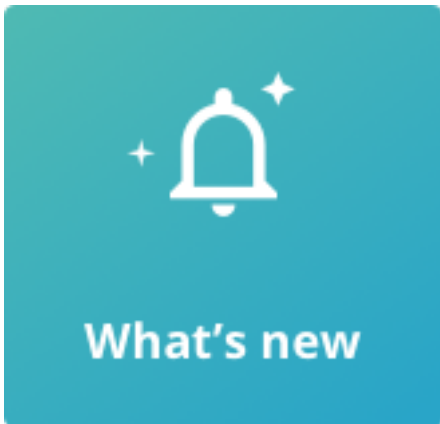

Related product documentation

- [WorkZone Process User Guide](#)
- [WorkZone Process Developer Guide](#)
- [Release notes](#)

What's new

New features and functionality in WorkZone Process 2021.1

No new features in this release.

[WorkZone Process 2020.0](#)

No new features in this release.

[WorkZone Process 2020.3](#)

No new features in this release.

[WorkZone Process 2020.2](#)

SmartPost

- New parameter **PdfFailIfOutOfBounds**.
- Configuration of e-Boks mailbox mappings to specific units and cases has been moved from WorkZone Configuration Management to WorkZone Configurator. See Map e-Boks mailboxes to cases.

Case monitor service workflow

New prerequisite to install WorkZone PDF Engine on the agent server where the case monitor service workflow runs if the service workflow starts a case activity list that contains SendSmartPost activities.

See Case monitor.

Case activities

Use of . dot notation in Property parameters

You can now also use the dot notation `{Case.<Property>}` introduced in the 2020.1 release in the **Property** parameter of activities. For example, `{Case.Title}` to retrieve the title of the current case.

See the **UpdateEntities** and **ValidateEntities** activity types.

Interact connector

The **CorporateAccessUser** parameter in the Interact connector service workflow has been renamed to **ExecutingUser**. It applies to WorkZone environments with and without corporate access. See [ExecutingUser](#).

[WorkZone Process 2020.1](#)

SmartPost

Support for Digital Post2

The SmartPost-eBoks dispatcher now supports Digital Post 2. To use SmartPost with eBoks using Digital Post 2, you need to install WorkZone Prozesse-Boks Push Service. Two new parameters have been added to the eBoks dispatcher.

See Edit dispatcher parameters and [Install the e-Boks push service](#) in the WorkZone Installation Guide.

e-Boks error code 1000—changed SmartPost action

The SmartPost action to the e-Boks error 1000 has changed from **Retry** to **Notify**.

In case of operational issues at e-Boks, e-Boks returns an error code 1000 (internal server error) to WorkZone. The SmartPost process fails, but in previous releases the error was not reported because the SmartPost action was set to **Retry** by default. With the action set to **Notify** by default:

- The process owner will be notified about the failed dispatch.
- The process will be completed, and the history document will be generated so that you can see the status of each dispatch.

See error 1000.

Mailbox monitor

The sender, recipients, and CC recipients will be added as case parties when new cases are created.

See Mailbox monitor.

Case activities

GetValue activity type

Using the new **GetValue** activity type you can retrieve a value on, for example a case, and use it in guards to make conditions based on WorkZone data.

See GetValue.

SetValue activity type

A new **SetValue** allows you to set a value in a WorkZone property based on a query.

See SetValue.

StartProcess activity type

It is now possible to start processes without parameters automatically using the AUTO or L-AUTO roles.

See StartProcess.

L-AUTO role

A new **L-AUTO** role execute activities as soon as they are included and pending. You can also use the **L-AUTO** role to align the behavior of your WorkZone case activities with the simulation in DCR Graphs using the lazy user role.

See Execute activities automatically.

Quick execution of activities

Activities can now be executed without opening dialog boxes. On all activity types, you can select an **EnableQuickExecution** option, which will display a check box next to the activity in WorkZone Client. When a user selects the check box, the activity is executed immediately without opening a dialog box.

See Enable quick execution of activities.

Changed notations

The notation for current case that you can use in queries has changed from `{CurrentFileKey}` to `{Case.ID}`. You can still use the `{CurrentFileKey}` notation.

Similarly, you can now use the notation `{Case.<Property>}` to retrieve values of specific properties on the current case in queries. For example, `{Case.Officer_Value}` to retrieve the case handler or `{Case.State_Value}` to retrieve the state of the current case.

The examples in this guide have been revised to use the new notation. See Activity types.

Interact

Document mappings are applied to system generated documents

If you have mapped meta data on documents, this mapping will also apply to the system generated PDF and XML documents. If you have not mapped any meta data to documents, the default values will be used.

See WorkZone actions.

[WorkZone Process 2020.0](#)

Interact connector

Improved error handling

If retrieval of data from an Interact form fails, a case that contains the error message and information about the form is created automatically. To get an overview of errors, you can create a search that extracts the error cases, save the search, and show search results in a list in the navigation pane in WorkZone Client.

See View Interact connector errors.

Case activities

Deadlines and delays

WorkZone now supports setting deadlines and delays on activities in a DCR graph, which means that you can create graphs that can execute activities automatically after a specific amount of time has passed or a deadline is reached.

See Apply deadlines and delays to activities.

Validation interval

You can configure the **ValidateEntities** activity type to be executed automatically at a specific interval using a new **ValidationInterval** parameter. Use this parameter if you await specific information to be available on a case before the next activity can be executed. For example, a receipt for payment must be saved on the case before the case handling can continue.

See ValidateEntities.

Send SmartPost activity type - new parameter

A new **ProcessOwner** parameter has been added. It specifies the process owner of the SmartPost process.

See SendSmartPost.

AUTO role

Activities with the **AUTO** role assigned are now executed by a system user.

See Execute activities automatically.

Mailbox Monitor service workflow

The Mailbox Monitor service workflow has been optimized to monitor multiple mailboxes in a service workflow.

See Mailbox monitor.

Miscellaneous enhancements

Extended submission—new **NotificationsDefaultActions** parameter

New **NotificationsDefaultActions** parameter for configuring default actions that will be selected on the **Notifications** tab in the **Start Submission (Extended)** dialog box.

See Configure extended submission.

Processes Overview settings have been removed

The **Processes overview** parameters under **Process settings** in WorkZone Configurator have been removed. The new **Processes Overview** introduced with this release does not require these parameters.

See [What's new](#) in the WorkZone Process User Guide.

New SmartPost parameter

A new **AllowOfficeReremerge** parameter has been added. If content controls have already been merged in Word, the content controls will be merged again when sending the message through SmartPost.

See Configure SmartPost.

[WorkZone Process 2019.3](#)

Notifications

You can now configure which notifications users should receive by specifying settings in WorkZone Configurator. In previous releases, you had to configure the notification settings in the database. This is no longer needed.

Users can also turn notifications on/off in WorkZone Client. In this case, the settings in WorkZone Configurator are overridden.

See Configure notifications.

SmartPost

Suggested process title

A new **SuggestedTitle** parameter allows you to specify a process title that will be prefilled in the **Start process** dialog box when users start standard processes. You can apply suggested titles to the Hearing (Basis), Submission (Basis), Submission (Extended), and Distribution (Extended) processes.

See Configure a process title.

Doc2Mail is renamed to OneTooX

The name change is implemented in both the user interface and the documentation.

Case activities

Extended SendSmartPost activity type

New parameters have been added to **SendSmartPost** activity type. You can now specify copy recipients and attachments to the SmartPost process using the new **CopyRecipients** and **Attachments** parameters.

A new **ProcessGuid** allows you to specify which SmartPost to start if your company uses several SmartPost processes.

See the Send SmartPost activity type parameters in the Activity types topic.

New CompleteGraph activity type

Using the new **CompleteGraph** activity type you can design when to allow users to complete an activity list even if some activities have not been executed.

See CompleteGraph.

Interact connector

- In the Interact connector service workflow, the **FormIds** parameter has been extended so that you can specify multiple form IDs. If no form ID is specified, data from all forms will be fetched.

See [Create and configure an Interact connector service workflow](#).

- The XML document which contains content and additional meta data about submitted data from Interact is now added as a supplementary document to the PDF document. Previously, it was added as a document on the case.

See [WorkZone actions](#).

[WorkZone Process 2019.2](#)

Installation

You can now find information about installing WorkZone Process in a common WorkZone Installation Guide that covers installation of all WorkZone products.

See [WorkZone Installation Guide](#).

SmartPost

Send attachments as separate documents

Users can now send attachments as separate PDF documents in messages sent to e-Boks. For this purpose, three new parameters have been added to the SmartPost process parameters:

- **AllowSendingSeparateDocuments** allows users to send attachments as separate PDF documents in messages to e-Boks.
- **DefaultSendSeparateDocuments** turns on **AllowSendingSeparateDocuments** by default.
- **MergeAllDocument** allows you to configure if you want to merge the letter and its attachments into one PDF document or if you only want the PDF document to contain the letter. Attachments will still be sent as separate PDF documents.

See the **AllowSendingSeparateDocuments**, **DefaultSendSeparateDocuments** and the **MergeAllDocuments** parameters.

Save received messages sent to subunits on specific cases

It is now possible to receive unsolicited messages from e-Boks that are sent to subunits of an organization. The received messages are then automatically saved on the specific cases that are mapped to the subunits.

See [Handle e-Boks messages sent to subunits](#).

Validation of the contact hierarchy

Two new parameters `ValidationHour` and `ValidateAtStartup` have been added. They allow you to schedule when to validate if the contact hierarchy e-Boks Administrationsportal matches the mapping of e-Boks mailboxes and cases in WorkZone.

See [Configure validation of a contact hierarchy](#).

Case activities

New `SendSmartPost` activity type

The **`SendSmartPost`** activity type starts a `SmartPost` process automatically. Currently, the **`SendSmartPost`** activity type only includes basic functionality such as sending a letter to recipients.

See [Activity types](#).

[WorkZone Process 2019.1](#)

SmartPost

SecurityProtocol parameter

The `SmartPost` process now complies with Microsoft best practice for security protocols. This means that you no longer need to configure a security protocol for e-Boks and Strålfors dispatchers. As a result, the **`SecurityProtocol`** parameter has been removed from the e-Boks and Strålfors dispatcher configuration in WorkZone Configurator. See [Configure digital mail](#), [Configure remote print](#), and [Configure dispatchers](#).

If you upgrade from a previous release, the new version of the e-Boks and Strålfors dispatchers will not contain the **`SecurityProtocol`** parameter.

For more information about Microsoft best practices, see the article [Transport Layer Security \(TLS\) best practices with the .NET Framework](#).

Support for GDPR

It is now possible to define allowed classification levels of documents that `SmartPost` can send. You can define a maximum document classification rank that the `SmartPost` process

will allow. It means that users will only be able to select documents with document classification ranks lower or equal to the configured threshold.

See Configure SmartPost and GDPR classification.

HistoryDocRetryPeriod parameter

A new parameter named **HistoryDocRetryPeriod** has been added. It allows you to configure the period of time that WorkZone will retry to generate a history document in case of failure. You can configure this parameter for all processes that generates history documents, such as the Submission (basis), Submission (Extended), Hearing (Basis), and Distribution (Extended) processes.

See Configure the retry period for history document creation.

Push notification certificate for WorkZone Mobile for Intune

A new certificate, **Apple Push Services: dk.kmd.workzone.intune**, used for sending push notifications from WorkZone Process to WorkZone Mobile for Intune is now installed to the certificate store. To use this certificate, you need to change the Scanjour.Process.Notification.AgentHost.exe.config file. See Configure push notification certificates for WorkZone Mobile.

Interact integration

The actions that WorkZone can perform based on data retrieved from Interact forms have been extended. The Interact connector service workflow can now:

- Add data from custom fields to a case.
- Add existing contacts as parties on a case.
- Update existing cases.

See WorkZone actions.

Case activities

A new version of the WorkZone Case Activity Template is available in DCR Graphs. The template has been extended with an **AUTO** role and a new **UpdateEntities** and **ValidateEntities** activity types.

AUTO role

To reduce the number of activities that a user needs to perform in a case activity list, you can configure activities to be executed automatically. In previous releases, only the **CopyDocument** activity type could be executed automatically. Now, you can apply a new role named **Auto** to all activity types, which will execute the activity automatically. See [Execute activities automatically](#).

UpdateEntities activity type

A new activity type named **UpdateEntities** will update text fields on a case when an activity is executed. See [Activity types](#).

ValidateEntities activity type

A new activity type named **ValidateEntities** allows you to validate WorkZone data and if the validation is successful, execute subsequent activities. **ValidateEntities** works in connection with guards.

See [Activity types](#).

[WorkZone Process 2019.0](#)

Case monitoring service workflow

In this release, you can create and configure case monitoring service workflows using WorkZone Configurator. For more information, see [Configure a case monitoring service workflow](#).

SmartPost


SecurityProtocol parameter

The **SecurityProtocol** parameter that is used when configuring Strålfors and e-Boks dispatchers is now set to **SystemDefault** by default. You no longer need to enter a specific protocol. The value of the **SystemDefault** parameter means that the operating system will negotiate the applied security protocol with the Strålfors and the e-Boks services. See the **SecurityProtocol** parameter description for Strålfors and e-Boks in [Configure dispatchers](#).

If you run Windows Server 2008 R2, you need to follow a special configuration procedure. For more information, see [Add the TLS 1.2 key to Registry \(Windows Server 2008 R2\)](#).

Changing the watermark on copies

It is now possible to change the default watermark text KOPI, which is inserted on the document copies that are sent to copy recipients. In the new **CopyWatermark** parameter, you can enter the watermark text.

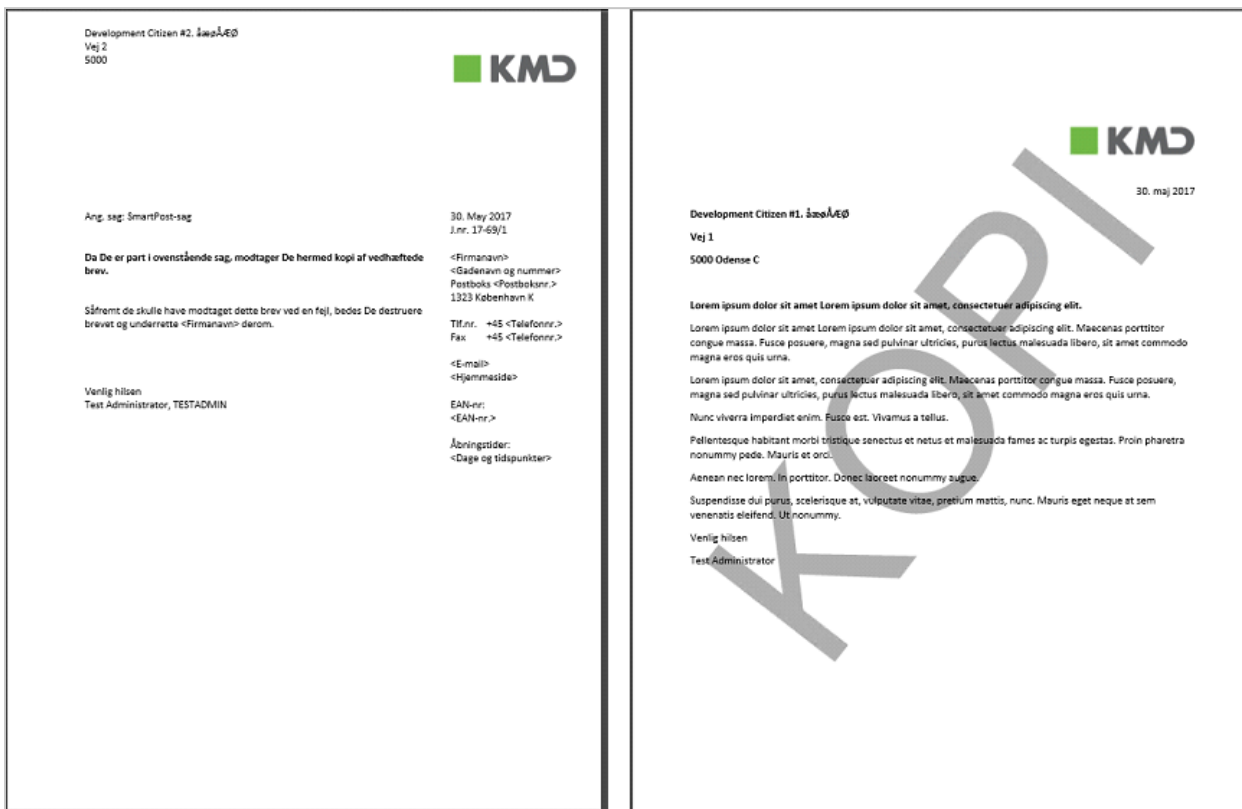

For more information, see the description of the **CopyWatermark** parameter in **Configure SmartPost**.

Allowed documents

You can now configure which documents that users are allowed to select as the letter document and attachments in the **Send SmartPost** dialog box. The list of documents shown in the **Letter** and **Attachments** fields is based on configured values from a droplist in a custom field. You configure allowed documents in **WorkZone Configurator** using two new parameters, **ValidationProperty** and **ValidationValues** in the **SmartPost** process.

For more information, see **Configure allowed documents** and **Configure SmartPost**.

[WorkZone Process 2018.2 SP1](#)

SmartPost

A new **RemergePdfEnabled** parameter allows updating the letter date of the PDF document at preview and approval of the SmartPost message before sending the message. See [RemergePDFEnabled](#).

Interact connector service workflow

A new service workflow named **Interact connector** connects to KMD WorkZone Interact, retrieves data from Interact forms, and then creates cases and adds documents in WorkZone based on the data that users have entered in a form. See [Interact connector](#).

Case monitoring service workflow

A new service workflow that monitors newly created cases and then automatically starts a case activity or a customized workflow without mandatory arguments. See [Case monitor](#).

In this release, you can create and configure case monitoring service workflows using WorkZone Configuration Management. As of the coming WorkZone 2019 release, you will be able to configure the service workflow using WorkZone Configurator.

Automatic start of a case activity or workflow when a case is created

A case activity or a workflow can now be started automatically when a new case is created. A case monitoring service workflow monitors when new cases are created, and if the new cases fulfill a specific set of rules, it starts a case activity or a workflow automatically.

For more information about setting up a Case monitoring service workflow, see [Case monitor](#).

Updates and cancellations of F2 requisitions


The rules for receiving updates and cancellation of F2 requisitions have changed. See [Updated F2 requisitions](#). Cancelled F2 requisitions are now handled in WorkZone. See [Cancelled F2 requisitions](#).

[WorkZone Process 2018.2](#)

Parameters

You can now define even more WorkZone Process parameters in WorkZone Configurator. With this release, the following configurations have been added to WorkZone Configurator:

- e-Boks materials. See Configure e-Boks materials.
- SmartPost dispatchers. See Configure dispatchers.
- Dispatch sequences. See Configure dispatch sequences.
- Print types (previously named remote print types). See Configure print types.
- General Process settings. See Other configurations.

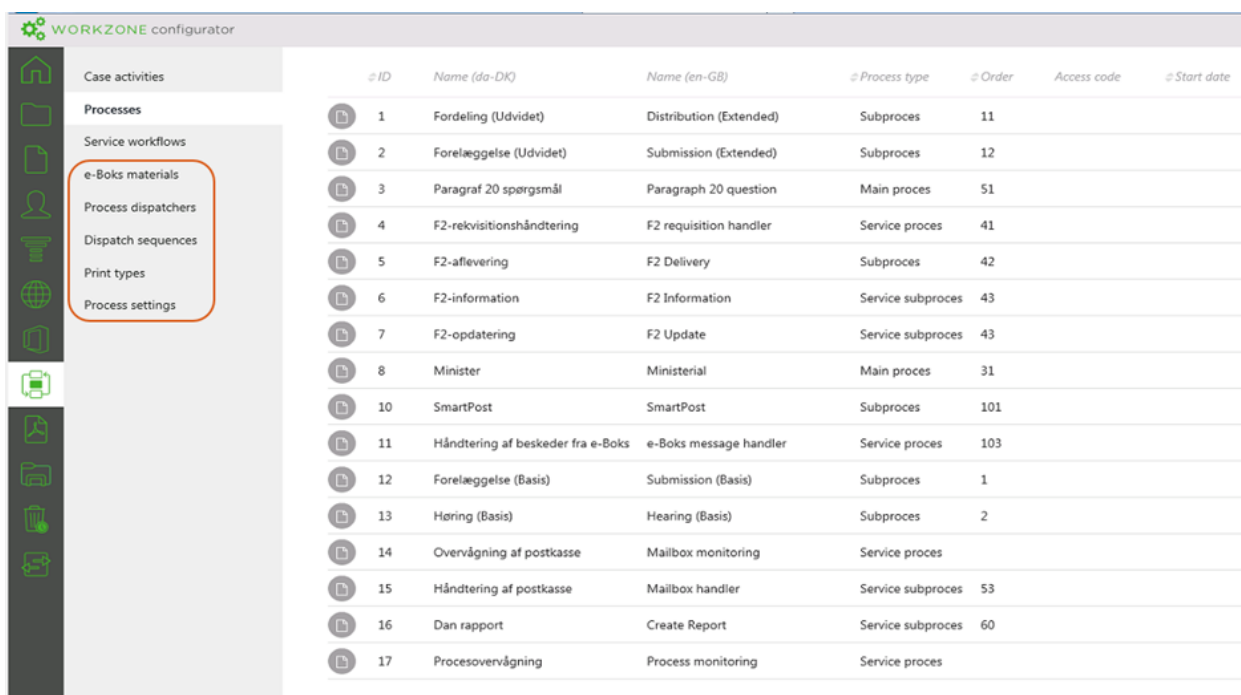

The documentation has been revised to reflect the location of parameters in WorkZone Configurator.

Exchange Online

WorkZone Process now supports configuration of Exchange Online for sending smart-tasks and e-mail notifications. You can also monitor Exchange Online mailboxes using the Mailbox monitoring and F2 requisition handler service workflows.

See [Configure WorkZone Process](#) in the WorkZone Installation Guide.

SmartPost enhancements:

A new OneTooX dispatcher has been added. Using the OneTooX dispatcher, it is possible to send SmartPost messages for remote print at KMD Printcenter. See Configure remote print - OneTooX.

WorkZone Process 2018.1

- You can now configure processes and service workflows in WorkZone Configurator. In WorkZone Configurator, click **Process**, and then select the area of configuration, for example **Processes**, or **Service workflows**. See [Processes](#) and [Service workflows](#) in the WorkZone Configurator Administrator Guide and Configuring processes and Service workflows in this guide.

Note: As in previous releases, you configure general process settings and SmartPost settings in the WorkZone Configuration Management. The documentation has been revised to reflect where you find the relevant parameters.

- You can copy and rename a standard process and its labels if you want to use the process in another context. See [Copy and rename a process](#).
- The F2 requisition handler service workflow now includes a new parameter **IncludeTemplate** and the **F2Template** parameter has been modified. See [Install and configure F2 integration](#).
- Performance improvements have been made in the following areas:
 - User task actions.
 - Opening and loading default values in to the **Send SmartPost** dialog box.
- e-Boks and Strålfors error lists including error codes, descriptions, and SmartPost actions are now part of this guide. See [Dispatcher error handling](#).

WorkZone Process 2018.01

- You can hide the approval check box from the SmartPost dialog box if your organization does not use the approval step in the SmartPost process. You can specify the setting named **ApprovalEnabled** in the SmartPost process settings in WorkZone Configuration Management. See [Configure SmartPost](#).
- You can configure the SmartPost dialog box to include an option for selecting a standard letter provided by your organization. See [Configure standard letters](#).
- You can configure the SmartPost process comply with customized of locations of CVR and CPR numbers in the database and identification of the sender when receiving SmartPost messages has been improved. See [Configure CPR and CVR](#).

WorkZone Process 2018

- The WorkZone Process **Configuration Wizard** has been changed.
 - WorkZone Process now runs under a dedicated WorkZone Process user named SJPROCESSUSER. As in previous releases, you must create a service user in the AD, and enter information about it in the **KMD WorkZone Process Configuration Wizard**. The wizard will then handle the SID association with the SJPROCESSUSER automatically.

Note: You no longer need to associate the SID.

- You can now choose to run the configuration on either a web server role or an agent server role, or both from the **KMD WorkZone Process Configuration Wizard**. In previous releases, this selection was part of the **WorkZone ProcessSetup Wizard**. If you select the **Web** role, process packages and service workflows will be installed in the database, database changes will be downloaded, WorkZone Process will be configured in IIS, and process settings will be available in WorkZone Configuration Management. If you select the **Agent** role, all agents will be installed on the server and process services will be enabled.
- A new **Validate** button allows you to validate that prerequisites are fulfilled and features connected with a specific role are in place before starting the actual configuration. You can also perform the validation using command line configuration by using a new `-val` parameter.
- The WorkZone Process **Configuration Wizard** now automatically adds logon as service to the service user.
- A new workflow log profile, which limits the amount of log information that is written to the **WZP_WORKFLOW_LOG** table, is introduced. You enable the profile for each process type in WorkZone Configuration Management.
- Error handling in the Mailbox Monitor service workflow has been improved. You can now separate faulty emails that have not been saved on cases from the emails in the monitored mailbox for better overview. You can set up the Mailbox

Monitor service workflow to move the faulty emails to a specific Outlook folder and notify a specific user about by email. Two new settings **FaultedFolderName** and **FaultNotificationMailbox** settings are added in WorkZone Configuration Management. See Unsaved emails.

- F2 integration service workflow improvements:
 - The default process owner for F2 service workflows can be an organizational unit with an email.
 - Only one F2 mailbox monitor is allowed in a standard access code setup. One F2 mailbox monitor is allowed per authority in a corporate access code setup.

See [Create and configure an F2 requisition handler service workflow in WorkZone Configurator](#).

- Ministerial process improvements:
 - The Approval phase (Danish: Godkendelse) is now named Submission (Danish: Forelæggelse").
 - The Delivery phase (Danish: Aflevering) is now named Approval (Danish: Godkendelse).
 - When the extended submission process is started, you can set up the Ministerial process to move forward to the Submission phase. The Processing phase will be closed. See [Configure a ministerial process](#).
 - When the extended submission process reaches a contributor, such as a unit or an employee with a specific role, the ministerial process is automatically moved forward to the Approval phase. See [Configure a ministerial process](#).
 - If running with the F2 integration, you will see that information about sender and copy recipients is now merged from F2 to the description in the Ministerial process, so that you can see who sent the requisition and who are copy recipients on the requisition.

- SmartPost improvements:
 - The SmartPost dispatcher settings are now moved from the general **Process Settings** to the SmartPost process under **Processes** in WorkZone Configuration Management. See [Configure dispatchers](#).

- The **DefaultShipmentTypeKey** setting has been renamed to **DefaultDispatcherSequenceId**. See Configure dispatch sequences.
- The preliminary history document is no longer needed and has been removed. **DummyPDFDocumentId** setting is no longer used and has been removed. The history document now shows the watermark "Preliminary" while in process.
- A new ProcessMonitor service workflow that can monitor for failed processes. See Process Monitor.
- You can now configure a history document for each process using four new settings, **ReportId**, **RecordType**, **RecordState**, and **TitleTemplate**. customize the process history document. See Configure the process history document.
- You can now create customized lists to display in the **Processes** overview and share these lists across an organization. See Create and share lists.

WorkZone Process 2017 SP1

- A new section on how to set up the SmartPost add-on package has been added. See Configuring SmartPost.
- The WorkZone Case Activities package is now in production. In the 2017 release, this package was released as a Beta version. For instructions on configuring case activity lists, see [Case activities](#) in the WorkZone Configurator online Help.
- A new section about how you can set up the Exchange server to handle concurrent Exchange connections on the same user in connection with the Mailbox Monitor and F2 integration service workflows.
- If you upgrade from 2016 R2 to 2017 SP1 and use the Mailbox Monitor process service, see [Upgrading from previous versions](#).
- New settings have been added to the Extended Submission process. With these settings, you can manage what will happen when a submission is started, approved, completed, or rejected. In WorkZone Configuration Management, click **Operation > Processes**, select the **Submission (Extended)** process to view settings. See Configure extended submission.
- You can now remove a failed process from the **Errors and Warnings** list in the **Processes Overview** list using WorkZone Configuration Management. In

WorkZone Configuration Management, click **Diagnostic > Process State** and change the state of the process in question to **Resolved** in the **State** field.

- Process history documents are now created using a WorkZone PDF template. The template can be customized to an organization's needs.

WorkZone Process 2017

- Support for multiple databases. See [Configuration for multiple databases](#).
- An additional service workflow, the Mailbox Monitor, has been added. The mail box monitor can monitor an inbox and save incoming mails to a case. See [Mailbox Monitor](#).
- For this version, a Beta release of the Case activities functionality will be available. Case activities is a task management feature that enable you to create workflows with activities that are connected by a set of rules. With case activities you can map the possible events in a workflow and associate each event with a rule that calls for a certain action.
- A new setting has been added in the WZP_SETTINGS table to enabled when you use AD Replication to recycle names in WorkZone Process. See [Configure the use of new name instances](#).
- Two new parameters have been added to the WZP_SERVICE_PARAMETERS table.
 - F2PartyMap
 - F2Template

See [Install and configure F2 integration](#) and F2 integration.

- The following has been added to the Troubleshooting section.
 - When you get to the point in the configuration of WorkZone Process where you start the WorkZone Process web service, you might receive an error with the message "403 Forbidden". The error indicates that OData information cannot be accessed and you cannot complete the configuration.
 - Creating a process in WorkZone Process fails and you get an error message stating that there is no access to the server.


Configuring processes

You can configure how processes should run in your organization by specifying parameters for each process in WorkZone Configurator.

You set up general WorkZone Process settings in **Process settings** in WorkZone Configurator.

Configure extended submission

When an extended submission process is part of a phase process, you can manage, promote (move forward), and demote (move back) actions when the extended submission process is started, approved, completed, or rejected.

1. In WorkZone Configurator, click **Process**.
2. Click **Processes**.
3. Point to the **Submission (Extended)** process, and click  **Edit parameters**.
4. Specify the parameters depending on how you want the process to execute.

PromoteOnEnter	Moves to the next phase in the phase process when a submission starts. The default value is False .
PromoteBeforeClose	Moves to the next phase in the phase process when the last approver has approved. The default value is False .
PromoteOnExit	Moves to the next phase in the phase process when the submission ends. The default value is True .
DemoteOnReject	Moves to the previous phase in the phase process if the submission is rejected. The default value is False .
NotificationsDefaultActions	The default actions that will be selected on the Notifications tab in the Start Submission (Extended) dialog box. When

the selected actions are performed in the submission process, notifications emails will be sent to the employees that the process owner has selected. See [Start an extended submission process](#) in the WorkZone Process User Guide.

The parameters **ReportID**, **RecordType**, **RecordState**, and **TitleTemplate** relate to the history document. See Configure the process history document.

See also [Processes](#) in the WorkZone Configurator Administrator Guide.

Configure a ministerial process

You can configure the ministerial process to move forward automatically between the phases.

Move from the Processing phase to the Submission phase automatically

To move from the Processing phase to the Submission phase automatically, you must configure the extended submission process to move to the next phase when the extended submission is started.

You need to set the **PromoteOnEnter** setting for the extended submission to **True**. See Configure extended submission.

Move to the next phase automatically based on a role

You can configure the ministerial process to move forward to the next phase based on a role. You can, for example, have the Submission phase move to the Approval phase automatically when the extended submission process reaches a specific actor, such as a unit or an employee with a specific role, for example **MANSEC** (Management secretariat).

Add roles

You add roles in WorkZone Configuration Management.

- Click **Basic Data > Custom domain**, and select the **WZP-ROLE** domain.

By default, WorkZone Process includes the roles listed below.

Role	Description
CASEHNDL	Case handler
DIRECTOR	Director
MANAGER	Manager
MANSEC	Management secretariat
MINISTER	Minister

Configure "move to next phase" according to role

The next step is to set up roles for each phase in WorkZone Configurator.

1. In WorkZone Configurator, click **Processes**.
2. Click **Processes**.
3. Point to the **Ministerial** process. A menu bar appears.
4. Click **Edit**.
5. In the **Edit process parameters** dialog box, select roles for the phases depending on how you want the process to execute. In this example, select the `MANSEC` role as default value for **Role4** in order for the Submission phase to move to the Approval phase automatically when the extended submission process reaches an actor with the role `MANSEC`

Assign roles to an organizational unit or an **employee**

You set up the default process role on either an organizational unit or an employee on the WorkZone contact by using ScanSQL.

Example: You want the ministerial process to move from the Submission phase to the Approval phase when it reaches the employee named Elisabeth. Execute the following in ScanSQL:

```
update name set default_process_role = 'MANSEC' where name_code =
'ELISABETH'
```

Important: If you have added roles in WorkZone Configuration Management, you must recycle the WzpSvc AppPool for the role-based configuration to take effect. Recycling of the AppPool is not necessary if you use the default roles.

Service workflows

A service workflow is a workflow that runs continuously in the environment where it is started. The service workflow can start any kind of workflow, based on the defined service parameters. One example of a service workflow is a workflow that monitors a mailbox, and starts workflows based on incoming mails.

F2 integration

With the F2 add-on package installed, the phase process capabilities of WorkZone Process become available in the communication between work groups that use F2 and WorkZone, respectively.

Overview

- When a requisition from an F2 work group is received in WorkZone, a case is automatically created, and a Ministerial phase process is started.
- A case handler is automatically appointed according to the requisition and the case handler receives the requisition as a smarttask.
- The case handler can work with the process and add contributors. When the contributors have completed their tasks, the case handler can submit the input from WorkZone Process to F2.

Monitor mailboxes for requisitions

Emails with requisitions that will be processed in WorkZone Process are identified by a mail monitor. The mailboxes that receive F2 requisitions must be set up with a mail monitor that polls for emails with an XML attachment. The XML attachment serves the following purposes:

- It identifies emails with requisitions that should start a service workflow.
- It contains information about responsibilities and deadlines and this information is used in the service workflow.

Emails that do not have an XML attachment are disregarded by the mail monitor.

For more information about setting up mail monitors, see [Install and configure F2 integration](#).

Requisition instructions

A document may be available for additional descriptions or instructions. The document is saved on the case that is created based on the requisition.

You specify a template for the instruction document using the **F2Template** parameter in WorkZone Configurator. For more information about the **F2Template** parameter, see the parameter overview in [Install and configure F2 integration](#)

Requisitions that you receive in a mailbox

Requisitions that are received in a mailbox are either issued with the mailbox on the TO line or with the mailbox on the CC line.

Mail recipients on the TO line

- When an F2 requisition is identified in a mailbox where this mailbox is on the TO line, a case is created and a Ministerial phase process is started.
- Any documents from the requisition are attached to the case, and case details such as case handler and case unit are derived from the XML document attached to the F2 requisition. Note that all parties are looked up in existing contacts.
- A phase process of the type Ministerial is created. Service workflow details such as the title of the workflow and F2 specific deadlines are derived from the XML document. The phase approval deadline is calculated as the deadline specified in the XML minus two days.

Mail recipients on the CC line

- When an F2 requisition is identified in a mailbox where the mailbox is on the CC line, the mail is saved on a shared case, and a predefined mailbox receive a notification about the requisition. The notification contains a link to the default case and to the requisition.
- The shared case that is used for this information is created automatically when a mail with a mailbox recipient on the CC line is registered. For more information about

automatic creation of a case, see [F2 integration](#) in the WorkZone Installation Guide.

- The mailbox that receives information about the requisition is set up in the **F2InformationMailBox** parameter in WorkZone Configurator.

Why do I receive requisition emails that I have received once before?

If you experience that the same requisition email is sent to you more than once, it might be due to one of the following changes:

- A service handle name has been changed for a service that monitors the mailbox that handles your requisitions.
- A new service with a new service handle name has been created for the mailbox that handles your requisitions.

Both of the changes mentioned above have the effect that all requisition emails are handled once again. For more information about the **ServicHandleName** parameter, see [Install and configure F2 integration](#).

Parties associated with cases and documents

When an F2 requisition is identified in a mailbox, cases are created and documents are saved. Parties associated with the cases and documents can be controlled by the **F2PartyMap** parameter in WorkZone Configurator. See the **F2PartyMap** parameter, see [Install and configure F2 integration](#).

The **F2PartyMap** parameter is NOT specified

When the **F2PartyMap** parameter is not specified, the contacts become parties on documents and cases:

- Cases: The mail recipient, the return-to user, and any CC recipients.
- Documents on cases: The sender, the recipient, and any CC recipient.

The **F2PartyMap** parameter is specified

When the **F2PartyMap** parameter, individual email addresses are mapped to a contact name codes as specified in WorkZone Client:

- When an F2 case is created based on a requisition, the parties on the case include contacts that are specified by the **F2PartyMap** parameter. For example, say that a case is created based on an email sent by Elisabeth@Fvst.dk to Ann@lmdom.local, and the **F2PartyMap** parameter specifies that the fvst and the lmdom domains should map to the contacts FOODAUTHORITY and FSA, respectively. This would mean that apart from Elisabeth and Ann, the FOODAUTHORITY and the FSA contacts are included as parties on the F2 case and documents that are created by the F2 service workflow.

Updated F2 requisitions

If F2 requisitions are updated by F2, emails are sent to the monitored inbox. WorkZone identifies the F2 update emails based on the email subject. If an existing case with a corresponding requisition ID is found, it is updated with new information. The case handler and the mailbox that receives information about requisitions (as specified in the **F2InformationMailbox** parameter) are notified about the update in an email. See [Updated requisitions](#) in the WorkZone Process User Guide.

If the requisition case does not exist, the update email is ignored.

The update emails do not contain an XML attachment as the original email from F2.

Cancelled F2 requisitions

If F2 requisitions are cancelled from F2, emails are sent to the monitored inbox. WorkZone identifies the cancelled F2 requisition emails based on the email subject.

The Ministerial phase process will be cancelled but any sub processes must be handled manually. The case handler and the mailbox that receives information about requisitions (as specified in the **F2InformationMailbox** parameter) are notified about the cancellation of the F2 requisition in an email. See [Cancelled requisitions](#) in the WorkZone Process User Guide.

Replies to F2

When a requisition has been processed, it can be delivered to F2 using the **F2 Delivery** sub process. The following recipients get the delivery:

- The case handler in the F2 work group. The case handler is identified by a return field in the requisition XML. For more information, see [How XML information maps to an F2 requisition workflow](#).
- A mailbox that is set up for the F2 work group. Via this mailbox information can be routed to people in the work group that should be notified about the delivery. The mailbox is defined in the **F2InformationMailbox** parameter in WorkZone Configurator. For more information, see [Configure recipients of F2 answers](#).
- Additional recipients in the WorkZone environment. These recipients are people that should be notified about the delivery. You can add these recipients manually when you return the delivery to F2. For more information, see [Return input to F2](#) in the online Help for WorkZone Process.

How XML information maps to an F2 requisition workflow

The following table describes the attributes of the case that is created when an F2 requisition is sent from F2 to a WorkZone mailbox. The attributes are mapped from an XML document attached to the F2 requisition.

F2 requisition contacts must be matched with contact information that exists in the system. For more information, see [Searching the WorkZone contacts for F2 parties](#).

Case attributes	XML fields	How information maps from XML to WorkZone Process fields
ID	<ID>	The F2 requisition ID field is populated with the requisition ID from the <ID> field in the XML.
Receiver name and unit	<ReceiverUserName>, <ReceiverUnitName>	The Case handler and the Case unit fields are automatically populated with the information from the <ReceiverUserName> and the <ReceiverUnitName> fields. When an email with an XML attached is sent to <ReceiverUserName>, a user task is sent to this person and a process is started for this person.
Return information	<ReturnToEmail> <ReturnToUser-	The return-to fields are populated with recipients of the requisition after it has been processed. The recipient information is retrieved from the <ReturnToE-

Case attributes	XML fields	How information maps from XML to WorkZone Process fields
	Name> <ReturnToUnitName>	<p>mail>,<ReturnToUserName>, and the <ReturnToUnitName> fields. The fields are searched in this order to identify a valid receipt address.</p> <p>Delivery to the F2 work group can be completed using the F2 Delivery process task.</p> <p>Note, that the return-to recipients are recipients within the F2 environment, that should be informed about the delivery. A mailbox for F2 return deliveries must also be stated in the F2AnswerMailBox parameter in the WZP_SERVICE_PARAMETER table. For more information about the parameter setup, see Monitor mail activity.</p>
Sender information	<SentByUserName> <SentbyUnitName>	External sender fields can be shown on the case and populated with the external sender information from the <SentByUserName> and the <SentbyUnitName> fields.
Description	<Description>	The description fields are automatically populated with the information from the <Description> field.
Case title	<RequisitionChoices> <Title>	<p>The title of the case is combined from the <RequisitionChoices> strings and the <Title> field.</p> <p>For example:</p> <pre><RequisitionChoices><string>\$ 20-question</string> <string>Urgent</string></RequisitionChoices> and <Title>Transport Regulations</Title> merge into the case title, "[Urgent] [\$ 20-question] Transport Regulations"</pre>
Case number	<CaseNumber>	The External case number field can be shown on the case and populated with the case number from the

Case attributes	XML fields	How information maps from XML to WorkZone Process fields
		<CaseNumber> field.
Case type		By default, the case type is set to SJ-TEMP.

Searching the WorkZone contacts for F2 parties

When an F2 service workflow is started, the F2 requisition identifies the parties of the requisition. The requisition parties are persons that must be matched with contacts in WorkZone.

The F2 requisition party information is available in the XML file, which is part of the F2 requisition and the information in the XML file may vary in terms of detail levels.

In some cases both a name and an email address is available and in other cases only a name (Name1 + Name2) is stated.

The search for a match of contacts is processed in the following sequence:

1. Email address.
2. Name1 + Name2
3. NameCode.

F2 integration

With the F2 add-on package installed, the phase process capabilities of WorkZone Process become available in the communication between work groups that use F2 and WorkZone, respectively.

Overview

- When a requisition from an F2 work group is received in WorkZone, a case is automatically created, and a Ministerial phase process is started.
- A case handler is automatically appointed according to the requisition and the case handler receives the requisition as a smarttask.
- The case handler can work with the process and add contributors. When the contributors have completed their tasks, the case handler can submit the input from WorkZone Process to F2.

Monitor mailboxes for requisitions

Emails with requisitions that will be processed in WorkZone Process are identified by a mail monitor. The mailboxes that receive F2 requisitions must be set up with a mail monitor that polls for emails with an XML attachment. The XML attachment serves the following purposes:

- It identifies emails with requisitions that should start a service workflow.
- It contains information about responsibilities and deadlines and this information is used in the service workflow.

Emails that do not have an XML attachment are disregarded by the mail monitor.

For more information about setting up mail monitors, see [Install and configure F2 integration](#).

Requisition instructions

A document may be available for additional descriptions or instructions. The document is saved on the case that is created based on the requisition.

You specify a template for the instruction document using the **F2Template** parameter in WorkZone Configurator. For more information about the **F2Template** parameter, see the parameter overview in [Install and configure F2 integration](#)

Requisitions that you receive in a mailbox

Requisitions that are received in a mailbox are either issued with the mailbox on the TO line or with the mailbox on the CC line.

Mail recipients on the TO line

- When an F2 requisition is identified in a mailbox where this mailbox is on the TO line, a case is created and a Ministerial phase process is started.
- Any documents from the requisition are attached to the case, and case details such as case handler and case unit are derived from the XML document attached to the F2 requisition. Note that all parties are looked up in existing contacts.
- A phase process of the type Ministerial is created. Service workflow details such as the title of the workflow and F2 specific deadlines are derived from the XML

document. The phase approval deadline is calculated as the deadline specified in the XML minus two days.

Mail recipients on the CC line

- When an F2 requisition is identified in a mailbox where the mailbox is on the CC line, the mail is saved on a shared case, and a predefined mailbox receive a notification about the requisition. The notification contains a link to the default case and to the requisition.
- The shared case that is used for this information is created automatically when a mail with a mailbox recipient on the CC line is registered. For more information about automatic creation of a case, see [F2 integration](#) in the WorkZone Installation Guide.
- The mailbox that receives information about the requisition is set up in the **F2InformationMailBox** parameter in WorkZone Configurator.

Why do I receive requisition emails that I have received once before?

If you experience that the same requisition email is sent to you more than once, it might be due to one of the following changes:

- A service handle name has been changed for a service that monitors the mailbox that handles your requisitions.
- A new service with a new service handle name has been created for the mailbox that handles your requisitions.

Both of the changes mentioned above have the effect that all requisition emails are handled once again. For more information about the **ServicHandleName** parameter, see [Install and configure F2 integration](#).

Parties associated with cases and documents

When an F2 requisition is identified in a mailbox, cases are created and documents are saved. Parties associated with the cases and documents can be controlled by the **F2PartyMap** parameter in WorkZone Configurator. See the **F2PartyMap** parameter, see [Install and configure F2 integration](#).

The **F2PartyMap** parameter is NOT specified

When the **F2PartyMap** parameter is not specified, the contacts become parties on documents and cases:

- Cases: The mail recipient, the return-to user, and any CC recipients.
- Documents on cases: The sender, the recipient, and any CC recipient.

The **F2PartyMap** parameter is specified

When the **F2PartyMap** parameter, individual email addresses are mapped to a contact name codes as specified in WorkZone Client:

- When an F2 case is created based on a requisition, the parties on the case include contacts that are specified by the **F2PartyMap** parameter. For example, say that a case is created based on an email sent by Elisabeth@Fvst.dk to Ann@lmdom.local, and the **F2PartyMap** parameter specifies that the fvst and the lmdom domains should map to the contacts FOODAUTHORITY and FSA, respectively. This would mean that apart from Elisabeth and Ann, the FOODAUTHORITY and the FSA contacts are included as parties on the F2 case and documents that are created by the F2 service workflow.

Updated F2 requisitions

If F2 requisitions are updated by F2, emails are sent to the monitored inbox. WorkZone identifies the F2 update emails based on the email subject. If an existing case with a corresponding requisition ID is found, it is updated with new information. The case handler and the mailbox that receives information about requisitions (as specified in the **F2InformationMailbox** parameter) are notified about the update in an email. See [Updated requisitions](#) in the WorkZone Process User Guide.

If the requisition case does not exist, the update email is ignored.

The update emails do not contain an XML attachment as the original email from F2.

Cancelled F2 requisitions

If F2 requisitions are cancelled from F2, emails are sent to the monitored inbox. WorkZone identifies the cancelled F2 requisition emails based on the email subject.

The Ministerial phase process will be cancelled but any sub processes must be handled manually. The case handler and the mailbox that receives information about requisitions (as specified in the **F2InformationMailbox** parameter) are notified about the cancellation of the F2 requisition in an email. See [Cancelled requisitions](#) in the WorkZone Process User Guide.

Replies to F2

When a requisition has been processed, it can be delivered to F2 using the **F2 Delivery** sub process. The following recipients get the delivery:

- The case handler in the F2 work group. The case handler is identified by a return field in the requisition XML. For more information, see [How XML information maps to an F2 requisition workflow](#).
- A mailbox that is set up for the F2 work group. Via this mailbox information can be routed to people in the work group that should be notified about the delivery. The mailbox is defined in the **F2InformationMailbox** parameter in WorkZone Configurator. For more information, see [Configure recipients of F2 answers](#).
- Additional recipients in the WorkZone environment. These recipients are people that should be notified about the delivery. You can add these recipients manually when you return the delivery to F2. For more information, see [Return input to F2](#) in the online Help for WorkZone Process.

How XML information maps to an F2 requisition workflow

The following table describes the attributes of the case that is created when an F2 requisition is sent from F2 to a WorkZone mailbox. The attributes are mapped from an XML document attached to the F2 requisition.

F2 requisition contacts must be matched with contact information that exists in the system. For more information, see [Searching the WorkZone contacts for F2 parties](#).

Case attributes	XML fields	How information maps from XML to WorkZone Process fields
ID	<ID>	The F2 requisition ID field is populated with the requisition ID from the <ID> field in the XML.

Case attributes	XML fields	How information maps from XML to WorkZone Process fields
Receiver name and unit	<ReceiverUserName>, <ReceiverUnitName>	<p>The Case handler and the Case unit fields are automatically populated with the information from the <ReceiverUserName> and the <ReceiverUnitName> fields.</p> <p>When an email with an XML attached is sent to <ReceiverUserName>, a user task is sent to this person and a process is started for this person.</p>
Return information	<ReturnToEmail> <ReturnToUserName> <ReturnToUnitName>	<p>The return-to fields are populated with recipients of the requisition after it has been processed. The recipient information is retrieved from the <ReturnToEmail>, <ReturnToUserName>, and the <ReturnToUnitName> fields. The fields are searched in this order to identify a valid receipt address.</p> <p>Delivery to the F2 work group can be completed using the F2 Delivery process task.</p> <p>Note, that the return-to recipients are recipients within the F2 environment, that should be informed about the delivery. A mailbox for F2 return deliveries must also be stated in the F2AnswerMailBox parameter in the WZP_SERVICE_PARAMETER table. For more information about the parameter setup, see Monitor mail activity.</p>
Sender information	<SentByUserName> <SentbyUnitName>	External sender fields can be shown on the case and populated with the external sender information from the <SentByUserName> and the <SentbyUnitName> fields.
Description	<Description>	The description fields are automatically populated with the information from the <Description> field.
Case title	<RequisitionChoices> <Title>	<p>The title of the case is combined from the <RequisitionChoices> strings and the <Title> field.</p> <p>For example:</p>

Case attributes	XML fields	How information maps from XML to WorkZone Process fields
		<pre><RequisitionChoices><string>\$ 20-question</string> <string>Urgent</string></RequisitionChoices> and <Title>Transport Regulations</Title> merge into the case title, " [Urgent] [\$ 20-question] Transport Regulations"</pre>
Case number	<CaseNumber>	The External case number field can be shown on the case and populated with the case number from the <CaseNumber> field.
Case type		By default, the case type is set to SJ-TEMP.

Searching the WorkZone contacts for F2 parties

When an F2 service workflow is started, the F2 requisition identifies the parties of the requisition. The requisition parties are persons that must be matched with contacts in WorkZone.

The F2 requisition party information is available in the XML file, which is part of the F2 requisition and the information in the XML file may vary in terms of detail levels.

In some cases both a name and an email address is available and in other cases only a name (Name1 + Name2) is stated.

The search for a match of contacts is processed in the following sequence:

1. Email address.
2. Name1 + Name2
3. NameCode.

Install and configure F2 integration

F2 integration is a service workflow that you can select as a package when you configure WorkZone Process.

Follow the instructions below to activate the F2 integration. These guidelines assume that WorkZone Process is already installed on your system. If WorkZone Process is not installed, refer to [Install WorkZone Process](#) in the WorkZone Installation Guide and follow the guidelines for the installation.

Activate the F2 Integration package

1. Open WorkZone Configurator.
2. Go to **Global > Feature settings > WorkZone Process**.
3. Select the check box next to **F2**.

Monitor email activity

The F2 integration requires monitoring of email activity in a mailbox. You specify which mailbox to monitor, and how often the mailbox will be checked for emails.

In general, the email activity in an F2 mailbox is monitored by the Exchange user that owns the mailbox. If you need to set up the mailbox to be monitored by a user different from the owner of the mailbox, see [Provide access to monitor an F2 mail account](#).


You configure the F2 mailbox monitor by specifying parameters for the **F2 requisition handler** service workflow in WorkZone Configurator.

You need to create an F2 requisition handler service workflow for each mailbox that you want to monitor.

Create and configure an F2 requisition handler service workflow in WorkZone Configurator

The F2 integration service uses mail monitors that require a set of F2 service parameters. You define the parameters in WorkZone Configurator.

1. Open WorkZone Configurator.
2. Go to **Process > Service workflows**.
3. Add a new service workflow of the type **F2 requisition handler**, enter a name and description, and then click **Create**.

4. Point to the **F2 requisition handler** service workflow, and click  **Edit parameters**, and fill in the value for the parameters. The values that you enter, must correspond to the values that are set up for your environment. For an example, refer to the list of parameters in the following table.

You can only set up one F2 mailbox monitor in a standard access code setup. In a corporate access code setup, you can set up one F2 mailbox monitor per authority.

Refer to the following table for an overview of the parameter values required for the F2 requisition handler workflow. Note that the values listed in the table are just examples.

Name	Description	Sample values
DefaultOwner	<p>The user who becomes the owner of the process. The user must be a WorkZone user and the name must be capitalized.</p> <p>The default process owner may also be a unit with an email address.</p>	
DefaultReceiver	<p>If specified, the user who should receive the requisition.</p>	
ExchangeUrl	<p>The URL of the Exchange web service.</p>	<p>http://d-c1.lmdom.local/EWS/Exchange.asmx</p>
ExchangeDomain	<p>The domain for the Exchange user.</p>	<p>lmdom</p>
ExchangeUser	<p>Login for the Exchange user. The Exchange user must</p>	<p>SJSERVICEAGENTUSER4</p>

Name	Description	Sample values
	<p>have access to the Exchange mailbox. For more information, see Provide access to monitor an F2 mail account.</p>	
ExchangePassword	The password for the Exchange user.	<password>
ExchangeMailBox	The email address of the mailbox to be monitored.	ann@lmdom.local
WatchInterval	Interval in seconds between checks of the Exchange mailbox for new requisition emails. With an entry of 60, the mailbox is checked every minute.	60
RetryInterval	The interval in seconds between resending of mails that failed. If this parameter is shorter than WatchInterval, it has no effect.	5
RetryCount	The number of retries before mails are abandoned.	2
ServiceHandleName	The name used by a service to mark a	F2Handle

Name	Description	Sample values
	<p>mail as handled.</p> <p>This parameter is used if a mailbox is monitored by more than one service. The ServiceHandleName must be unique for each service.</p> <p>Note, that if you change a service handle name for a service that monitors a specific mailbox or if you create a new service for the same mailbox with a new service handle name, all requisition mails will be handled again.</p>	
F2InformationCaseNo	<p>The case number of a case that stores requisitions received as CC. This case exists in the WorkZone Content Server database.</p>	16-80/1
F2InformationMailBox	<p>Address of a mailbox that receives information about requisition emails that are received as CC by</p>	testadmin@lmdom.local

Name	Description	Sample values
	the owner of the Exchange mailbox.	
F2AnswerMailBox	Address of the mailbox that should receive a copy of the answer mails that are sent as F2 deliveries.	susan@lmdom.local
F2PartyMap	Enables mapping of parties that should be associated with cases and documents. A company-specific email domain is mapped with a name contact code and a name contact type. For a series of mappings, each mapping must be separated by a semicolon. Invalid name codes and name types and missing email domains will be skipped.	Fvst.dk,F-FOODAUTHORITY;lmdom.local,A-FSA;
IncludeTemplate	Turn on IncludeTemplate if you want to include a document with instructions on how, for example, to handle F2 requis-	

Name	Description	Sample values
	<p>itions. You can select a document to use in the F2Template field.</p> <p>The parameter is enabled by default.</p> <p>The document template must have the type SKAB.</p>	
<p>F2Template</p>	<p>Select a Word document that will be used for building a document with instructions. If you do not select a document, a default Word document containing the F2 description will be used.</p> <p>If a document is created, it is saved on the case and added to smarttask.</p>	

Provide access to monitor an F2 mail account

Mails sent to an F2 mailbox can be monitored by the exchange user that owns the mailbox. As an alternative, the F2 mailbox can be monitored by a user different from the owner of the mailbox.

If you want the F2 mailbox to be monitored by a user different from the owner of the mailbox, ExchangeUser can be given access rights to the mailbox.

Delegate access to a mailbox

Follow the steps to give ExchangeUser access rights to an F2 mailbox.

The F2 mailbox is the mailbox defined for the ExchangeMailBox parameter in the WZP_SERVICE_PARAMETERS table.

From Outlook:

1. As the owner of the mailbox (ExchangeMailBox), open Outlook.
2. Click the **File** tab, and select **Account settings > Delegate access**, then click **Add**.
3. Select the user that is defined for the ExchangeUser parameter.
4. Click **Add > OK**, and in the **Tasks** field, select **Editor**.
5. Click the **Home** tab, and select the Inbox.
6. Right-click the Inbox, and click **Properties**.
7. Click the **Permissions** tab, select the user to be given permissions, and, in the **Permission level** field, select the **Editor** role. Optionally, you can clear the **Create Item** check box.

You can select a role that has more permissions, such as **Publishing editor** or **Owner**, but you cannot select a role with fewer permissions.

On Exchange

1. As an Exchange administrator, open a Windows PowerShell prompt.
2. Enter one of the following commands to load the Exchange snap-in that corresponds to the Exchange version you are using:

```
Add-PSSnapin Microsoft.Exchange.Management.PowerShell.E2010
Add-PSSnapin Microsoft.Exchange.Management.PowerShell.E2016
```

3. Enter the following command:

```
Add-MailboxFolderPermission <Mailbox> -AccessRight ReadItems,
FolderVisible, EditOwnedItems, EditAllItems, DeleteOwnedItems,
DeleteAllItems -User <monitor user>
```

Where `mailbox` is the mailbox you want to monitor and `monitor user` is the user who will monitor the mailbox. In this example, the permission to create items is disabled.

4. Repeat step 3 for each mailbox you want to monitor.

Mailbox monitor

The mailbox monitor is a service workflow that can monitor one or more Outlook mailboxes and save incoming emails as documents on cases.

Cases for incoming mails

The case on which the Mailbox Monitor service workflow saves incoming emails is identified as follows:

- If an email title contains a case number in brackets such as "[00001234-2016]" and the case exists, the mail is saved on this case.
- If an email title does not contain a case number in brackets and a default case is specified in the service parameters, all incoming emails are saved on the default case.
- If there is no case number in an email title or if a default case is not identified, a new case is created for individual emails. The new case gets the title of the email subject and the sender, recipients, and CC recipients are added as case parties.

The Mailbox Monitor service workflow does not handle emails that have the monitored mailbox as BCC recipient. These emails are not saved.

Unsaved emails

In some cases, incoming emails are not saved on cases due to issues in the emails or their attachments. To get an overview of unsaved emails that must be saved manually, you can set up the Mailbox Monitor service workflow to move the faulty emails to a specific Outlook folder, and in this way separate the faulty emails from the emails in the monitored mailbox. The folder with the faulty emails is a subfolder of the monitored mailbox. A user must then save the faulty emails on cases manually.

You can specify the email address of a user who will then receive a notification email when an email is not saved automatically due to errors.

To handle unsaved emails, specify the `FaultedFolderName` and `FaultNotificationMailbox` parameters in WorkZone Configurator.

Configure a Mailbox Monitor service workflow

The Mailbox Monitor service workflow monitors email activity in one or more mailboxes. The service workflow defines which mailboxes are monitored, and how often the mailboxes are checked for emails. You can create service workflows in WorkZone Configurator. See [Service workflows](#) in the WorkZone Configurator Administrator Guide.


Important: The number of mailboxes that the Mailbox Monitor service workflow can monitor depends on the capacity of the environment. The number of monitored mailboxes and the number of emails that the mailboxes receive will impact the system memory, disk space, and load. Please contact WorkZone support for technical advice if you plan to monitor many mailboxes with a high volume of emails. For example, more than 10 mailboxes and 100 emails per day per mailbox.


Configure a Mailbox Monitor service workflow in WorkZone Configurator

Prerequisites:

- The Exchange user must have the **Delegate** access with **Editor** permission on the inboxes that you want to monitor. See the ExchangeUser parameter. In Outlook, log on to each of the Exchange mailboxes that you want to monitor, and go to **File > Account Settings > Delegate access** and add the Exchange user as a delegate.
- The Exchange user must have publishing editor rights. To verify that the permissions are correct, right-click the inbox and click **Properties > Permission** tab. Verify that the Exchange user has the permission level **Publishing Editor**

WorkZone and that the **Create subfolders** check box is selected.

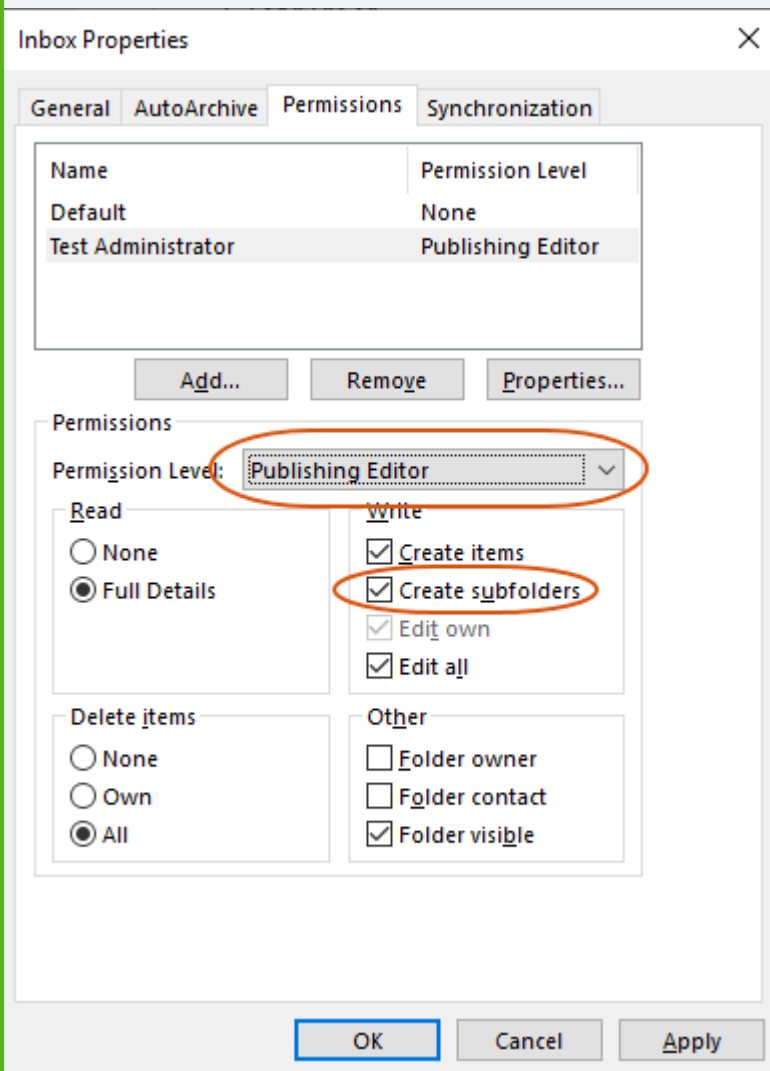

1. Open WorkZone Configurator.
2. Click **Process > Service workflows**.
3. Point to the **Mailbox monitoring** service workflow that you just created, and click  **Edit parameters** to configure the service workflow.
4. Enter values for the parameters.

If you want the service workflow to monitor multiple mailboxes, pay attention to the configuration of the following parameters:

- ExchangeMailBox
- DefaultCase

- FaultedFolderName
- FaultNotificationMailbox
- RecipientAddressProperty

Name	Description	Sample value
ExchangeUrl	The URL of the Exchange web service.	http(s)://<host>/EWS/Exchange.asmx.
ExchangeDomain	The domain of the Exchange user.	<MyCompanyDomain>
ExchangeUser	Login of the Exchange user. This user must have access to the Exchange mailbox.	
ExchangePassword	The password of the Exchange user.	
ExchangeMailBox	The email address of the mailbox to be monitored. If you want to monitor multiple mailboxes, separate the mailbox addresses by commas.	
WatchInterval	The interval in seconds between checking the Exchange mailbox for new emails. A value of 60 - 300 seconds is suitable in most cases.	60
RetryInterval	The interval in seconds between rereading emails that failed to be read. The	300

Name	Description	Sample value
	<p>value must be higher than the watch interval to have effect.</p> <p>This value should be 2 - 5 times larger than the value for the WatchInterval settings.</p>	
RetryCount	<p>The number of times a rereading of the emails is attempted before the emails are abandoned</p> <p>A value of 2 - 5 times is appropriate.</p>	2
ServiceHandleName	<p>The name used by a service to mark an email as handled. The ServiceHandleName must be unique for each service and never be changed for a specific mailbox.</p> <p>Any unique combination of letters and numbers.</p>	
ProcessOwner	<p>The user that will be assigned as process owner.</p> <p>The process owner may also be an organizational unit.</p>	
DefaultCase	<p>The case number of the default case that is used for incoming emails. If it is not</p>	Optional value.

Name	Description	Sample value
	<p>specified, each email will be saved on a new case.</p> <p>If you monitor multiple mailboxes, the default case will be a combined case for all incoming emails in any of the monitored mailboxes.</p>	
DefaultOfficer	The user that will become case handler on the cases that are created. If it is not specified, no case handler is assigned.	Optional value.
DefaultCaseGroup	The case group that will be assigned to new cases. If not specified, SJ-TEMP is used.	Optional value.
AttachmentsIsAppendices	Email attachments are stored as supplementary documents. If it is not enabled, the email attachments will be saved as main documents.	Optional value. If “AttachmentsIsAppendices” is enabled, the document state cannot be ‘AFS’.
NotificationReceivers	The users who will receive a notification when an email is received. If you do not specify recipients, no notifications are sent.	
DocumentState	The document state that the documents will be saved with. If it is not specified, the document state will be ARK.	If “DefaultCaseGroup” is not defined, the document state cannot be ‘AFS’.

Name	Description	Sample value
Authority	The current authority to grant access to the case. Mandatory for corporate access codes.	This value is ignored for a WorkZone standard access codes setup, but it is mandatory for a WorkZone corporate access codes setup.
MailList	The name of the mail list that you want the email documents to be shown on.	Optional value.
MailType	The email document type.	Default value = I.
AttachmentType	The document type of the attachment. Must be a valid value from the AT domain.	Default value = DOK.
SaveSender	<p>The field that the sender's email address is saved to. By default, the email address is saved to the Sent from field. If you do not specify a field, the sender email address will not be saved.</p> <p>You can use a custom field, and in this case, both the sender's email address and name will be saved.</p>	Optional value.
FaultedFolderName	<p>Name of the Outlook folder used for emails that cannot be saved automatically in WorkZone due to issues in the emails or their attachments.</p> <p>The folder will be created</p>	

Name	Description	Sample value
	<p>as a subfolder of the monitored mailbox. The folder will only be created if there are faulty emails.</p> <p>If you monitor multiple mailboxes, a folder with this name will be created as a subfolder of each of the monitored mailboxes.</p>	
FaultNotificationMailbox	<p>The email address of a user who will receive an email notification when an email is not saved automatically.</p> <p>If you monitor multiple mailboxes, the email address that you specify will receive notifications about faulty emails from all monitored mailboxes.</p>	
RecipientAddressProperty	<p>If you monitor several mailboxes with one service workflow, you may want to add a field on the document detail page for the email document that shows to which mailbox the document was sent. If you have set up such a field, add the code for the field here, and it will be populated with the email address.</p>	

Name	Description	Sample value
	See Optional configurations in WorkZone Client.	

If you have configured the Mailbox Monitor service workflow to monitor multiple mailboxes, you can do additional configuration in WorkZone Client, which will make it easier for users to monitor incoming documents per mailbox and work with the documents. See Optional configurations in WorkZone Client.

Optional configurations in WorkZone Client

If you have configured a Mailbox Monitor service workflow to monitor multiple mailboxes, you can do additional configuration in WorkZone Client to make it easier for users to work with the incoming documents that the service workflow creates. The configurations may be relevant, if you have configured a default combined case using the DefaultCase parameter as opposed to creating new cases for all incoming emails.

Create a custom field to display the monitored mailbox on the document detail page

You can, for example, add a custom field on the document detail page that displays the name of the mailbox that the email was sent to. Such a field will also allow the user to select another mailbox if, for some reason, the email was sent to the wrong mailbox.

Create a custom field of the type droplist


1. Open WorkZone Configurator
2. Go to **Document > Custom fields**.
3. Create a new field of the type **Droplist**, for example Monitored mailbox.
4. Go to **Global > Custom droplists**.
5. Create a new droplist, for example Monitored mailboxes.
6. Add the mailbox addresses of the mailboxes you monitor as items on the droplist. Enter the mailbox address in the **Label** field and a code in the **Code**


field.

MBM, Monitored mailboxes			
Code	Label (da-DK)	Label (de-DE)	Label (en-GB)
M1	mailbox1@mycompany.com	mailbox1@mycompany.com	mailbox1@mycompany.com
M2	mailbox2@mycompany.com	mailbox2@mycompany.com	mailbox2@mycompany.com
M3	mailbox3@mycompany.com	mailbox3@mycompany.com	mailbox3@mycompany.com

See [Custom fields](#) and [Custom droplist](#) in the WorkZone Configurator.

Display the custom field on the document detail page


1. In WorkZone Client, create a new configuration or edit an existing configuration. See [Working with configurations](#) in the WorkZone Client Administrator Guide.
2. Click **Document** > **Information** in the main ribbon.
3. Click  **Configure page** at the top right-hand corner to open the **Available fields** pane. Add the custom field to the document detail page.

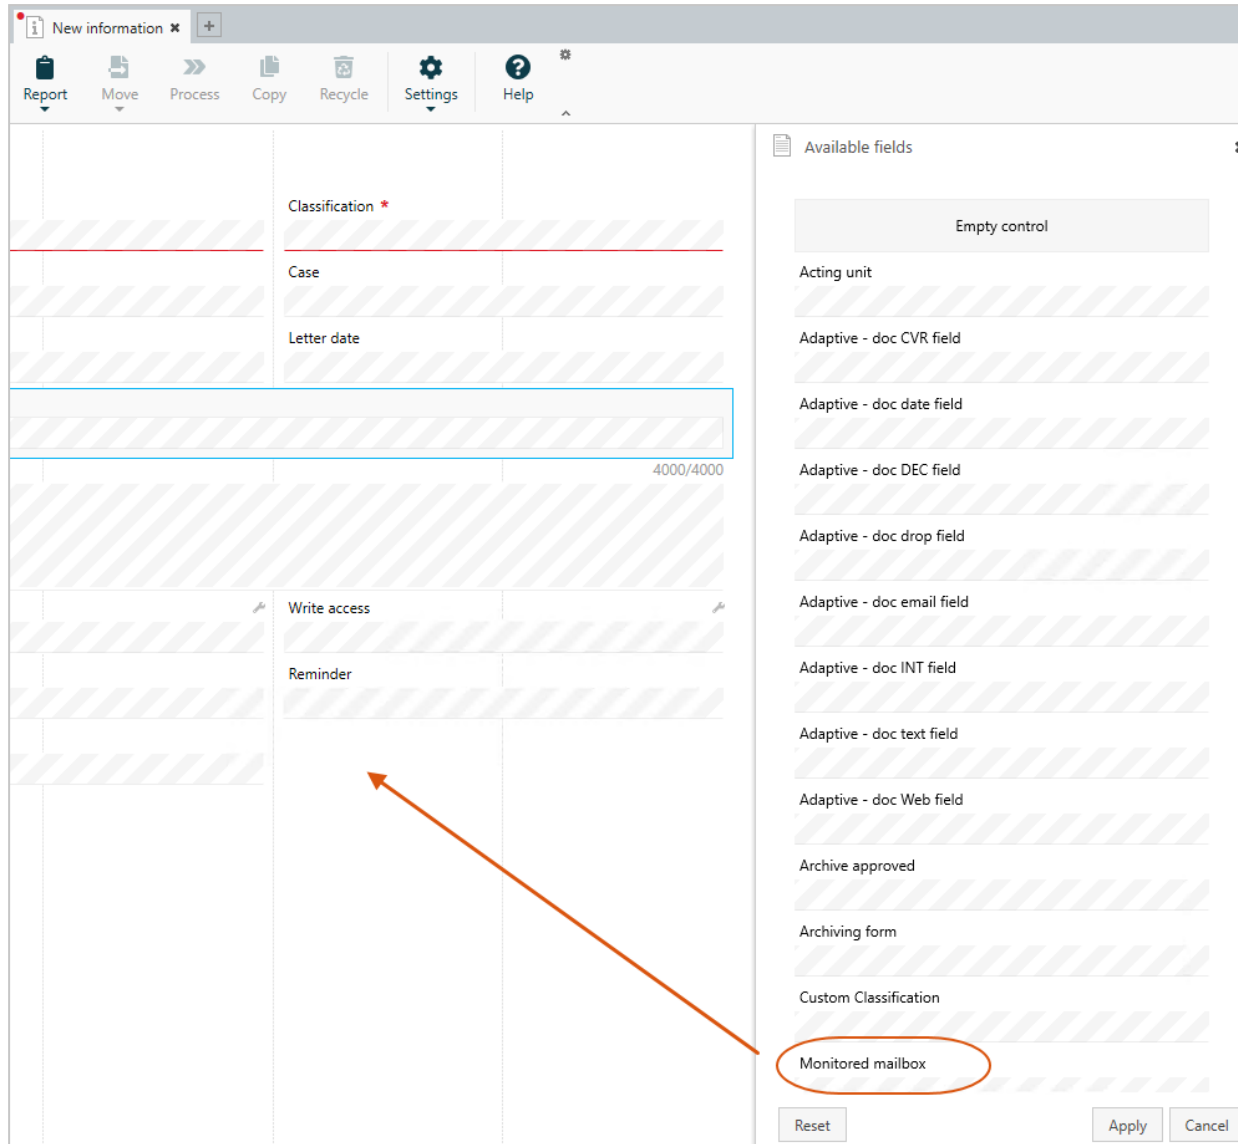

See [Configure a detail page](#) in the WorkZone Client Administrator Guide.

4. Distribute the configuration to your organization. See [Distribute a configuration](#) in the WorkZone Client Administrator Guide.
5. Exit distribution mode.

Users can now see the mailbox and select another mailbox on the document detail page.

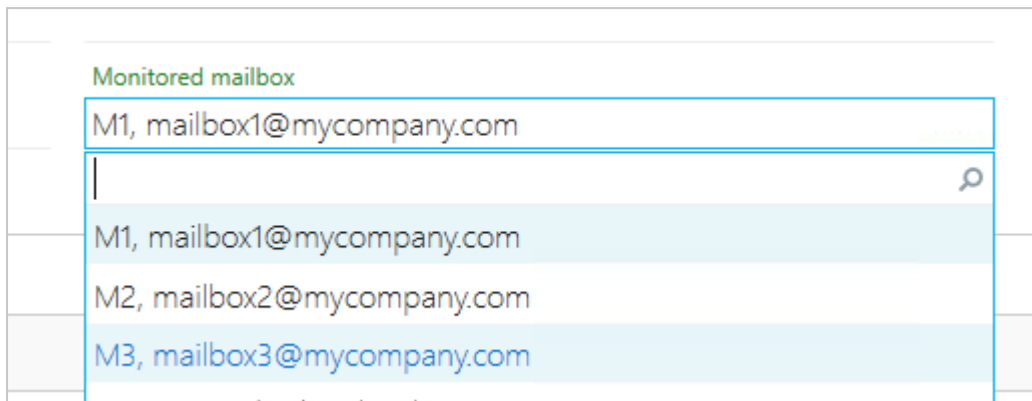

Create saved searches to show incoming documents per mailbox


You can create saved searches that show incoming documents created by Mailbox Monitor per mailbox and, for example, you can display the saved searches on the dashboard in WorkZone Client for easy access.

Create a saved search per mailbox using WorkZone QueryBuilder

1. Open WorkZone QueryBuilder.
2. Select **Documents(Records)** in the **Entity** field.
3. Filter on the mailbox using the custom field code that you just created, in this example filter on the code **M1** using the **Monitored mailbox** field.



4. Click **Save Query**. The saved search now appears in the navigation pane under **OTHER > My lists**.

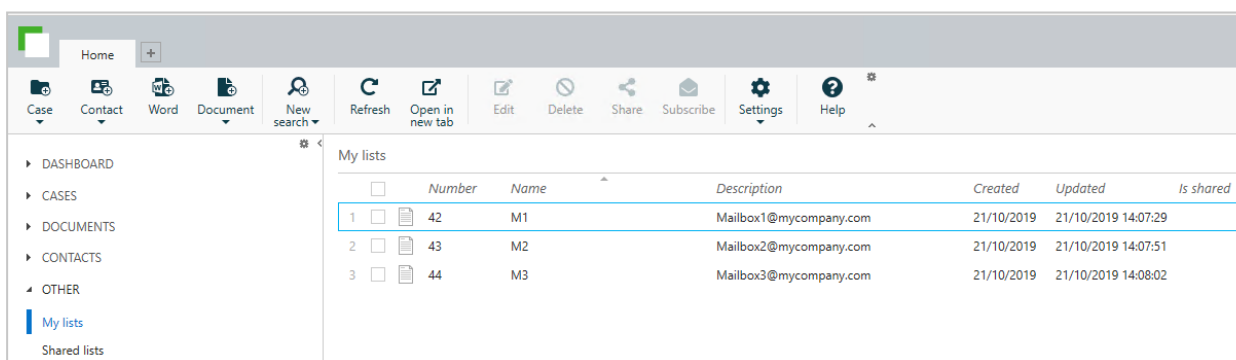

5. Repeat the steps 1-4 for each of the mailboxes that are monitored.

You can now share the saved search list with the relevant users. See [Share a saved search list](#) in the WorkZone Client User Guide.

If you want to check that all monitored mailboxes are shown in the droplist in WorkZone Client, you can create a saved search where the filter of the custom field

is **is empty**. This is useful if you add mailboxes to service workflows, and want to make sure that you have not forgotten to add them as items on the droplist. For example:

WorkZone OData QueryBuilder

Saved Query
ID: 21, Name: TA, Owner: TESTADMIN

Endpoint: Full Strict OData V3 (V3) ▾ Show labels ▾ Links: Client ▾ My Queries Auto performance

Entity: Documents (Records) ▾ Documentation...

Filter: − Monitored mailbox (MBM_Value) ▾ is empty ▾

+

Select: × Id (ID) × User key (UserKey) × Summary (Summary)

Expand: +

Order by: +

V3/Records?\$filter=MBM_Value eq null&\$select=ID,UserKey,Summary

Search (53)
Save Query
Delete Query
Export Query

Process Monitor

The process monitor is a service workflow that can monitor if processes fail. It monitors:


- Failed processes. For example, a process will fail if an actor has been deleted from the Active Directory, or an actor does not have appropriate access rights.
- Unsent smarttask in the service queue. If Microsoft Exchange is not running, smarttask as emails will not be sent.

In each case, an email is sent to the process owner to inform about the process that has failed. The email contains a link to the process in the **Processes** overview and the process ID. The process owner must send the information to the organization's WorkZone administrator for further investigation. The WorkZone administrator should then check the workflow log or the service queue for more information. See [Process logging](#) in the WorkZone Client Operations Guide.

Create a Process monitor service workflow

You create service workflows in WorkZone Configurator. See [Service workflows](#) in the WorkZone Configurator Administrator Guide.

Configure a Process monitoring service workflow in WorkZone Configurator

1. Open WorkZone Configurator.
2. Click **Process > Service workflows**.
3. Point to the **Process monitoring** service workflow that you just created, and click  **Edit parameters** to configure the service workflow.
4. Enter values for the parameters.

Name	Description	Sample values
ExchangeUrl	The URL of the Exchange web service.	http(s)://<host>/EWS/Exchange.asmx.
ExchangeDomain	The domain for the Exchange user.	
ExchangeUser	Login for the Exchange user. This user must have access to the Exchange mailbox. The user must be a WorkZone user and the name must be in upper-case.	The user that you have set up as the smarttask sender during configuration of WorkZone Process.
ExchangePassword	The password for the Exchange user.	
ExchangeMailBox	The email address of the Exchange user mailbox.	
WatchInterval	Defines how often the workflow should check for failed pro-	300 seconds.

Name	Description	Sample values
	cesses.	
DefaultReceiver	The email address of a person who will receive the email in case the process owner does not have an email address.	

Configure a Mailbox Monitor service workflow

The Mailbox Monitor service workflow monitors email activity in one or more mailboxes. The service workflow defines which mailboxes are monitored, and how often the mailboxes are checked for emails. You can create service workflows in WorkZone Configurator. See [Service workflows](#) in the WorkZone Configurator Administrator Guide.


Important: The number of mailboxes that the Mailbox Monitor service workflow can monitor depends on the capacity of the environment. The number of monitored mailboxes and the number of emails that the mailboxes receive will impact the system memory, disk space, and load. Please contact WorkZone support for technical advice if you plan to monitor many mailboxes with a high volume of emails. For example, more than 10 mailboxes and 100 emails per day per mailbox.


Configure a Mailbox Monitor service workflow in WorkZone Configurator

Prerequisites:

- The Exchange user must have the **Delegate** access with **Editor** permission on the inboxes that you want to monitor. See the ExchangeUser parameter. In Outlook, log on to each of the Exchange mailboxes that you want to monitor, and go to **File > Account Settings > Delegate access** and add the Exchange user as a delegate.

- The Exchange user must have publishing editor rights. To verify that the permissions are correct, right-click the inbox and click **Properties > Permission** tab. Verify that the Exchange user has the permission level **Publishing Editor** and that the **Create subfolders** check box is selected.

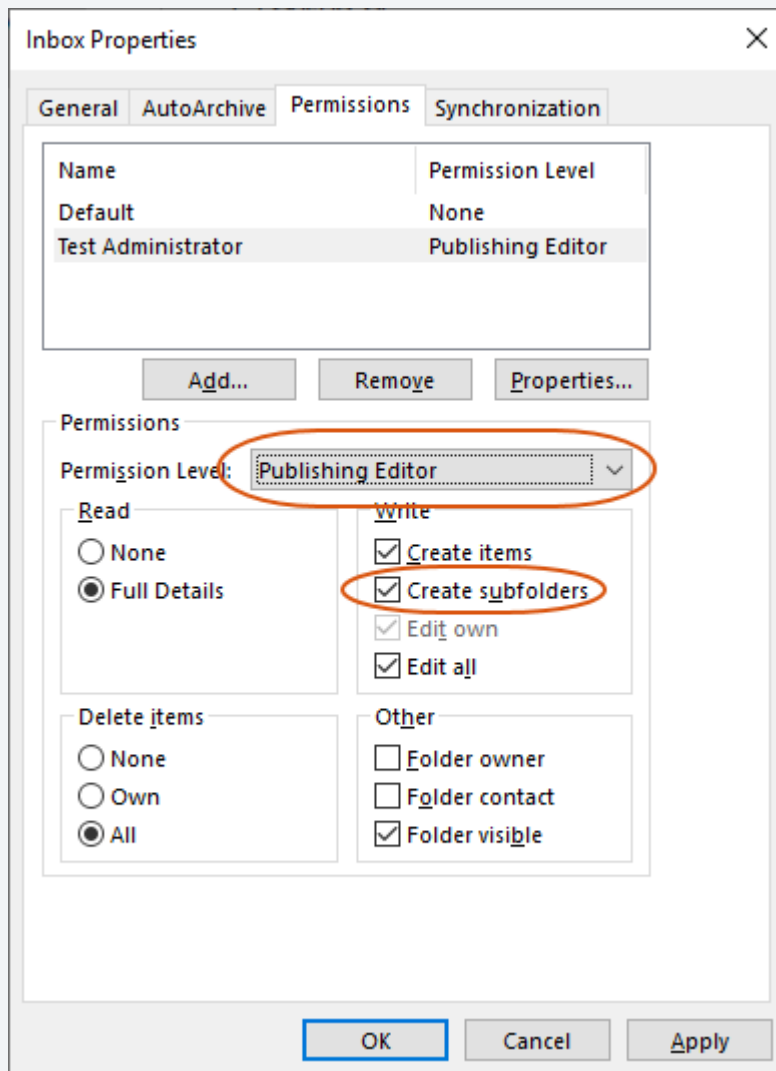

1. Open WorkZone Configurator.
2. Click **Process > Service workflows**.
3. Point to the **Mailbox monitoring** service workflow that you just created, and click  **Edit parameters** to configure the service workflow.
4. Enter values for the parameters.

If you want the service workflow to monitor multiple mailboxes, pay attention to the configuration of the following parameters:

- ExchangeMailBox
- DefaultCase
- FaultedFolderName
- FaultNotificationMailbox
- RecipientAddressProperty

Name	Description	Sample value
ExchangeUrl	The URL of the Exchange web service.	http(s)://<host>/EWS/Exchange.asmx.
ExchangeDomain	The domain of the Exchange user.	<MyCompanyDomain>
ExchangeUser	Login of the Exchange user. This user must have access to the Exchange mailbox.	
ExchangePassword	The password of the Exchange user.	
ExchangeMailBox	The email address of the mailbox to be monitored. If you want to monitor multiple mailboxes, separate the mailbox addresses by commas.	
WatchInterval	The interval in seconds between checking the Exchange mailbox for new emails. A value of 60 - 300 seconds is suitable in most cases.	60
RetryInterval	The interval in seconds	300

Name	Description	Sample value
	<p>between rereading emails that failed to be read. The value must be higher than the watch interval to have effect.</p> <p>This value should be 2 - 5 times larger than the value for the WatchInterval settings.</p>	
RetryCount	<p>The number of times a rereading of the emails is attempted before the emails are abandoned</p> <p>A value of 2 - 5 times is appropriate.</p>	2
ServiceHandleName	<p>The name used by a service to mark an email as handled. The ServiceHandleName must be unique for each service and never be changed for a specific mailbox.</p> <p>Any unique combination of letters and numbers.</p>	
ProcessOwner	<p>The user that will be assigned as process owner.</p> <p>The process owner may also be an organizational unit.</p>	
DefaultCase	The case number of the	Optional value.

Name	Description	Sample value
	<p>default case that is used for incoming emails. If it is not specified, each email will be saved on a new case.</p> <p>If you monitor multiple mailboxes, the default case will be a combined case for all incoming emails in any of the monitored mailboxes.</p>	
DefaultOfficer	The user that will become case handler on the cases that are created. If it is not specified, no case handler is assigned.	Optional value.
DefaultCaseGroup	The case group that will be assigned to new cases. If not specified, SJ-TEMP is used.	Optional value.
AttachmentsIsAppendices	Email attachments are stored as supplementary documents. If it is not enabled, the email attachments will be saved as main documents.	Optional value. If “AttachmentsIsAppendices” is enabled, the document state cannot be ‘AFS’.
NotificationReceivers	The users who will receive a notification when an email is received. If you do not specify recipients, no notifications are sent.	
DocumentState	The document state that the documents will be saved with. If it is not spe-	If “DefaultCaseGroup” is not defined, the document state cannot be ‘AFS’.

Name	Description	Sample value
	<p>cified, the document state will be ARK.</p>	
Authority	<p>The current authority to grant access to the case. Mandatory for corporate access codes.</p>	<p>This value is ignored for a WorkZone standard access codes setup, but it is mandatory for a WorkZone corporate access codes setup.</p>
MailList	<p>The name of the mail list that you want the email documents to be shown on.</p>	<p>Optional value.</p>
MailType	<p>The email document type.</p>	<p>Default value = I.</p>
AttachmentType	<p>The document type of the attachment. Must be a valid value from the AT domain.</p>	<p>Default value = DOK.</p>
SaveSender	<p>The field that the sender's email address is saved to. By default, the email address is saved to the Sent from field. If you do not specify a field, the sender email address will not be saved.</p> <p>You can use a custom field, and in this case, both the sender's email address and name will be saved.</p>	<p>Optional value.</p>
FaultedFolderName	<p>Name of the Outlook folder used for emails that cannot be saved automatically in WorkZone due to issues in the emails or their attach-</p>	

Name	Description	Sample value
	<p>ments.</p> <p>The folder will be created as a subfolder of the monitored mailbox. The folder will only be created if there are faulty emails.</p> <p>If you monitor multiple mailboxes, a folder with this name will be created as a subfolder of each of the monitored mailboxes.</p>	
FaultNotificationMailbox	<p>The email address of a user who will receive an email notification when an email is not saved automatically.</p> <p>If you monitor multiple mailboxes, the email address that you specify will receive notifications about faulty emails from all monitored mailboxes.</p>	
RecipientAddressProperty	<p>If you monitor several mailboxes with one service workflow, you may want to add a field on the document detail page for the email document that shows to which mailbox the document was sent. If you have set up such a field, add the code for the field here, and it will be pop-</p>	

Name	Description	Sample value
	<p>ulated with the email address.</p> <p>See Optional configurations in WorkZone Client.</p>	

If you have configured the Mailbox Monitor service workflow to monitor multiple mailboxes, you can do additional configuration in WorkZone Client, which will make it easier for users to monitor incoming documents per mailbox and work with the documents. See Optional configurations in WorkZone Client.

Case monitor

The Case monitoring service workflow can monitor newly created cases and automatically start a case activity or a workflow without mandatory arguments. The case activity or workflow starts if a case fulfills a predefined rule set. The rule set determines which cases to start a case activity or a workflow on and optionally a duration. Rule sets are based on saved searches that you create using WorkZone Client.

If you want a case monitoring service workflow to start a case activity list that contain SendSmartPost activities, the WorkZone PDF Engine must be installed both on the web server and the agent server. It is not sufficient to install it on the web server only.

The reason for the agent server installation is that when a case monitor service workflow starts a case activity list, the case activity list is started by the agent server that runs the service workflow. If the case activity list contains **SendSmartPost** activities, the SmartPost processes will also be started on the agent server. Because SmartPost processes require the PDF Engine to generate PDF documents, it must be installed on the same server as the case monitor service workflow.

You create and configure Case monitoring service workflows and rule sets in WorkZone Configurator.

You must complete the following steps to set up a Case monitoring service workflow:

1. Create, save, and share saved searches.
2. Create a rule set and one or more rules to add to the rule set.
3. Create a Case monitoring service workflow.

In this release, you can only start one case activity list or one workflow per created case.



Creating rule sets

Rule sets define on which new cases, a case activity or a workflow will start. A rule set consists of:

- Name and description of the rule set and optionally, a start and an end date.
- Rules that are based on saved searches.

Create rule sets

One or more saved and shared searches. The searches must be shared with the organization. You create, save, share searches using WorkZone Client. See [Save and reuse search lists](#) in the WorkZone Client User Guide.

1. Open WorkZone Configurator.
2. Go to **Process > Rule sets**.
3. Click  **Create rule set**.
4. Enter a name and a description in the **Create rule set** dialog box, and then click **Save**.
5. Click  **Create** to create a rule that will be included in the rule set. For each rule that you add, you need to specify the following parameters:

Name	Description
------	-------------

Search	Select a saved search that you want to use to find cases to start a case activity or a workflow on.
---------------	---

Name	Description
Priority	Enter priority, if you have more than one rule in the rule set. The rules will be applied according to the order specified by the priority.
Process	Select which process you want to start. In this release, you can only select case activities or workflows without mandatory parameters.
Duration	<p>Enter the duration of the case activity. The duration is used to calculate the deadline of the case activity. The deadline will be calculated as the time when a case fulfills the rule + the duration.</p> <p>You can use the following relative date and time stamps to specify the duration:</p> <ul style="list-style-type: none"> d days/dage t timer h hours

Examples:

Duration	The process deadline will be...
+5d	5 days after a case fulfills the rule.
+2h	2 hours after a case fulfills the rule.
+5d2h	5 days and 2 hours after a case fulfills the rule. Note that you must write the number of days followed by the number of hours in this order.

If you do not specify a duration, the case activity will be started without a deadline.

If the duration is invalid, for example +0d, which is now, the case activity is stopped and an error is written in the Event Log.

- Switch to **Enabled** to start using the rule.

Important: If you make changes to a rule set, which is already used by a case monitoring service workflow, you must disable the service workflow, wait a couple of minutes, and then enable it again to apply the change. You can check the Event Log to make sure that the service workflow is actually stopped before you enable it again.

Configure a case monitoring service workflow


The Case monitoring service workflow can monitor when new cases are created and then automatically start a case activity or a customized workflow.

Create a case monitor service workflow

You can create a Case monitoring service workflow in WorkZone Configurator. See [Service workflows](#) in the WorkZone Configurator Administrator Guide.

Configure a Case monitoring service workflow

Prerequisites: You must create one or more rule sets that define on which cases, a case activity or a workflow will start. See [Creating rule sets](#).

1. Open WorkZone Configurator.
2. Go to **Process > Service workflows**.
3. Point to the **Case monitoring** service workflow that you just created, and click  **Edit parameters** to configure the service workflow.
4. Enter values for the parameters.
5. Click **Save**.

Name	Description	Sample value
WatchInterval	The interval in seconds between checking for new cases. A value of 60 – 300 seconds is suitable in most cases.	60

Name	Description	Sample value
ProcessOwner	The name of the contact that will be assigned as process owner of the case activity or workflow that will be started.	
RuleSet	The name of the set of rules that determines on which cases a case activity will start. If the rules are met, the case activity or workflow starts. See Creating rule sets.	

6. Click  **Edit** and turn on **Enabled** to start the service workflow.

Interact connector

KMD WorkZone Interact is a tool that organizations can use to design, create, and maintain digital forms. For more information about WorkZone Interact, please see [KMD WorkZone Interact](#).

The Interact connector is a service workflow that connects to WorkZone Interact and monitors if data is submitted from Interact forms. If this is case, the workflow retrieves the data and performs actions in WorkZone. For an overview of the actions that the Interact connector service workflow supports, see WorkZone actions.

The Interact connector service workflow retrieves data from Interact at an interval that you specify when you configure the service workflow in WorkZone Configurator.

Getting started

Before you can start using the Interact integration, you need to:

- Acquire and install the Interact certificate.
- Create and configure an Interact connector service workflow per form that you want WorkZone to retrieve data from.

Acquire and install the Interact certificate

Before you can start using the Interact connector service workflow, you need to acquire the functional certificate that was used for the Interact installation including the private key. The

steps in the certificate process are:

The steps in the certificate process are:

1. Acquire a certificate
2. Import the certificate to the certificate store
3. Add the private key of the IIS user to the certificate
4. Apply the certificate to the Interact service workflow

Acquire a certificate

Contact the organization's certificate administrator to get the Interact certificate including the private key that can be used for Interact.


Import the certificate to the certificate store

You need to import the certificate to the certificate store on the WorkZone Process server that runs the Interact service workflow using the **Windows Certificate Import Wizard**. If you have both a web server and agent server, you must install the certificate on both.

1. Double-click the certificate to start the **Certificate Import Wizard**.
2. On the Welcome page, click **Local Machine**, and then click **Next**.



3. Click Next until you reach the **Certificate Store** page, and then select **Automatically select the certificate store based on the type of certificate** option.

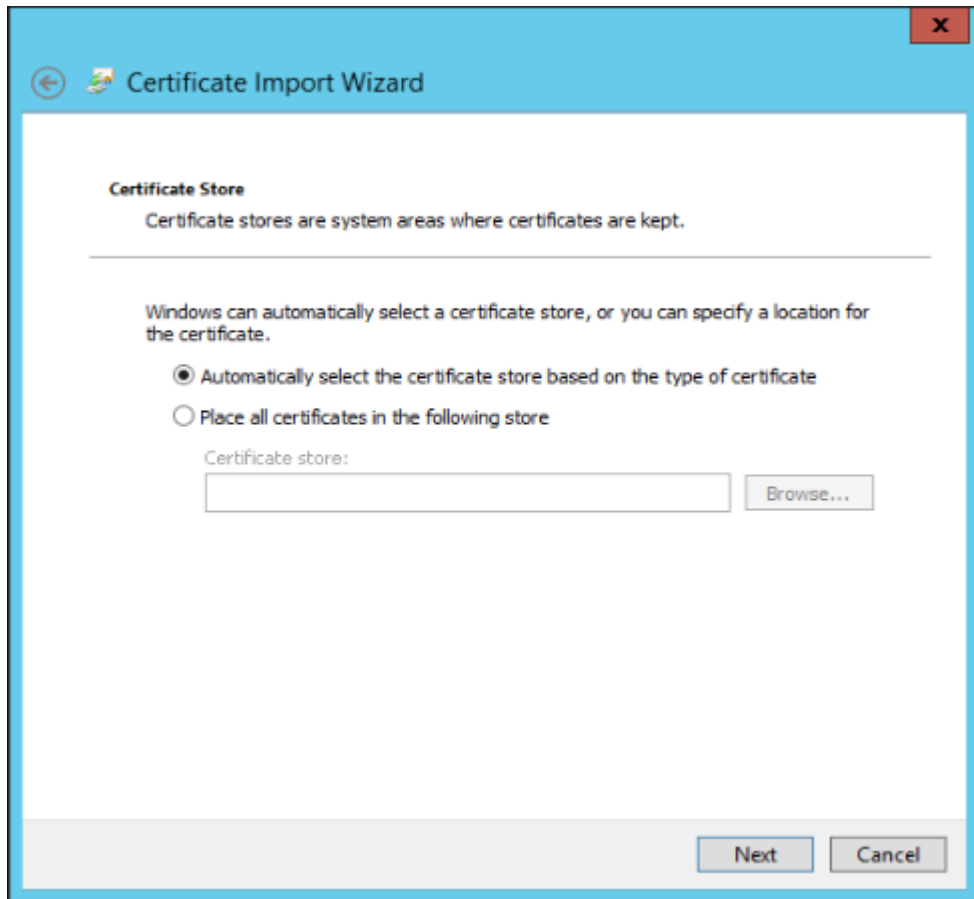

4. Complete the wizard.

Add the private key of the IIS user to the certificate

You must add the private key of the IIS user that runs the WzpSvc app pool, typically that is **IIS APPPOOL\WzpSvc**, to the Interact certificate. You do this in the **Certificate Manager** in the same way as for SmartPost. See [Apply certificates to SmartPost](#) .

Apply the certificate to the Interact service workflow

You register the Interact certificate in WorkZone Configurator.

1. In WorkZone Configurator, go to **Process > Service workflows**.
2. Select the a service workflow of the type **Interact connector**.
3. Enter the thumbprint of the certificate in the **CertificateThumbPrint** field.


See [Service workflows](#) in the WorkZone Configurator Administrator Guide.

Create and configure an Interact connector service workflow

You can create an Interact service workflow in WorkZone Configurator. See [Service workflows](#) in the WorkZone Configurator Administrator Guide.

You must create an Interact connector service workflow per form that you want WorkZone to fetch data from.

Configure an Interact connector service workflow in WorkZone Configurator


1. Open WorkZone Configurator.
2. Go to **Process > Service workflows**.
3. Point to the **Interact connector** service workflow that you have created, and click  **Edit parameters** to configure the service workflow.
4. Enter values for the parameters, and click **Save**.

Name	Description	Sample value
WatchInterval	The interval in seconds between checking for new data from Interact. A value of 60 – 300 seconds is suitable in most cases.	60
Url	Enter the URL for the Interact service. Depending on whether the configuration is made for test or production, enter one of the two URLs.	Test: https://-preprod-interact-api.mycompany.dk Production: https://interact-api-mycompany.dk
ClientId	The organization's Interact ID, which is defined by ACOS.	mycompany-workzone
CertificateThumbprint	Enter the thumbprint that identifies the Interact cer-	

Name	Description	Sample value
	tificate.	
FormIds	<p>The IDs of the Interact form that the Interact connector service workflow fetches data from. You can see the form ID in the Interact client. You can select multiple forms by listing the form IDs separated by a comma. If you do not specify a form ID, data from all forms will be fetched.</p>	800636
ExecutingUser	<p>Select the user that will be used to create and update cases, documents, and contacts in WorkZone.</p> <p>The user you select as the executing user must have sufficient permissions to perform the actions on cases, documents, and contacts that the Interact forms are designed to do. The executing user's permissions must always be aligned with the functionality of the Interact forms. If you introduce new forms or change existing forms, you should always verify that the executing user's permissions are still valid.</p>	Security group

Name	Description	Sample value
	<p>Interact requires Create, Read, and Update permissions. By default, security group 6 includes these permissions but your organization may have defined the groups differently. For information about security groups, see Apply security groups to users in the WorkZone Installation Guide.</p> <p>Access codes</p> <p>The selected user must also have the necessary access codes to be able to perform create and update actions on cases, documents, and contacts. The required access codes depend on how your organization has set up WorkZone. If you want Interact to be able to create and update cases, documents, and contacts that are protected with certain access codes, the executing user needs to have the same access codes. For example, if you want to update a case with the access code HR, the executing user will need to</p>	

Name	Description	Sample value
	<p>have the HR access code applied as well.</p> <p>If you run on a corporate access environment, the selected user determines which organizational unit and access code will be applied to a case that is created.</p>	

5. Point to the **Interact connector** service workflow, and click **Edit** .
6. Turn on **Enabled** to start using the service workflow.

Status

You can check the status of processed Interact forms in the Workflow log in the same way as any other service workflow, see [Monitoring WorkZone Process](#) in the WorkZone Operations Guide. In addition, you can see the status in the Interact app. In Interact, go to **Submitted dialogues**. The table below describes what the Interact status means in WorkZone context.

Interact status	What does it mean in WorkZone?
Delivered	The form has been submitted for handling in WorkZone.
Temporary blocked	An error has occurred when creating an error case in WorkZone. See Error cases. If a submission has this status, it means that some WorkZone setup is missing or wrong, for example there is no access to OData or the default case group that are automatically assigned to error cases is no longer valid.
Imported	The submission was successful and has been processed in WorkZone or an error case has been created in WorkZone.

WorkZone actions

The table below lists the actions that the Interact connector service workflow can perform in WorkZone based on data that is retrieved from Interact forms. The Interact connector service workflow supports:

- Creating new cases
- Updating existing cases

In both scenarios, information from the Interact form is inserted into the corresponding fields on the case. If documents are attached to the Interact form, they are added to the case. In addition, two system generated documents are always added to the case:

- A PDF document—A user-friendly representation of what the user submitted through the Interact form.
- An XML document—This is the corresponding technical document, which contains the same content and additional meta data about the submitted data. This document is added as a supplementary document to the PDF document.

If you have mapped meta data on documents, this mapping will also apply to the system generated PDF and XML documents. If you have not mapped any meta data to documents, the default values will be used. The default values for the two documents are the document type **DOK, Document** and the document state **ARK, Archive**. If the Interact submission contains invalid mapping and it results in creation of an error case, the PDF and XML documents will be added to the error case with default values and not the values from the mapping. See View Interact connector errors.

The table below provides an overview of the actions that the Interact connector service workflow supports.

Action	What happens?
Insert data from fields	Data from the Interact form is inserted into the corresponding fields on the case, attached documents, and to new contacts that are added. This action applies to both standard and custom fields on cases, but only standard fields are supported on documents and contacts.
Add documents	Documents that are attached to the Interact form are added to the case. The documents are created with the document title that the user has specified in

Action	What happens?
	<p>the form. The title will be applied to all attached documents.</p> <p>If the title is not specified, the file names of the attached documents will be used as document titles.</p>
Add a new contact	<p>If the contact does not exist in WorkZone, a new contact is created and assigned as a party on the case. The party will be assigned the role Case party (Sagspart) by default. It is not possible to change the configuration of the default role. The contact is created based on the type that the user has specified in the Interact form, for example persons with CPR or companies with CVR.</p> <p>Note that if you see the following error message:</p> <p><i>"Failed to construct OData Entities. Check OData property names. (Custom label Sagspart with the type equal to SP does not exist in the database.)"</i></p> <p>It means that the Case party role that was assigned has an end date. You must remove the end date to solve the issue.</p>
Add a contact as a party on a case	<p>If a contact already exists in WorkZone, the contact is added as a party on the case. Existing contacts are identified on the basis of the NameCode and NameType fields. This means that these fields must be mandatory in the Interact form.</p> <p>In this release, parties cannot be removed from the case.</p>
Update an existing case	<p>If a user submits an Interact form that contains a file key (FileKey or FileNo) that exists in WorkZone, the following happens:</p> <ul style="list-style-type: none"> • If new documents are submitted with the Interact form, they are added to the case. • If new contacts are submitted with the Interact form, they are added as new parties on the case. • New XML and PDF documents are added. • A new Interact reference ID is added on the Information tab on the case in WorkZone Client. The reference ID refers to the a specific submitted dialogue in Interact.

Mapping fields in Interact forms to data

This section provides basic introductions on how to map fields in Interact forms to WorkZone data. For more information about creating Interact forms, refer to the Interact documentation.

To map data in Interact, you need to know the WorkZone OData entity names and field IDs. If you are not familiar with the WorkZone data model, you can use WorkZone QueryBuilder to help you find the entity names and IDs.

Supported entities:

- Files (Cases/Sager)
- Records (Documents/Dokumenter)
- Contact (Contacts/Kontakter)
- AddressMains (address_main/address_main)

Identifying OData entity names and IDs using WorkZone QueryBuilder

You can use WorkZone QueryBuilder to find the IDs that you need to know to be able to map fields in Interact forms to WorkZone data. You can either click the **Documentation** button in WorkZone QueryBuilder to get an overview of fields by entity or you can look up entities and fields using WorkZone QueryBuilder.

Look up entities and fields

1. Open WorkZone QueryBuilder.
2. Select an entity. You can search for the label, for example **Cases** or **Sager** depending on the language setup. If you search for the **Cases** label, you will see the OData entity name in brackets **Cases (Files)**.

WorkZone OData QueryBuilder

Endpoint: Full Strict OData V3 (V3) ▾ Show labels ▾ Links: Client ▾ My

Entity: -- select -- ▾ Documentation...

× Q

- Cases (Files)**
- Cases (Files<FileSJDashAGENDA>)
- Cases (OpenSearchFiles)
- Cases/records/contacts (RegisterTexts)

3. Select fields. You can search for the labels of the fields, for example **Title** or **Titel**, **case group** or **sagsgr.**, **Case handler** or **Sagsbeh.**, and so on. You will see the OData field ID in brackets. In this example, **Title (Title)**, **Case value (FileClass_Value)**, and **Case handler (Officer_Value)**. The name in the bracket is the ID that you need for the mapping.

WorkZone OData QueryBuilder

Endpoint: Full Strict OData V3 (V3) ▾ Show labels ▾ Links: Client ▾ My Queries

Entity: **Cases (Files)** ▾ Documentation...

Filter: +

Select: × Title (Title) × Case group (FileGroup_Value) case hand

- Case handler (Officer_Value)**

Expand: + Case handler (Officer_Summary)

Notes:

- You can only use fields of the type `_Value`, not `_Summary`.
- Labels in your organization may be named differently.

Some fields are mandatory and some fields have dependencies on each other. See Mandatory fields and dependencies.

Mapping in Interact

Set up OData access

To access OData from the Interact server, follow these steps:

1. In the hosts file (on the interact server), add an entry with the IP address of the WorkZone server mapped to the host name of the WorkZone server.
2. In Interact, click **Settings > Integration**. In the OData section, use the host name in the **URL** field.
3. To verify access to OData. open a browser on the Interact server and paste the URL of the WorkZone server, for example `https://[host]/odata`. If you receive an OData XML response, the access is provided.


Map fields

1. Open the Interact form.
2. Click the **DATA TRANSFER** tab.
3. On the Dynamic tab, select the **Activate delivery** check box.
4. Select the WorkZone entity you want to use, for example **Cases (Files)**, and click the **+** button.

The list is sorted by the OData field IDs in the brackets.

5. Find the ID of the field you want to map in the list, for example **Class (FileClass_Value)**.
6. Click in the field next to the ID that you want to map. In this example **Class (FileClass_Value)**.
7. Press the Ctrl key and click in the field in the form that you want to map the

ID to. In this example the **Case group** field.

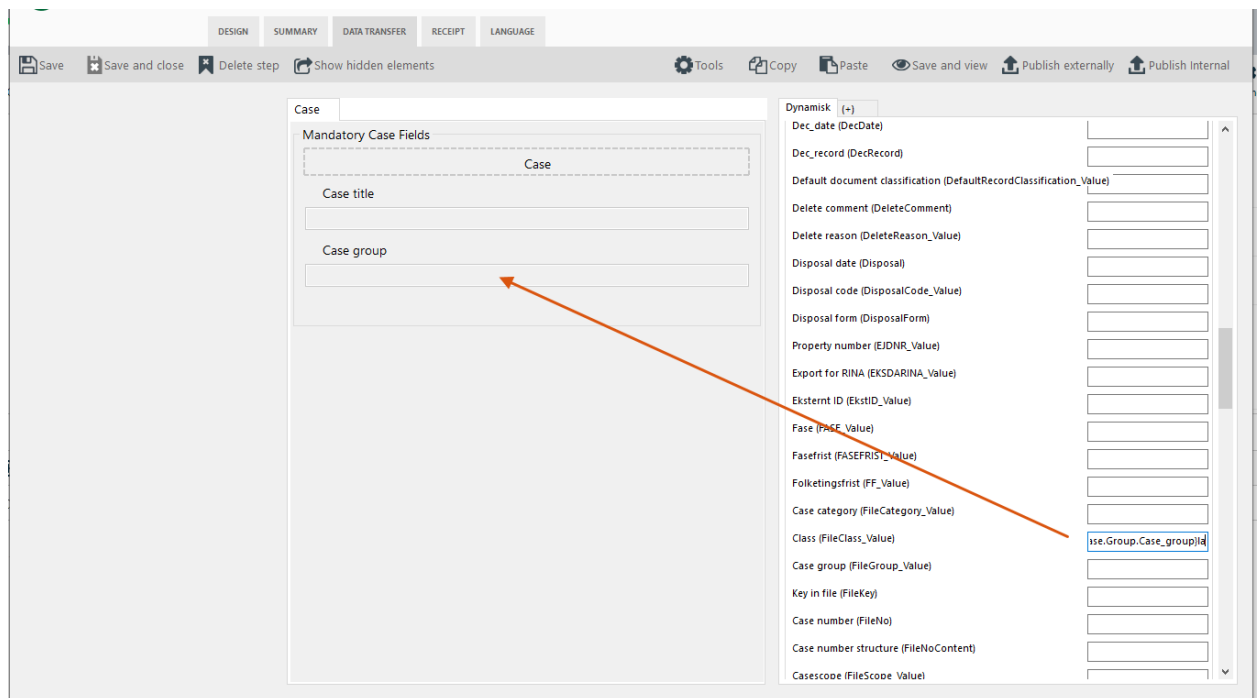

Mapping examples

Set a contact as primary party on a case

To set an existing contact as the primary party on a case at case creation, you must map the following fields in Interact:

- **NameCode**
- **NameType_Value**, for example 'M' for Employee.
- **NCustomLabel_Value**. Optional, if you want to specify the role, for example 'Sagspart'.

Mandatory fields and dependencies

Some fields are mandatory and some fields have dependencies to each other. Below you will find an overview of standard entities, mandatory fields, and dependencies between fields. If a field is mandatory, it must have a value. You can either specify a default hard-coded value in

Interact Designer or you can make the field mandatory in the Interact form for end users to fill in.

Important: If mandatory fields are left empty, the Interact Connector service workflow will fail to retrieve the data and perform actions in WorkZone.

Action: CREATE

Entity ID: Files

The Files entity defines meta data on cases.

Entity ID	Entity label (Da)	Entity label (En)	Mandatory field IDs	Field labels (Da)	Field labels (En)	Fallback value
Files	Sager	Cases	Title	Titel	Title	-
			FileClass_ Value	Sagsgrp.	Class	-

Guidelines:

- Cases can be created separately without any other entities (such as documents or contacts). In this case, do not map fields of other entities in the form.

Entity ID: Records

The Records entity defines meta data on documents.

Entity ID	Entity label (Da)	Entity label (En)	Mandatory field IDs	Field labels (Da)	Field labels (En)	Fallback value
Records	Dokumenter	Documents	Title	Titel	Title	Attachment file name
			State_Value	Tilstand	State	
			RecordType_	Dokumenttype	Document	

Entity ID	Entity label (Da)	Entity label (En)	Mandatory field IDs	Field labels (Da)	Field labels (En)	Fallback value
			Value		type	

Guidelines:

- Documents can be created only in relation with a specific case. If the form lacks mapping for mandatory **Files** fields, the document creation will fail.
- The form must not contain mandatory mapped **Contacts** or **AddressMains** fields that are not filled in either with a hard-coded value or by the user when filling in the form. Mandatory fields cannot be empty.

Entity ID: Contacts

The Contacts entity contains meta data on contacts.

Entity ID	Entity label (Da)	Entity label (En)	Mandatory field IDs	Field labels (Da)	Field labels (En)	Fallback value
Contacts	Adressater	Contacts	NameType_ value	Adressattype	Contact type	-
			NameCode	Adressatkode	Contact code	-

Guidelines:

- Contacts can be created only in relation to a specific case. If the form lacks mapping for mandatory **Files** fields, the contact creation will fail.
- The form must not contain mapped **AddressMains** fields that are not filled in either with a hard-coded value or by the user when filling in the form. Mandatory fields cannot be empty.
- Filling only mandatory fields will create a contact without a name and with an empty main address field.

NameCode is mandatory for some contact types, for example:

- C (Person with CPR)
- J (Company with CVR)

And not mandatory for some other types, for example P (Person without CPR) and F (Companies without CVR).

Entity ID: AddressMains

The AddressMains entity contains contacts' main addresses.

Entity ID	Entity label (Da)	Entity label (En)	Mandatory field IDs	Field labels (Da)	Field labels (En)	Fallback value
AddressMains	Address_main	Address_main	AddressType_Value	Adresstype	Address type	-

Guidelines:

- Main address can be created only in relation to a specific contact. If the form lacks mapping of mandatory **Contact** fields, the main address creation will fail.
- Filling only the mandatory field will create a main address without an actual address.
- AddressType_Value should always be HA - main address.

Mapping of additional addresses is supported (entity ID: Addresses) but for the mapping to work you must make sure to map the main address first with the value HA. Additional addresses must not be of the type HA.

Action: UPDATE existing case

Entity ID: Files

Entity ID	Entity label (Da)	Entity label (En)	Mandatory field IDs	Field labels (Da)	Field labels (En)	Fallback value
Files		Cases	FileKey or FileNo	Surrogatnøgle i SAG.	Key in file	-

Guidelines:

- All case fields sent in such a form will update values on the case that already exists in the database with the mentioned FileKey or FileNo.

Entity ID: Records

Entity ID	Entity label (Da)	Entity label (En)	Mandatory field IDs	Field labels (Da)	Field labels (En)	Fallback value
Records	Dokumenter	Documents	Title	Titel	Title	Attachment file name
			State_Value	Tilstand	State	ARK
			RecordType_Value	Dokumenttype	Document type	DOK

Guidelines

- No mandatory **Records** fields are required to be mapped. Mandatory values fall back to default values.
- Documents will be created on the case that already exists in the database with the mentioned FileKey or FileNo.

Entity ID: Contacts

Entity ID	Entity label (Da)	Entity label (En)	Mandatory field IDs	Field labels (Da)	Field labels (En)	Fallback value
Contacts	Adressater	Contacts	NameType_value	Adressattype	Contact type	-
			NameCode	Adressatkode	Contact code	-

Guidelines:

- If a contact with the combination of **NameType_value + NameCode** is found in the database, its main address will be linked to the case that already exists in the databases with the mentioned FileKey or FileNo. No values Contact/adressMains will be changed (only linked to case).

- If a contact with the combination of **NameType_value + NameCode** is NOT found in the database, an attempt of creation of a new contact will be performed (with all values filled in for Contact/addressMains).

Entity ID: AddressMains

Entity ID	Entity label (Da)	Entity label (En)	Mandatory field IDs	Field labels (Da)	Field labels (En)	Fallback value
AddressMains	Address_main	Address_main	AddressType_Value	Adresstype	Address type	-

Guidelines:

- Do not add AddressMains mappings if you are not expecting it to be filled in (otherwise it will fail the dialogue submission).
- AddressType_Value should always be HA - main address.

View Interact connector errors

If retrieval of data from an Interact form fails, for example if fields in a form are mapped incorrectly in Interact, mandatory fields have not been filled in by the user, or fields cannot be found, a case is created with the error text shown in the **Case text** field. An error will also be returned to the Interact app.

Error cases

The cases that contain error messages are created with the title [INTERACT ERROR] and with the case group that is configured as the default case group in WorkZone Configurator. By default, it is SJ-TEMP but your organization may be using another case group.

The case contains the following information that can assist you in identifying the form in question and fixing the error:

- An error message in the **Case text** field.
- The PDF document with the content of the submitted form.
- The name of the form that caused the error in file name of the PDF document.
- The Interact reference ID on the **Information** tab.

For a better overview, you can create a search list in WorkZone Client that shows the Interact error cases.

Create a list of error cases

1. Search for cases with the title **[INTERACT ERROR]** in the **Title** field and the information type **Interact Ref. ID** in the **Information** field.
2. Save the list.
3. Add it to the navigation pane on the **Home** tab in the WorkZone Client. You can see the list under **My lists** in the **Available lists** pane. See [Manage saved search lists](#) in the WorkZone Client User Guide.

In addition to checking the error cases, you can check the workflow log to find out why the Interact service workflow failed. See [Investigate failed processes in the workflow log](#) in the WorkZone Operations Guide.

You can set up a Process monitor service workflow to monitor whether processes fail. If an Interact service workflow fails, the process owner will be notified by an email. In this case, the process owner is the user you have specified in the **InteractUser** parameter when you configured the Interact service workflow. See [Process Monitor and Create and configure an Interact connector service workflow](#)

Troubleshooting Interact connector

Click an issue below to see the solution or workaround.

"Feltet 'Nøgle i sag' (db name = file_key) validerer mod register 'file', men system nøglen 149067 findes ikke i registeret."

Message in Danish: "Feltet 'Nøgle i sag' (db name = file_key) validerer mod register 'file', men system nøglen 149067 findes ikke i registeret."

If you get this message in the workflow log (WzpWorkflowLogs), it is probably because the user that is configured as the Interact executing user does not have an access code that allows creating cases in the selected case group. To solve this issue, assign the same access code that is configured for the case group to the executing user.

See **ExecutingUser** parameter.

Configuring SmartPost

The SmartPost package is an add-on package that supports sending messages from authorities, companies, and organizations to case parties in WorkZone as well as receiving replies to messages from case parties in an authority's or company's digital mailbox.

SmartPost prerequisites	94
Configure digital mail	102
Configure remote print	104
Acquire and install the e-Boks Certificate	106
Apply certificates to SmartPost	112
Configure SmartPost	116
Configure CPR and CVR	123
Configure SmartPost for sending messages	127
Configure SmartPost for receiving messages	173
Dispatcher error handling	181

SmartPost prerequisites

Before you start setting up SmartPost, there are some prerequisites that need to be in place.

e-Boks and Strålfors certificates

Local Registration Authority (LRA) - NemID administrator

The NemID administrator is an employee who is authorized to create access to the service providers' administration portals (e-Boks Administration Portal and Strålfors Connect), create and issue employee certificates to other employees, and assign different roles to the employees such as administrator, super administrators, and so on. The NemID administrator is often an employee of the IT department in an organization.

The NemID administrator needs to have an LRA certificate, which is a special type of certificate that allows the NemID administrator to manage and issue employee certificates.

Point out an administrator and issue an employee certificate

The LRA administrator assigns an employee as administrator (or super administrator) and issues an employee certificate to this employee. This employee will then be authorized to create dispatch and retrieval systems and to manage the organization's e-Boks and Strålfors configurations.

The typical process is as follows:

1. The employee is requested to order an employee certificate at NemID. See <https://www.medarbejdersignatur.dk/>.
2. The LRA administrator receives an approval message from NemID and approves the NemID.
3. The employee receives a message from NemID with instructions on how to download the certificate.
4. The LRA administrator assigns the employee as administrator or super administrator.

Acquire and use of the certificate (funktionscertifikat)

The LRA administrator needs to acquire a certificate (funktionscertifikat). The SmartPost process will use the certificate as electronic identification in relation to the service providers. The LRA administrator hands over the certificate to the administrator, who will then use the certificate to configure the systems.

The certificate allows a system A to identify itself towards another system B, where system A submits a service.

The certificate can be used in two different ways:

- As dispatcher

This is system A. System A identifies itself towards another system B. System A will use the certificate to encrypt the communication with the use of a private key.

- As recipient

This is system B. System B has received the certificate in a form where it only contains a public key that system B can use to decrypt the communication from system A. If the communication does not derive from system A but from a third unknown

system C that pretends to be system A, it will be revealed during the decryption. Only the system with the certificate with the private key can make an encryption that can be decrypted with the public key that system A previously handed over to system B.

The certificate must be stored in the certificate store on the server that runs the SmartPost process.

See Acquire and install the e-Boks Certificate for instructions on the certificate process.

Digital mail Prerequisites

Before you start the installation of the SmartPost process, you need to complete some configuration tasks for SmartPost to be able to communicate with e-Boks.

e-Boks opens for the organization's IP addresses

A prerequisite for SmartPost to be able to communicate with e-Boks through the REST interface is that e-Boks knows the IP addresses of the systems that use the services of e-Boks. These are typically registered at Digitaliseringsstyrelsen (Danish Agency for Digitisation) from where e-Boks usually gets the information.

Important: If the information about e-Boks addresses is not up-to-date, SmartPost will not be able to contact the services of e-Boks.

The IP address is the IP address(es) that is known from the WAN (typically the Internet).

From the organization's network, you can determine the IP address by using the website: <http://www.myip.dk>.

Agreement on provision of NemID services (tilslutningsaftale)

The LRA administrator makes an agreement with e-Boks. See instructions [Tilslutning til Digital Post Administrationsportalen](#) from Digitaliseringsstyrelsen.

The agreement must be completed before the configuration of e-Boks can start.

Retrieval system

This section describes the configuration tasks in connection with setting up a retrieval system in the e-Boks administration portal. The retrieval system allows the SmartPost process to retrieve messages from a mailbox in e-Boks. SmartPost retrieves the messages, such as replies from citizens and organizations to messages in e-Boks and unsolicited messages, and saves them automatically in WorkZone.

Create a retrieval system

Before you start this process, make sure that the organization's IP address is known by e-Boks and that an agreement has been made so that the REST service and the e-Boks administration portal are available. You can verify IP address and the agreement are in place by logging into the e-Boks administration portal using this link: <http://ekstranet.e-boks.dk/>. If clicking the link results in a page with a text saying "Kun adgang for myndigheder" (Only accessible for authorities), the organization is either not an authority, or the agreement has not yet been concluded.

See e-Boks opens for the organization's IP addresses and Agreement on provision of NemID services (tilslutningsaftale).

The customer needs to create a retrieval system at e-Boks. This can be done via e-Boks administration portal (<http://ekstranet.e-boks.dk/>).

The table below describes the values that must be applied to the retrieval system.

Value name	Value	Description
Name	Suggestion: "KMD SmartPost Retrieval"	The name by which the retrieval system can be recognized.
EAN no.	Customer specific	The EAN number of the authority.
Delivery type	Pull	Specifies whether e-Boks needs to "push" messages into the customer's system, or whether SmartPost needs to request e-Boks's service in order to retrieve the messages (pull). SmartPost only uses pull.

Value name	Value	Description
API Version	v1	Currently, SmartPost only supports v1.
Certificate	Customer specific	The certificate to e-Boks is uploaded here.
Name of contact person	Customer specific	The name of the person at the customer's business who e-Boks must be able to contact in connection with questions and handover of commercial information. This will typically be a manager in the customer's organization.
Email address of contact person	Customer specific	The email address on which the contact person can be contacted.
Phone number of contact person	Customer specific	The phone number on which the contact person can be contacted.

When the values have been entered, and the retrieval system is created, e-Boks automatically assigns an ID to the retrieval system. This ID must be used in connection with the configuration of SmartPost so that SmartPost knows which retrieval system to use.

See Configure SmartPost for receiving messages.

Create mailboxes

The organization needs to create at least one mailbox at e-Boks in which messages from citizens or an organization can be gathered, before they are collected by the SmartPost retrieval service. Subsequently, the mailbox needs to be connected to the Retrieval system.


Depending on the size of the organization and how it is organized, the organization can decide whether more than one mailbox needs to be configured. As SmartPost applies to a retrieval system and not to a specific mailbox, the customer can decide the number of mailboxes independently of SmartPost. In connection with the configuration of individual

mailboxes in e-Boks, the customer can choose if the mailbox should be emptied by a retrieval system and, in that case, by which one. The diagram below shows an example of mailboxes and retrieval systems that are configured in e-boks and SmartPost.

Mailbox A is connected to retrieval system A. If necessary, an alternative system can retrieve messages from Retrieval system A.

Mailbox B and Mailbox C are connected to Retrieval system B. As SmartPost has been configured to retrieve messages from Retrieval system B, Mailbox B and Mailbox C are emptied by SmartPost.

Mailbox D is not connected to any retrieval system. As a result, SmartPost (or an alternative system) cannot retrieve messages from this mailbox via the REST interface.

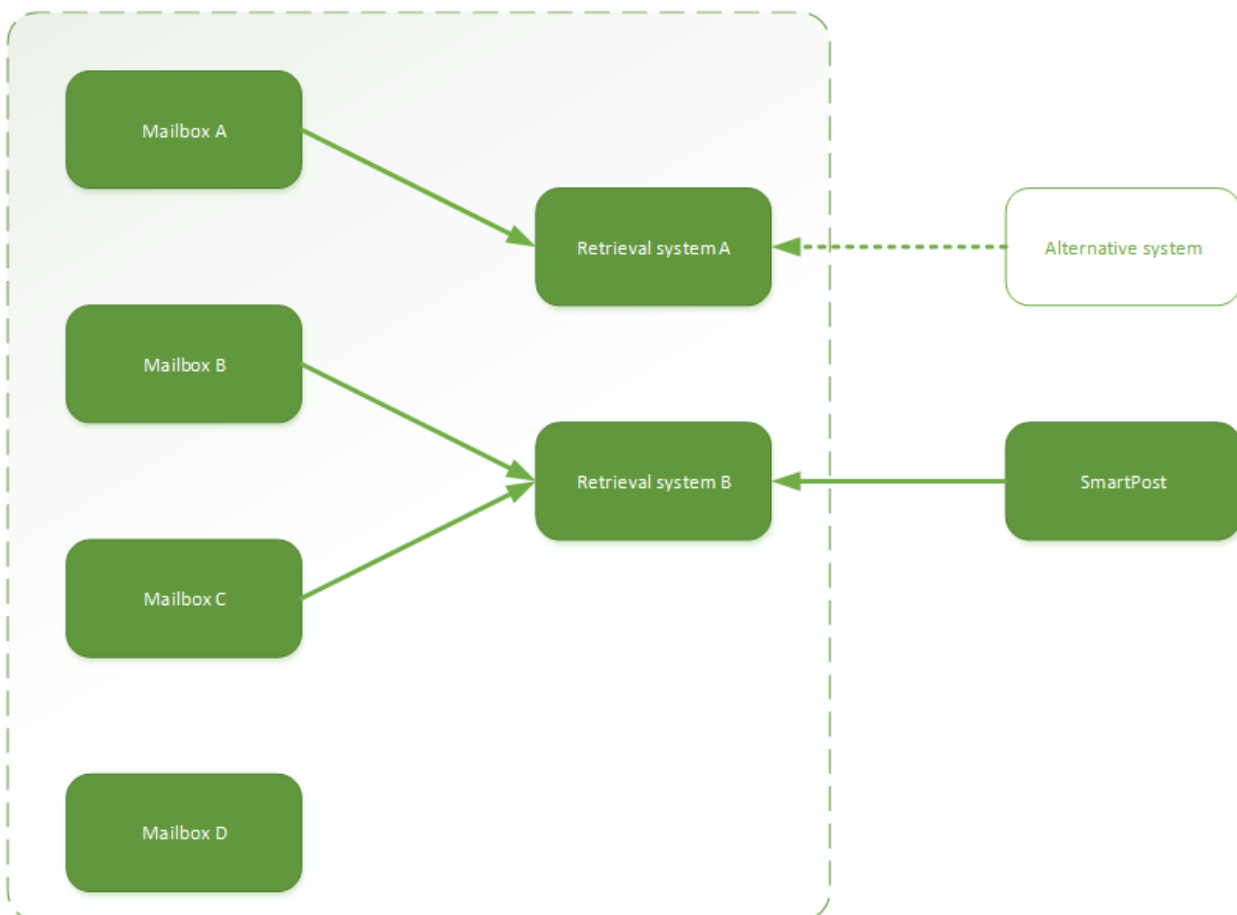

The table below describes the values with which an e-Boks mailbox can be configured.

Value name	Value	Description
Name	For example: "Mail for organization"	The name of the mailbox as the end user sees it.

Value name	Value	Description
Description	This mailbox is used for replying to messages sent by SmartPost as well as unsolicited messages.	A description of the mailbox for users who later use the administration portal.
Instructions	Send mail to this mailbox if you want to contact the organization.	Description of the mailbox that the end user sees.
Select folder for placing the mailbox	See notes	In a minimum configuration, there will only be one mailbox, and this mailbox will be the root mailbox. In such a case, the selection must be empty. In cases of more complex configurations with more mailboxes, the selection is based on the planned mailbox hierarchy.
Activation date	Now	Specifies the date where the mailbox will be active, that is visible to the end user.
External code can be used freely by suppliers and is available via system call	Empty	Not used.
This mailbox must be used by default for reception of mail, in cases where the end user makes a direct request	Selected	<p>In the minimum configuration, the same mailbox will be used for both end user requests and unsolicited requests. In this case, the mailbox must be the default mailbox, for which reason the field must be selected.</p> <p>In cases of more complex configurations with more mailboxes, this mailbox is not necessarily selected by default.</p>

Value name	Value	Description
The mailbox must be visible to the end user	Selected	<p>In the minimum configuration, the same mailbox will be used for both end user requests and unsolicited requests. In this case, the mailbox must be visible so that the end user can use it for unsolicited requests.</p> <p>In cases of more complex configurations with more mailboxes, this mailbox is not necessarily visible.</p>

Create subject

A minimum of one subject for one of the mailboxes connected to the retrieval system from which SmartPost is to retrieve messages must be configured.

Value name	Value	Description
Subject name	For example: "Contact to organization"	The subject that the end user can choose in connection with sending in an unsolicited message for an authority.
Form	Empty	Not supported by SmartPost.

Remote print

Before you can start setting up and configuring remote print, the organization must make an agreement with the selected print center, Strålfors or KMD Printcenter.

Strålfors agreement

Before you can start to use Strålfors Connect for remote print, the following prerequisites must be fulfilled:

- The organization must make an agreement with Strålfors.
- The organization must get a certificate. It is possible to use the same certificate as the one used for e-Boks, but it needs to be clarified with Strålfors.
- Find out which protocol Strålfors uses.

See also [Configure remote print](#).

OneTooX agreement with KMD Printcenter

Before you can start to use OneTooX and send SmartPost messages to KMD Printcenter for printing, the following prerequisites must be fulfilled:

- The organization must make an agreement with KMD Printcenter.
- The organization must get a OneTooX system key from KMD Printcenter. The system key is a PKE file.
- Document types must be defined and set up by KMD Printcenter. The OneTooX document types contains information about the dispatch of a document, for example if it is A or B mail, the envelope type, single-sided or double sided, and so on.

OneTooX requires at least one documentation type.

You need the names of the document types for configuring SmartPost print types.

See also Configure remote print.

Configure digital mail

SmartPost uses e-Boks to implement digital mail (Digital Post). For SmartPost to be able to communicate with e-Boks, the organization must make an agreement (tilslutningsaftale) with e-Boks first.

SmartPost supports Digital Post 1 and 2.

To configure digital mail using e-Boks, you need to complete the following steps.

1. Acquire and install a certificate.
2. Ensure Internet access.
3. Configure the dispatch system.
4. Configure the retrieval system.

You need to complete all steps for both test and production environments.

Certificate

The organization must acquire and install a certificate (funktionscertifikat) with a password. See [Acquire and install the e-Boks Certificate](#).

Apply the certificate to the SmartPost process

You must add the private key of the IIS user that runs the WzpSvc app pool to the e-Boks certificate and set up the e-Boks dispatcher to run with this certificate. See [Apply certificates to SmartPost](#).

Internet access

For SmartPost to be able to communicate with e-Boks, it is required that the server that runs SmartPost has Internet access to e-Boks.

Environment	URL	Port
Test	https://demo-rest.e-boks.dk/V1.svc	443
Production	https://rest.e-boks.dk/v1.svc	443

For Microsoft Windows Server 2008 R2, you must make TIS 1.2 available to the operating system. See [Add the TLS 1.2 key to Registry \(Windows Server 2008 R2\)](#).

As SmartPost is deployed on the web servers, it is only required to open for access to e-Boks from the web servers.

Configure the dispatch system

When you have uploaded the certificate and configured a dispatch system using the Digital Post Administration portal, you need to configure SmartPost to reflect the configuration of the dispatch system. See [Configure SmartPost for sending messages](#).

For information about creating a dispatch system, refer to [Vejledninger Digital Post](#) from Digitaliseringsstyrelsen.

Configure the retrieval system

When you have uploaded the certificate, you can start configuring a retrieval system using the e-Boks Administration portal. The minimum configuration of a retrieval system consists of a mailbox and a subject, to which you attach the retrieval system. Next, you need to configure

SmartPost to reflect the configuration of the retrieval system. See [Configure SmartPost](#) for receiving messages.

Configure remote print

SmartPost supports Strålfors Connect and KMD OneTooX for remote print. Before you can start to configure SmartPost to use OneTooX or Strålfors Connect, the authority or company must make an agreement with KMD Printcenter or Strålfors depending on which print center will be used.

Strålfors

To configure remote print using Strålfors, you need to complete the following steps.

1. The authority or company must make an agreement with Strålfors and install a certificate. See [Apply the certificate to the SmartPost process](#).
2. Set up the test and production systems. See [Test and production systems](#).
3. Configure a Strålfors dispatcher. See [Configure dispatchers](#).
4. Include the Strålfors dispatcher in a dispatch sequence. See [Configure dispatch sequences](#).
5. Configure Strålfors print types. See [Configure print types](#).

You need to complete all steps for both test and production environments.

Certificate

Strålfors will assist with the installation of the certificate and the necessary configurations. When this is in place, you configure SmartPost with system ID, password, and certificate thumbprint.

You can clarify with Strålfors whether you can use the same certificate that you use with e-Boks, or if you need an additional certificate.

This process applies to both test and production.

Apply the certificate to the SmartPost process

You must add the private key of the IIS user that runs the WzpSvc app pool to the Strålfors certificate and set up the Strålfors dispatcher to run with this certificate. See [Apply certificates to SmartPost](#).

Test and production systems

For SmartPost to be able to communicate with Strålfors Connect, it is required that the server that runs SmartPost has access to Strålfors Connect via the Internet.

Environment	URL	Port
Test	https://testprint.sconnect.dk/fjernprint/1.0.0	443
Production	https://prodprint.sconnect.dk/fjernprint/1.0.0	443

For Microsoft Windows Server 2008 R2, you must make TLS 1.2 available to the operating system. See [Add the TLS 1.2 key to Registry \(Windows Server 2008 R2\)](#).

SmartPost is deployed on the web servers and therefore it is only required to get access to Strålfors from the web servers.


OneTooX

To configure OneTooX, you need to complete the following steps:

1. The organization must make a OneTooX agreement with KMD Printcenter.
2. Get a system key from KMD Printcenter, and configure it in WorkZone Configurator. See [Apply the OneTooX system key to SmartPost](#).
3. Define document types, which KMD Printcenter will create. Once created, get the names of the document types. You will need the names of the document types to set up print types in WorkZone Configurator. At least one document type must be defined.
4. Set up test and production systems. See [Test and production system](#).
5. Configure a OneTooX dispatcher. See [Configure dispatchers](#).
6. Include the OneTooX dispatcher in a dispatch sequence. See [Configure dispatch sequences](#).
7. Configure OneTooX print types. See [Configure print types](#).

Apply the OneTooX system key to SmartPost

You must specify the system key when setting up a OneTooX dispatcher.

1. Open the PKE file that you have received from KMD Printcenter in a text editor, for example Microsoft Notepad.
2. Select all the text and copy it to clipboard.
3. In WorkZone Configurator, go to **Process > Process dispatchers**.
4. Point to next to the OneTooX dispatcher, and click  **Edit parameters**.
5. Paste the system key in plain text into the **Systemkey** field.

Test and production system

For SmartPost to be able to communicate with OneTooX, you need to set up a test and production system.

Environment	URL	Port
Test	https://test.doc2mail.dk/delivery/FileUploader.asmx	443
Production	https://privat.doc2mail.dk/delivery/FileUploader.asmx	443

Acquire and install the e-Boks Certificate

The organization needs a certificate from Nets for SmartPost to work as a dispatch system for e-Boks. The steps in the certificate process are:

1. Acquire a certificate (Funktionscertifikat)
2. Import the certificate in to the certificate store
3. Add the private key of the IIS user to the certificate
4. Export the P12 certificate to a CER certificate
5. Upload the certificate to e-Boks
6. Apply the certificate to the e-Boks dispatcher

Acquire a certificate (Funktionscertifikat)

An employee at the organization must order a certificate from Nets. The employee must be a NemID administrator at the organization and have an employee signature to be able to order a certificate. The employee will receive an email from Nets with an installation code to use to get the certificate from Nets and a password, which is connected to the certificate.

The employee starts the certificate process using the Nets link: https://www.nets-dan-id.dk/produkter/funktionssignatur/bestil_funktionssignatur/ and follow the instructions. When the process has been completed, the employee will receive an email with an installation code and a link to start the installation process. During the installation process, the employee selects the certificate type **PKC#12**, enters the installation code from the email, and creates a password for the certificate. The result of the installation is a certificate file.

Important: The certificate file and the password are connected and will be used later in the process.


Import the certificate in to the certificate store

You need to import the certificate in to the certificate store on the server that runs the SmartPost process using the **Windows Certificate Import Wizard**.

1. Double-click the certificate to start the **Certificate Import Wizard**.
2. On the Welcome page, click **Local Machine**, and then click **Next**.



3. Click Next until you reach the **Certificate Store** page, and then select **Automatically select the certificate store based on the type of certificate** option.

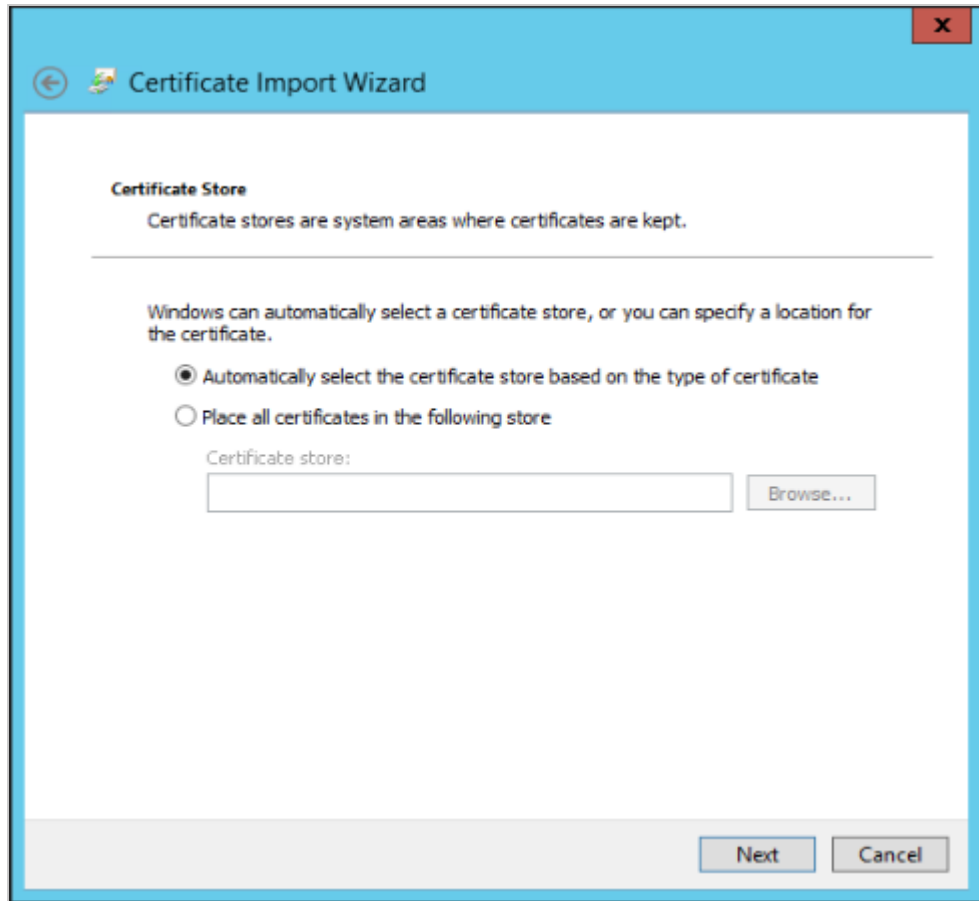

4. Complete the wizard.

Add the private key of the IIS user to the certificate


You must add the private key of the IIS user that runs the WzpSvc app pool, typically that is **IIS APPPOOL\WzpSvc**, to the SmartPost certificate. This is done in the **Certificate Manager**. See [Apply certificates to SmartPost](#) .

Export the P12 certificate to a CER certificate

The certificate file that is acquired from Nets is a P12 certificate, see the previous section. This certificate will be used by the dispatcher in WorkZone. However, in e-Boks you must register the certificate in the CER format. Therefore, you need to convert the P12 certificate file to a CER certificate file.

Export certificate

1. Open **Certificates Manager**.
2. Expand **Certificates Local Computer > Personal > Certificates**.
3. Right-click the SmartPost certificate, and then select **All tasks > Manage Private Keys > Export**. The **Certificate Export Wizard** starts.
4. Click **Next** until you get to the **Export File Format** page, and then select **BASE-64 encoded X.509 (.CER)**, and then click **Next**.
5. On the **File to Export** page, enter a name of the file to export, and then click **Next**.

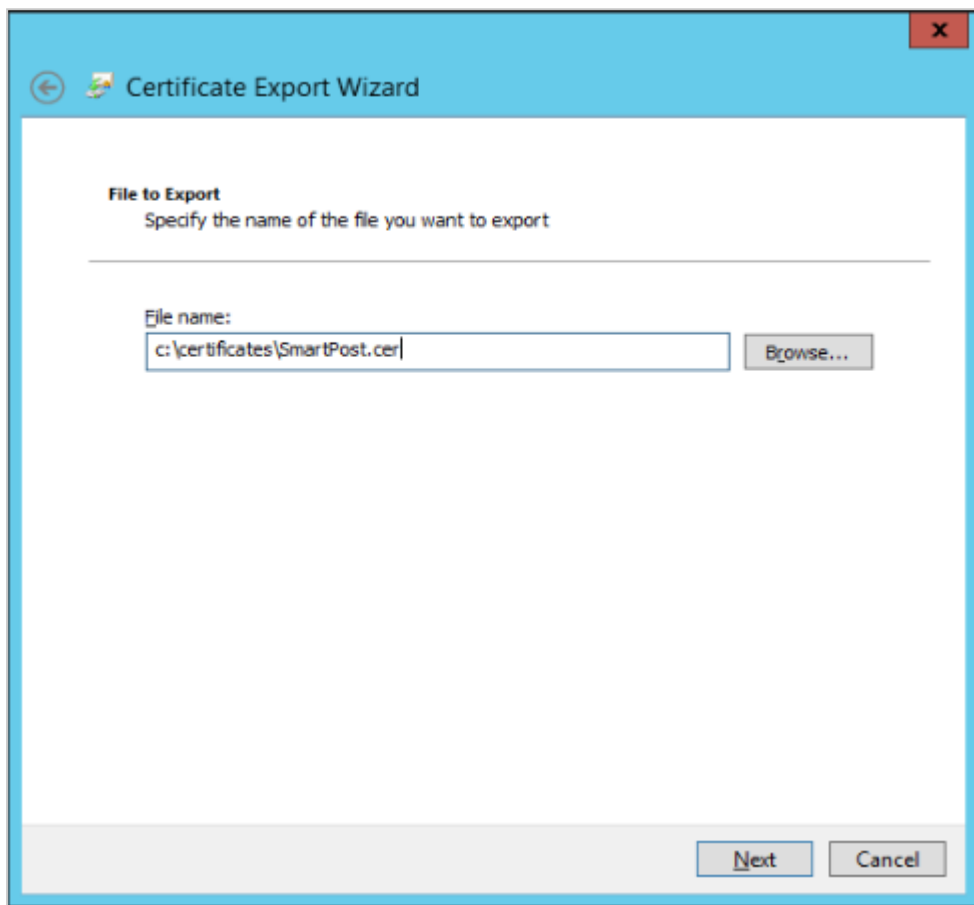

6. Complete the wizard.


A CER certificate file is created. The next step is to upload it to e-Boks.

Upload the certificate to e-Boks

You upload the CER certificate file to e-Boks using the e-Boks Administration Portal.


Upload certificate

1. In a browser, open the e-Boks Administration Portal
 Demo: <https://demo-ekstranet.e-boks.dk/>
 Production: <https://ekstranet.e-boks.dk>
2. Log in with your credentials.
3. On the **Welcome** page, select **Tilmeldingsmuligheder** (Registration options).
4. Click **Afsendersystemer** (dispatch systems), and then click the dispatch system, you want to use.

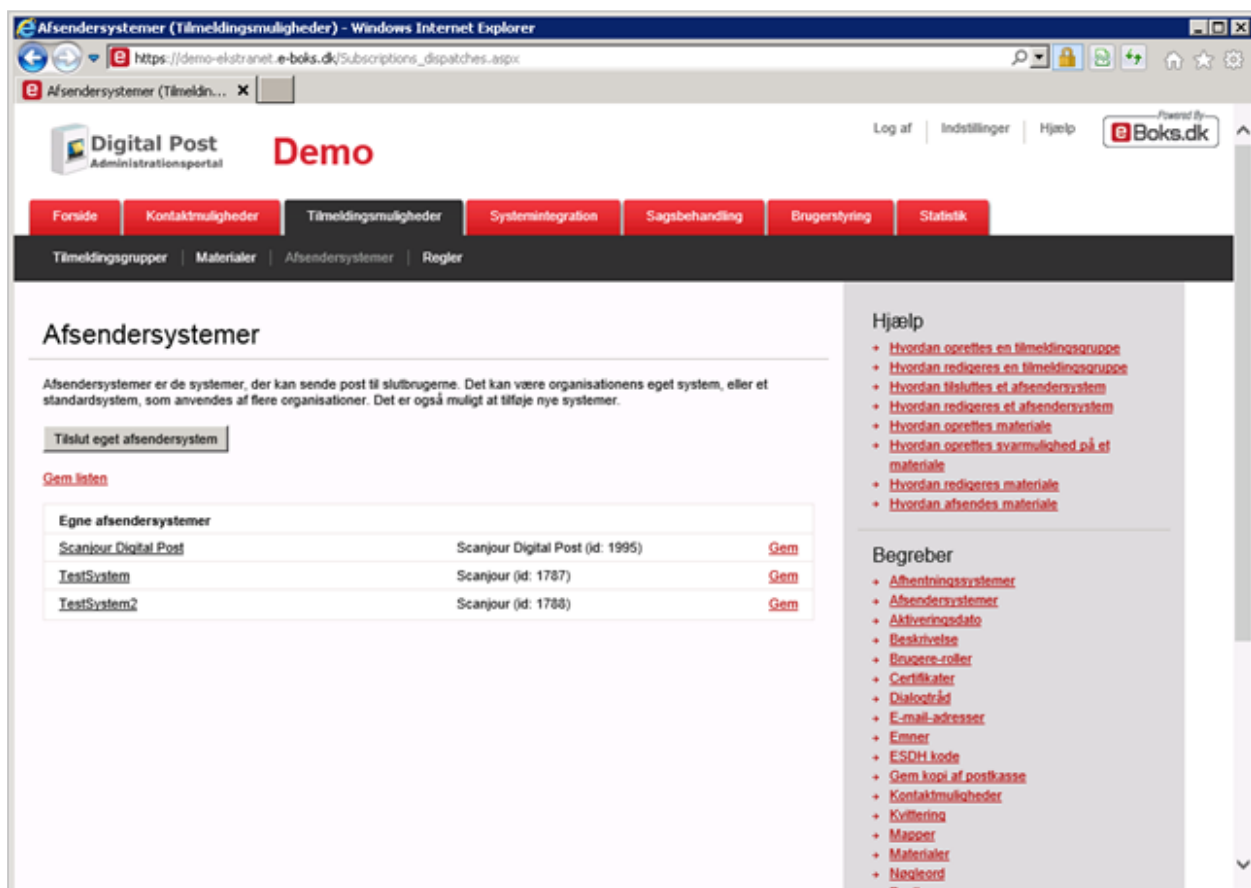

The **Rediger afsendersystem** (Edit dispatch system) page is shown.

5. On the **Rediger afsendersystem** page, scroll to the **Certifikat** (Certificate) section, and browse to locate the certificate.

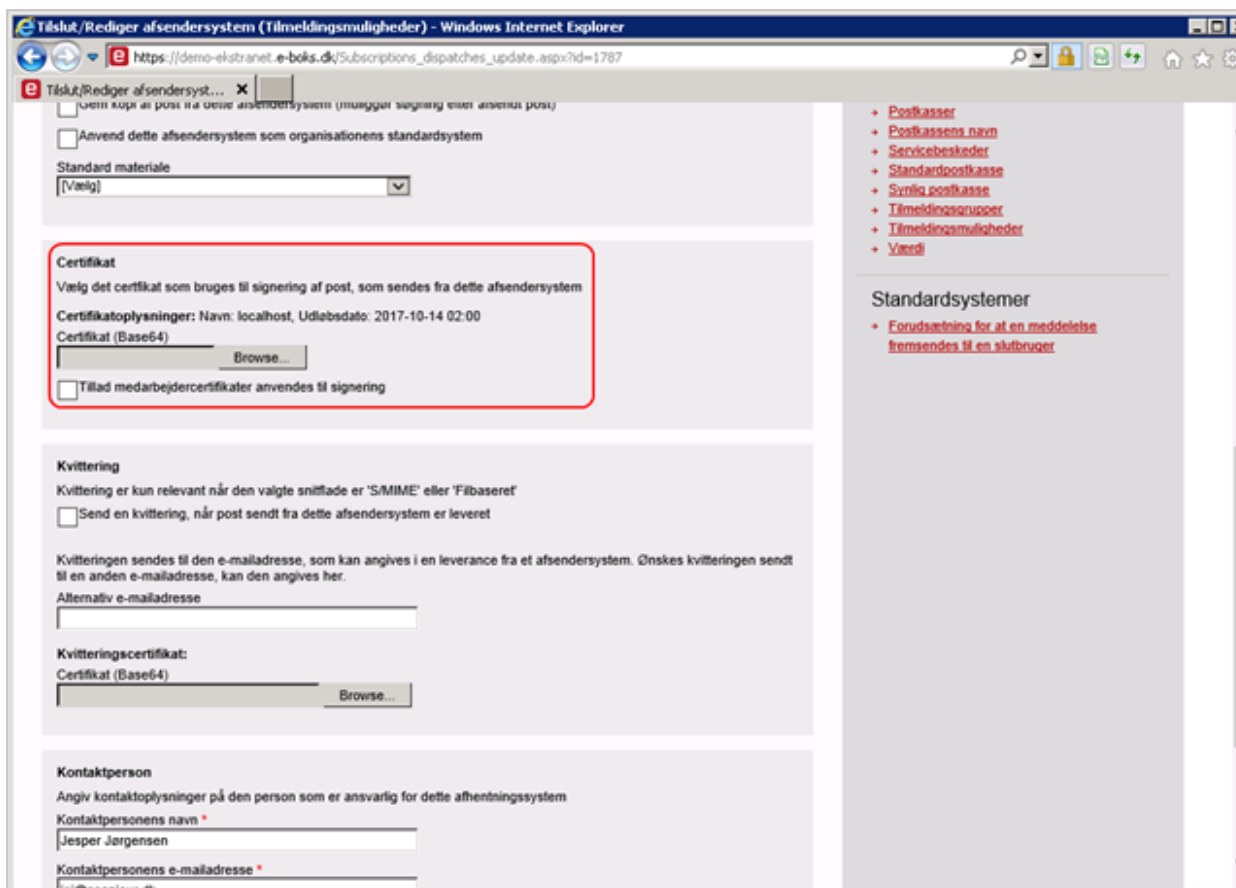

6. Click **OK**. The certificate is now registered in e-Boks.

Apply the certificate to the e-Boks dispatcher

You register the e-Boks certificate in WorkZone Configurator.

1. In WorkZone Configurator, click **Process > Process dispatchers**.
2. Select the **eBoks** dispatcher.
3. Enter the thumbprint of the certificate in the **EboksCertificateThumbPrint** field.

See also [Process dispatcher module](#) in the WorkZone Configurator Administrator Guide.

Apply certificates to SmartPost

Once you have received a certificate and imported it to the certificate store, you need to:


- Add the private key of the IIS user to the dispatcher certificate.
- Apply the certificate to the SmartPost dispatcher.

Add the private key of the IIS user to the dispatcher certificate



For the dispatchers, such as e-Boks and Strålfors, to work with SmartPost, you must add the private key of the IIS user that runs the WzpSvc app pool to the dispatcher certificates. Typically this is an **IIS APPPOOL\WzpSvc** user. This is done in the **Certificate Manager**. You need to locate the dispatcher certificate and manage its private keys. By default, the dispatcher certificates are located under the current computer account.

Important: You need to re-add the private key after upgrading WorkZone Process.

1. Open **Certificates Manager** (mmc.exe).
2. Expand **Certificates Local Computer > Personal > Certificates**.
3. Right-click the SmartPost certificate and select **All tasks > Manage Private Keys**.

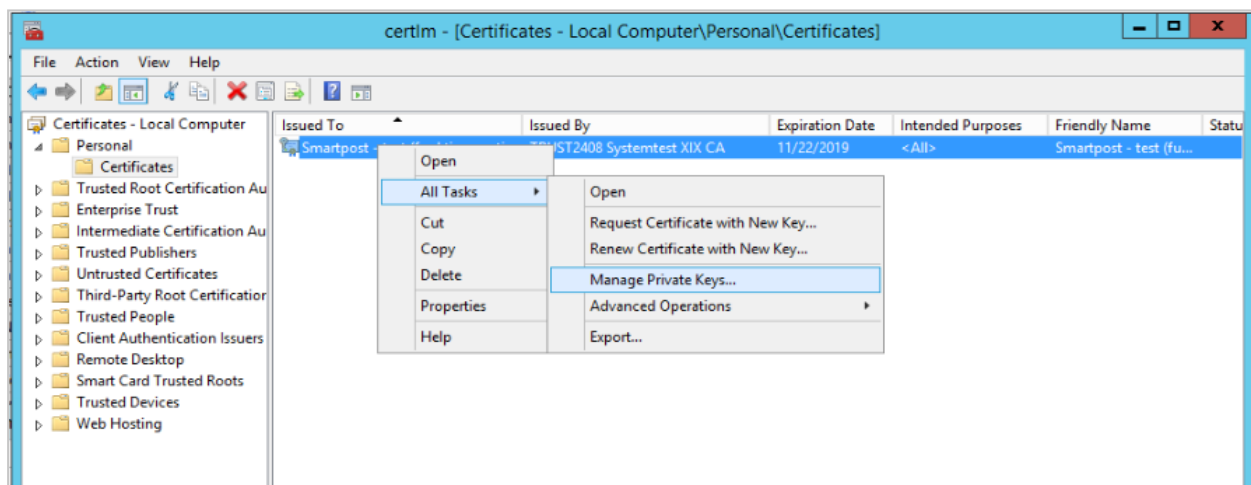

4. In the **Permissions** dialog box, click **Add** to add the private key, typically the **IIS APPPOOL\WzpSvc** user.

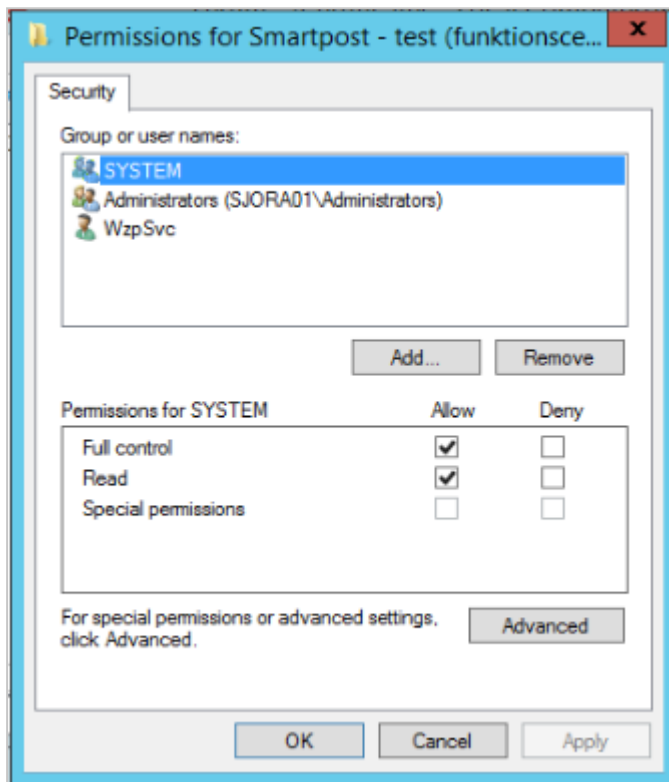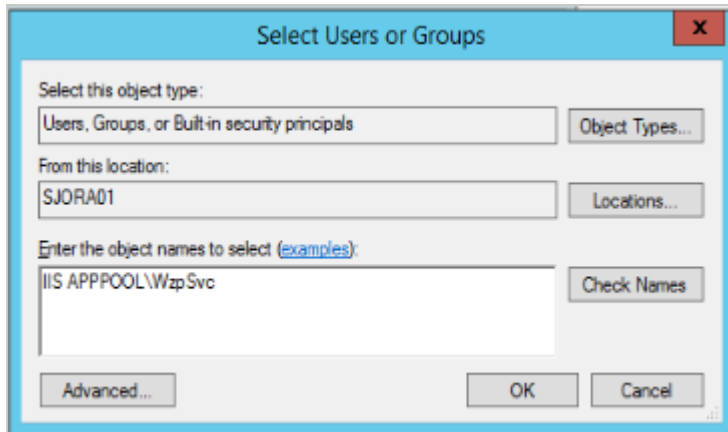


Copy thumbprint and apply the certificate to the dispatcher

You copy the thumbprint of the certificate from the Certificates Manager and paste it into the dispatcher settings in WorkZone Configurator.

1. Open **Certificates Manager** (mmc.exe).
2. Expand **Certificates Local Computer > Personal > Certificates**.
3. Double-click the SmartPost certificate.
4. In the **Certificates** dialog box, click the **Details** tab.

5. Select **Thumbprint** in the list.
6. Mark the thumbprint without the first space and press Ctrl + C to copy the thumbprint.

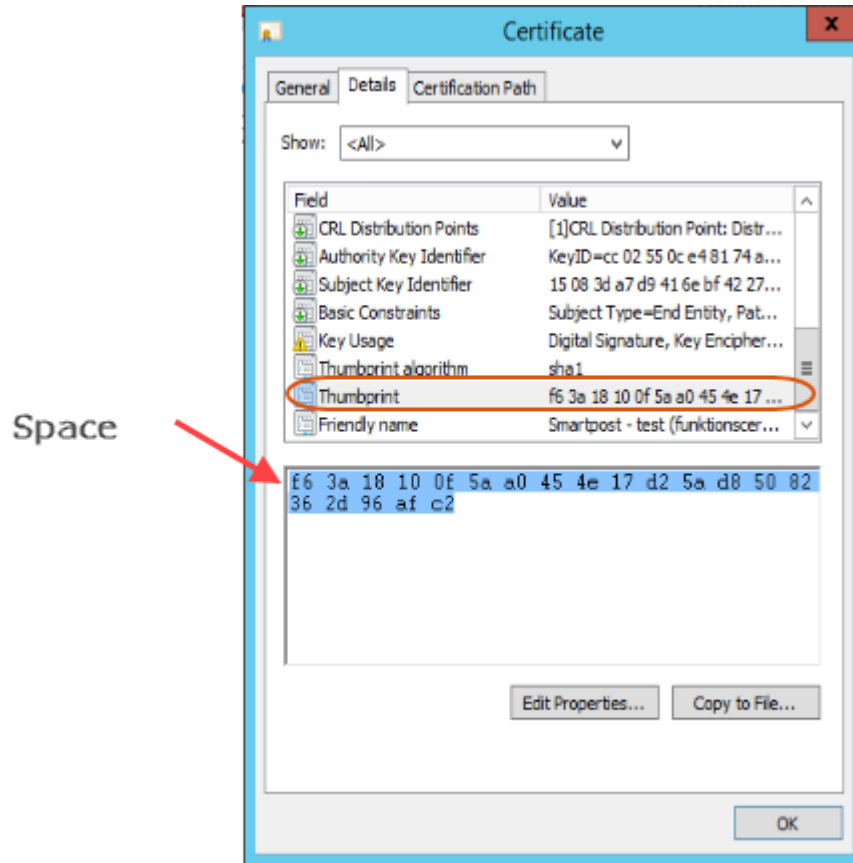

For more information about the extra space, please see Microsoft support article [Certificate thumbprint displayed in MMC certificate snap-in has extra invisible unicode character](#).

Apply the certificate to the dispatcher


You register the certificates in WorkZone Configurator.

1. In WorkZone Configurator, click **Process > Process dispatchers**.
2. Select a dispatcher, for example **e-Boks** or **Straalfors**.
3. Paste the thumbprint that you just copied into into the **Ebok-sCertificateThumbPrint** field.

See also Configure dispatchers and [Process dispatchers](#) in the WorkZone Configurator Administrator Guide.

Configure SmartPost

You configure SmartPost in WorkZone Configurator.

1. In WorkZone Configurator, go to **Process > Processes**.
2. Point to the **SmartPost** process.
3. Click  **Edit process parameters**.
4. Enter values for the parameters.

Parameter	Default	Description
CopyCoverPageRecordId		<p>The template that is used to create cover pages for copy recipients. If you leave the field empty, a default standard cover page will be used.</p> <p>The template must be saved in WorkZone.</p> <p>For more information about cover page templates, see Configure templates.</p>
ProtectedCoverPageRecordId		<p>The document that will be used as template for creating cover pages for copy recipients with protected addresses. If you leave the field empty, a default standard cover page will be used.</p> <p>The template must be saved in WorkZone.</p> <p>See Configure templates.</p>
DefaultMaterialId		<p>The e-Boks material that will be selected by default in the Send</p>

Parameter	Default	Description
		<p>SmartPost dialog box.</p> <p>To configure e-Boks materials, click Process > E-boks material. See Configure e-Boks materials and e-Boks materials in the WorkZone Configurator Administrator Guide.</p>
AllowedNameTypes	CPJV	<p>Select which contacts the users can select as recipients or copy recipients in the Send SmartPost dialog box. Allowed contact types are:</p> <ul style="list-style-type: none"> C - Persons with CPR P - Persons without CPR J - Companies with CVR V - Production units with CVR
SPDocumentSource		<p>Select the origin of the created SmartPost message. The possible settings correspond to the entries in the custom domain ACTOPR, for example SP, SmartPost, DP, Digital Post, and so on. The organization must provide this information. The setting is shown on the document in the Origin field in WorkZone Client.</p>
MaxCombinedMessageLength	10485760 (10 MB)	<p>When a user starts a SmartPost process, SmartPost calculates an estimated size of each of the messages sent to the recipients. Before SmartPost continues the process, the estimated size is compared with the MaxCombinedMessageLength setting. If the estimated size</p>

Parameter	Default	Description
		<p>exceeds the specified value, the user is asked to reduce the size of the documents and then try to send the message again. The reason for this is that large documents may cause the Workflow Host to run out of memory later in the flow, which causes workflows to be terminated without the user being notified.</p> <p>Generally, the default value is used.</p>
DefaultDispatcherSequenceld		<p>The default dispatch sequence that will be selected by default in the Send SmartPost dialog box.</p> <p>To configure dispatch sequences, click Process > Dispatch sequences. See Configure dispatch sequences and Dispatch Sequences in the WorkZone Configurator Administrator Guide.</p> <div data-bbox="963 1279 1481 1563" style="border: 1px solid #ccc; background-color: #e6f2ff; padding: 10px;"> <p>Important: Verify this value after successful installation. After installation, the dispatch sequences may have been renumbered.</p> </div>
DefaultRemotePrintTypeld		<p>The print type that will be selected by default in the Send SmartPost dialog box.</p> <p>To create or reconfigure print types, click Process > Print types. See Configure remote print and Print types in the WorkZone Configurator Administrator Guide.</p>

Parameter	Default	Description
StandardLetterFileNo		<p>The case number of the case that contains standard letters.</p> <p>See Configure standard letters.</p>
ReportID		Select the report you want to use for the history document.
RecordType	PROHIST	The document type of the history document that is generated by the SmartPost process.
RecordState		The document state of the history document that is generated by the SmartPost process.
CopyWatermark	Copy	The text that will be used as watermark on copies. The maximum length of the watermark is 60 characters. If the text exceeds 60 characters, the text will be cut.
TitleTemplate	{0}: {1} {2}	A template that is used to create the title of the history document. By default, the template has placeholders for the process type {0}, the process title {1}, and a date stamp {2}.
ApprovalEnabled	Turned on	<p>Shows or hides the Approval check box in the Send SmartPost dialog box.</p> <p>The parameter is turned on by default, which means that the user can select the Approval check box. You can turn off this parameter if your organization does not use the approval step in the SmartPost pro-</p>

Parameter	Default	Description
		cess.
RemergePDFEnabled	Turned off	<p>Re-merges the Letter date field in PDF documents when SmartPost messages are previewed or approved. Turn on this parameter if you want the letter date in the PDF documents to be updated with the preview or approval date before sending the SmartPost messages.</p> <p>The Letter date field on the meta data of the PDF document will also be updated with the date of approval.</p> <p>The letter date of the original letter document is not changed.</p>
ValidationProperty		Select the custom document field that holds the values.
ValidationValues		Specify which custom document values are allowed. Users will only be able to select documents (letter document and attachments) with these values in the Send SmartPost dialog box.
DocClassificationThresHold		The maximum document classification that is allowed to be used with SmartPost. Documents with higher classifications than specified for this parameter will not be available for selection in the SmartPost dialog box.
AllowSendingSeparateDocuments		Turn on this parameter if you want to

Parameter	Default	Description
		<p>allow that users send attachments as separate PDF documents in messages when using the e-Boks dispatcher.</p> <p>A Send attachment as separate documents (only e-Boks) check box will be shown in the Send SmartPost dialog box.</p> <p>By default, this parameter is turned on.</p> <p>The parameter is closely connected with the MergeAllDocuments parameter.</p>
DefaultSendSeparateDocuments		<p>Turn on this parameter if you want the Send attachment as separate documents (only e-Boks) check box to be selected by default in the Send SmartPost dialog box.</p>
MergeAllDocuments		<p>The parameter only has effect if you have turned on the AllowSendingSeparateDocuments parameter.</p> <p>If turned on, the SmartPost message will include:</p> <ul style="list-style-type: none"> • The letter and attachments in one PDF document. • The attachments as separate PDF documents. <p>If turned off, the SmartPost message will include:</p> <ul style="list-style-type: none"> • The letter in a PDF doc-

Parameter	Default	Description
		<p>ument.</p> <ul style="list-style-type: none"> The attachments as separate PDF documents. <p>Note that messages sent to recipients with protected addresses will not include a cover page, if this parameter is turned off.</p> <p>By default, this parameter is turned on.</p>
SendAttention		<p>Turn on this parameter if you want to send a task that will notify the process owner about a failed dispatch.</p> <p>By default, this parameter is turned on.</p>
TerminateOnFailedDispatch		<p>Turn on this parameter if you want to set the state of failed SmartPost dispatches to Terminated.</p> <p>By default, this parameter is turned off and failed dispatches get the status Completed.</p>
AllowOfficeReremerge		<p>Turn on this parameter if the content controls have already been merged in Word and you want to merge the content controls again when sending the message.</p> <p>For example, a case handler has merged address content controls in a letter document in Word but want to send the letter to multiple recipients. In this case, the address content controls will have to be merged</p>

Parameter	Default	Description
		<p>again to insert each of the recipients' address information in to the different letter documents.</p> <p>An empty content control in Word that results in a blank line will be removed and is therefore not remerged.</p> <p>By default, this parameter is turned off.</p>
PdfFailIfOutOfBounds		<p>Turn on this parameter if you do not want to send messages that include documents with content that do not fit to the page, for example, a Word document with a table that exceeds the page bounds. If the parameter is turned on, the PDF conversion will fail and thus the dispatch will fail. The history document will show an error message.</p> <p>By default this parameter is turned off. Documents will be converted to PDF despite the content being out of bounds and the message will be sent.</p>

See also [Processes](#) in the WorkZone Configurator Administrator Guide.

Configure CPR and CVR

When the SmartPost process sends or receives messages, it identifies the sender in the messages based on the addresses.

In WorkZone Configurator, two parameters, **PartyIdentifierSources** and **ContactAddressKeySources**, are used to identify sender information.

- In WorkZone Configurator, click **Process > Process settings**.

Parameter	Description
PartyIdentifierSources	Specifies where the SmartPost sending process looks up sender information such as CVR or CPR numbers.
ContactAddressKeySources	Specifies where the receiver workflow looks up sender addresses based on the CVR and CPR numbers provided by e-Boks. For example, for the purpose of linking the received documents to the addresses of the senders.

The values of these settings are XML elements that identify where SmartPost looks up sender information. By default the standard location of CPR and CVR data is specified in the XML elements.

Handling multiple addresses in received messages

When SmartPost receives a message with a CPR or CVR number, the CPR or CVR number may be connected with several contacts and addresses. The e-Boks receiver workflow retrieves the data and registers the contact information on the contact that is associated with the document that is created when a message is received. The following rules apply:

- **If no addresses are found**, no parties are associated with the document.

Example

An unsolicited message with an unknown identifier is received. No contacts can be identified based on the CPR or CVR number because the contact does not exist as a WorkZone contact. Therefore, no parties are associated with the document that was created.

- **If only one address is found**, the contact is associated with the document using this address . The role **Sender (Afsender)**.

Example

An unsolicited message is received. It has a known identifier (CPR or CVR number), which is associated with one contact with one address. This is the simple situation, for example when a small business or a person sends a message from e-Boks. The address is used to create a party on the document with the role **Sender**.

- **If two or more addresses are found**, no parties are associated with the document. An information field is added to the document, which informs the user about the number of addresses found. Based on the information in this field, the user can make a query for documents created by this situation, and then do corrections manually. By default, the custom label is named MULTIADDR but it is configurable.

Example

An unsolicited message is received. It has a known identifier with one contact with multiple addresses. One contact is identified with several active addresses. The message is from a company where multiple addresses are registered in WorkZone.

No contacts will be associated with the document. The MULTIADDRESS information field is added to the document and shows the number of addresses found.

Example

An unsolicited message is received. It has a known identifier with multiple contacts with multiple addresses.

Multiple contacts can be identified from the identifier. There are multiple addresses associated with the contact. For example a large company where WorkZone Client has registered the same CVR number on multiple contacts, where each contact has a unique P-number (production unit), for example subsidiaries of the company. Some of the production units have several addresses registered in WorkZone.

No contacts will be associated with the record. The information field MULTIADDRESS is added to the document and shows the number of addresses found.

CPR and CVR data in other locations

Some organizations store CPR and CVR data in other locations than the default WorkZone location. In this case, you can set up the SmartPost process to look up data in these locations by customizing or extending the XML elements in the **PartyIdentifierSources** and **ContactAddressKeySources** parameters in the **Process settings** in WorkZone Configurator.

For example, your organization may store CPR data in a custom field in the **Contacts** register rather than using the standard **ID** field. In this example, you must:

1. Create a new contact type in the WorkZone database. Note that you can view and edit [contact types](#) in WorkZone Configurator but you cannot create contact types. You must add new contact type to the `Contacts` register.
2. [Create a custom field](#) in WorkZone Configurator to hold the CPR number.
3. In WorkZone Configurator, go to **Process > Process settings** and add a new `<party-identifier-source>` element to the XML in the **PartyIdentifierSources** parameter. You can copy an existing `<party-identifier-source>` element and modify it to match the new storage of CPR numbers.

In this example, the new contact type (`name-type`) has the code 8, the custom field has the code `CPR_Value`.

```
<party-identifier-source name-type="8" class-
s="WorkZone.Dispatcher.Base.ODataPartyIdentifierSource">
<register-name>Contacts</register-name>
<query-template>?$filter=ID eq '{ }'&amp;$select=CPR_Value,NameType_
Value</query-template>
<field-name>CPR_Value</field-name>
</party-identifier-source>
```

Parameter	Description
name-type	Code of the contact type.
register-name	The name of the register that the OData query will be based on.
query-template	The template that used to form the OData query. When the <code>GetPartyIdentifier(string, ODataService)</code> method is invoked, then two empty curly braces (<code>{ }</code>) will be replaced with the party identifier, which is the first parameter in the method. You can specify a search criteria in the filter part of the query.
field-name	The name of the field which content

Parameter	Description
	will be returned by the method. The field is expected to contain the code of the Party Identifier.


Advanced configuration

You can read more about the implementation and function of the **PartyIdentifierSources** instance and how you can customize the configuration and/or extend it in the WorkZone Process Developer Guide. See [Configure PartyIdentifierSources](#) and [Configure SmartPost ContactAddressSources](#).

Configure SmartPost for sending messages

Configure dispatchers

You can configure a number of dispatchers to handle different ways of sending messages. SmartPost is delivered with 4 default dispatchers.

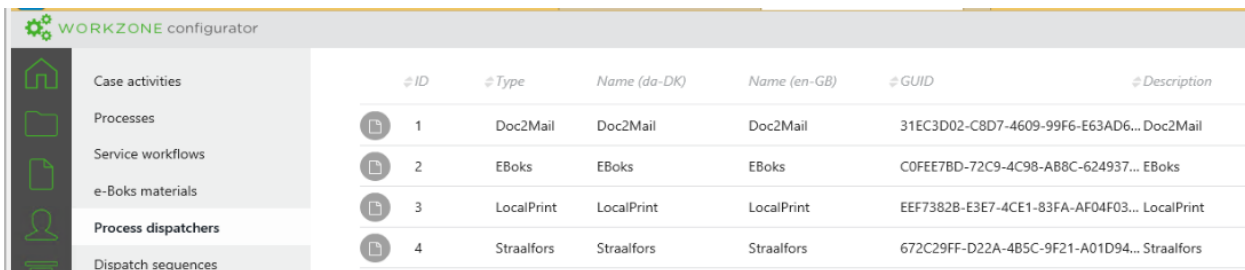

The screenshot shows the 'WORKZONE configurator' interface. On the left is a navigation menu with options: Case activities, Processes, Service workflows, e-Boks materials, Process dispatchers (highlighted), and Dispatch sequences. The main area displays a table of dispatchers:

# ID	# Type	Name (da-DK)	Name (en-GB)	# GUID	# Description
1	Doc2Mail	Doc2Mail	Doc2Mail	31EC3D02-C8D7-4609-99F6-E63AD6...	Doc2Mail
2	EBoks	EBoks	EBoks	C0FEE7BD-72C9-4C98-AB8C-624937...	EBoks
3	LocalPrint	LocalPrint	LocalPrint	EEF7382B-E3E7-4CE1-83FA-AF04F03...	LocalPrint
4	Straalfors	Straalfors	Straalfors	672C29FF-D22A-4B5C-9F21-A01D94...	Straalfors


You can modify the default dispatchers to match your organization's needs or you can create new dispatchers.

You can create dispatchers of the following types:


- **e-Boks** - The message is sent to the recipient's digital mailbox in e-Boks.
- **Strålfors** - The message is sent to Strålfors that handles the printing, enveloping, and handover to PostNord.
- **OneTooX** - The message is sent to KMD Print Center that handles the printing, enveloping, and handover to PostNord.
- **Local print** - The WorkZone user receives a smarttask that includes the SmartPost messages in PDF format. The user handles printing, enveloping, and sending of the messages manually.

Configure dispatchers

You create and configure dispatchers in WorkZone Configurator.

1. In WorkZone Configurator, click **Process**
2. Click **Process dispatchers**.
3. Point to next to the dispatcher you want to use, for example **e-Boks**, and click  **Edit**. Change the values so that they match your organization, such as the name and description of the dispatcher, start and end date, and access rights. See [Process Dispatchers](#) in the WorkZone Configurator Administrator Guide for a description of the dispatcher settings.

- Or -

Click  to create a new dispatcher. In the **Select dispatcher** dialog box, select the type of dispatcher you want to create.

The dispatcher version number



The dispatcher version number, which is displayed next to the dispatcher type, corresponds to the WorkZone Process release that you are running. When you upgrade WorkZone Process, a new version of the dispatcher is created with a version number that corresponds to the new release, and the previous dispatcher version automatically gets an end date. Ongoing SmartPost processes will continue to run using the previous version, and new SmartPost processes will use the new version of the dispatcher. On the **Process dispatcher** tab in WorkZone Configurator, all dispatcher versions are listed.

It is not recommended to make changes to old dispatchers nor remove the end dates of old dispatchers.

4. Click **Save** to save the changes you made to an existing dispatcher, or **Create** to create a new dispatcher.

The next step is to customize the default dispatcher parameters according to your organization, or if you created a new dispatcher, define the parameters from the start.

Edit dispatcher parameters

1. Point to , and click  **Edit dispatcher parameters**.
2. Fill in the values for the parameters. The parameters are specific to the dispatcher type.

E-Boks parameters

Name	Default	Description
SenderSystemId		The sender system identifier, which is retrieved during the configuration of the system in the e-Boks administration portal.
ReceiverSystemId		The receiver system identifier, which is retrieved during the configuration of the system in the e-Boks administration portal.
URL	<code>https://rest.e-boks.dk/v1.svc</code>	<p>The URL for the e-Boks service.</p> <p>Enter one of the URLs depending on whether the configuration is made for test or production.</p> <p>Test system: <code>https://demo-rest.e-boks.dk/v1.svc</code></p> <p>Production system:</p>

Name	Default	Description
		<p><code>https://rest.e-boks.dk/v1.svc</code></p>
CertificateThumbPrint		<p>The thumbprint that identifies the e-Boks certificate.</p>
ResponseThreshold	1800	<p>Defines the maximum time that SmartPost expects that it takes e-Boks to process a message. Specify the threshold in seconds. The default value is 1800 seconds (30 minutes).</p> <p>The default value is most often used. In situations where the communication with e-Boks is slow, you can increase it.</p>
MaxDocumentSize	78643200	<p>The maximum size of an e-Boks message in bytes. Messages that exceed this limit will not be sent to e-Boks. The default value is 78643200 (75 MB).</p> <p>e-Boks determines the maximum size. If e-</p>

Name	Default	Description
		<p>Boks changes the size, you can change this configuration accordingly but due to encoding you must reduce the size set by e-Boks by 25%. For example, if the size set by e-Boks is 99,5 MB, you must set the MaxEBook- sDocumentSize parameter to 99,5 MB * 75% = 75 MB.</p>
SenderName	KMD	The name of the company.
ReceiverUrl	https://<host-or-data-base>/EboksPushService/api/MeddelelseV2	The URL for receiving messages using Digital Post 2. If the parameter is left empty, the default URL in the Url parameter is used.
DP2Url	https://demo-api.e-boks.com/oio/rest/srv.svc/2	The URL for receiving messages using Digital Post 2. If the parameter is left empty, the default URL in the Url parameter is used.

Strålfors parameters

Name	Default	Description
SenderSystemID		The system identifier, which is provided when configuring the system in the Strålfors administration portal. Either Strålfors or the person, who configures the portal for Strålfors, must provide this identifier.
Url	https://prodprint.sconnect.dk/fjernprint/1.0.0	<p>The URL for the Strålfors Connect service. Depending on whether the configuration is made for test or production, enter one of the two URLs.</p> <p>Test: https://test-print.sconnect.dk/fjernprint/1.0.0</p> <p>Production: https://prodprint.sconnect.dk/fjernprint/1.0.0</p>
CertificateThumbprint		Enter the thumbprint that identifies the Strålfors certificate.
ResponseThreshold	-1	<p>Defines the maximum time that SmartPost expects that it takes to send a message to Strålfors. This value is used to calculate the deadline (supervised by the deadline monitor). The value is an integer, which (if positive) specifies the threshold in seconds.</p> <p>Normally, the default setting is used.</p> <p>If the communication with Strålfors is very slow, you can specify a high value.</p>
MaxDocumentSize	375000000	The maximum number of bytes that a message for remote print can contain. Messages that exceed this limit will not be sent for remote print. The default value is 375000000 bytes (375 MB).

Name	Default	Description
		Unless otherwise communicated, it is recommended to keep the values provided at the installation.
SenderName	KMD	The name of the company that is used in the postal address. The postal address is used when Strålfors produces the letters. The company name is taken from the address on which the authority will receive letters and returned mail.

OneTooX parameters

Name	Default	Description
URL	https://privat.- doc2mail.dk/ deliv- ery/FileUploader.aspx	The URL for the OneTooX service. Test: https://test.- doc2mail.dk/delivery/FileUploader.aspx Production: https://private.- doc2mail.dk/delivery/FileUploader.aspx
SystemKey		Enter the system key in clear text. Copy and paste the content of the system key file (PKE file) that you have received from KMD Print-center in to this field. If you work with WorkZone Configurator in Microsoft Internet Explorer and encounter problems with the system key not being pasted correctly, please open WorkZone Configurator in Google Chrome and try to paste the key again.
ResponseThreshold	600	The maximum time in seconds that a communication channel with OneTooX is open.

Name	Default	Description
		Default is 600 seconds (10 minutes).
MaxDocu- mentSize	1000000	The maximum number of bytes that OneTooX will send. Numbers higher than 99600000 will be truncated.
SenderName	KMD	The name of the company.

Local print parameters

Name	Default	Description
LocalPrintResponseThreshold	1800	Defines the maximum time that SmartPost expects that it takes for local print to process a message. This value is used to calculate the deadline (supervised by the deadline monitor). Specify the threshold in number of seconds. The default value is 1800 seconds (30 minutes). The default value is most often used.
SenderName	KMD	The name of the company.


Configure dispatch sequences

A dispatch sequence is a prioritized set of dispatchers that the SmartPost user can select in the **Send SmartPost** dialog box. For example, a user may select a sequence named **Send by digital mail or else remote print else local print**. In this case, SmartPost tries to use e-Boks as the dispatcher to reach the recipient of a message. If the sending fails, SmartPost uses Strålfors instead, and finally if this sending also fails, SmartPost sends the message to the user for printing locally.

You can configure several dispatch sequences and define which sequence to display as the default dispatch sequence in the **Send SmartPost** dialog box.

Dispatch sequences in the SmartPost package

SmartPost is delivered with the 5 dispatch sequences shown below. The dispatch sequences are ordered according to the values in the **Order** column, and they display in this order in the **Send SmartPost** dialog box. You can use the dispatch sequences as is, modify the naming and order, or create new sequences that include dispatchers that match your organization.

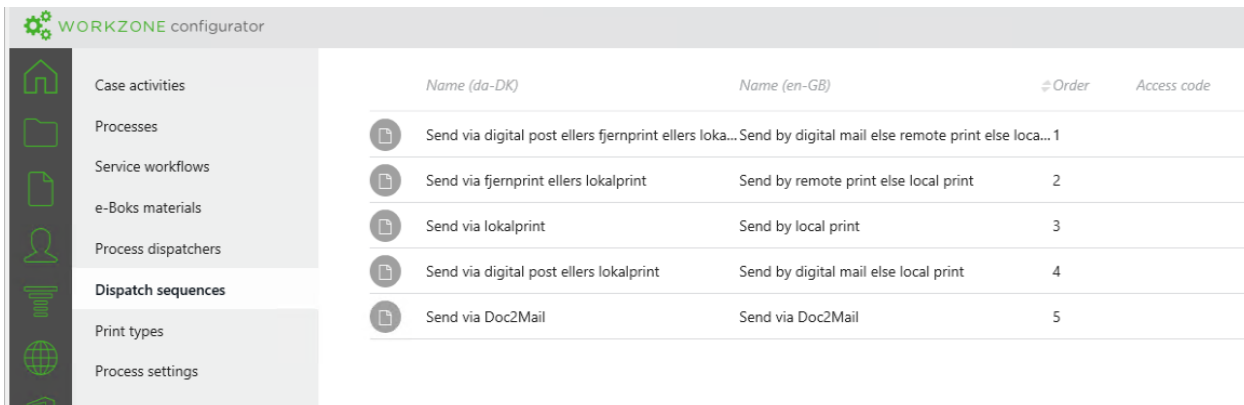

The screenshot shows the 'WORKZONE configurator' interface. On the left is a navigation menu with icons and labels: Case activities, Processes, Service workflows, e-Boks materials, Process dispatchers, Dispatch sequences (highlighted), Print types, and Process settings. The main area displays a table of dispatch sequences.

	<i>Name (da-DK)</i>	<i>Name (en-GB)</i>	<i>#Order</i>	<i>Access code</i>
	Send via digital post ellers fjernprint ellers loka...	Send by digital mail else remote print else loca...	1	
	Send via fjernprint ellers lokalprint	Send by remote print else local print	2	
	Send via lokalprint	Send by local print	3	
	Send via digital post ellers lokalprint	Send by digital mail else local print	4	
	Send via Doc2Mail	Send via Doc2Mail	5	

Digital mail

When the e-Boks dispatcher is used, SmartPost sends the message to the recipient through e-Boks if the following criteria are met:

- SmartPost must have access to the recipient's CPR or CVR number.
- SmartPost verifies that the recipient subscribes to a registration group that matches the selected logical registration group. SmartPost also verifies that the registration group matches the recipient type, that is citizens or companies.
- The size of the message does not exceed the limit defined by e-Boks.

If the sending fails, SmartPost will try to send the message using the next dispatcher specified in the dispatch sequence, through Strålfors or OneTooX.

Remote print

When the Strålfors or OneTooX dispatcher is used, SmartPost sends the message to the recipient if the following criteria are met:

- The recipient has a valid postal address:
 - Name of the recipient.
 - At least one address line.
 - A postal code.

- The size of the message does not exceed the limit defined by the dispatcher.

If the sending fails, SmartPost will try to send the message by using the next dispatcher specified in the dispatch sequence, for example local print.

Local print

When the local print dispatcher is used, SmartPost generates an email with the message as an attachment. The email will be sent to the user, who started the SmartPost process. It is then up to the user to print the message and handle the dispatch manually.


Create or modify dispatch sequences

You create and configure dispatch sequences in WorkZone Configurator. The dispatch sequences that you create will be available to user in the **Dispatch sequence** field in the **Send SmartPost** dialog box.

The screenshot shows the 'Send SmartPost' dialog box with the following fields and sections:

- Title:** Test
- Letter:** D-43, Test, 10/07/2018
- Delete original letter after sending
- Attachments:** 1 attachment: D-43, Test, 10/07/2018
- Recipients:** 1 recipient: Satellite User #1, 5000 Odense C
- Copy recipients:** Search field for copy recipients.
- Dispatch sequence:** A list of five sequences, with the second one highlighted in red. A red box highlights this entire section.
- Approval
- [Help](#)
- Start** and **Cancel** buttons.

You can use the dispatch sequences as they are, modify the naming and order, or create new sequences that match your organization. To create a new dispatch sequence, you must first create the dispatch sequence, and then add dispatchers to it.

1. In WorkZone Configurator, click **Process**
2. Click **Dispatch sequences**.
3. Point to  next to the dispatch sequence that you want to use, for example,


Send by digital mail else remote print else local print, and click  **Edit**.

Change the values so that they match your organization, for example, change the

names you want to display to the users in the **Localize name** fields and the order in the **Order** field.

- Or -




Click  to create a new dispatch sequence, enter a name for the sequence in the **Name** field and a number in the **Order** field. The dispatch sequence will be displayed according to this number in the **Dispatch sequence** field in the **Send SmartPost** dialog box.

4. Fill in other parameters that are relevant for your organization. See [Create a dispatch sequence](#) in the WorkZone Configurator Administrator Guide for a description of each parameter.
5. Click **Save** to save changes you made to existing sequences or **Create** to create a new sequence.

If you created a new dispatch sequence, the next step is to add dispatchers and define the order of the dispatchers in the sequence.

Add dispatchers to a dispatch sequence


1. In WorkZone Configurator, click **Process > Dispatch sequences**.
2. Point to the dispatch sequence to which you want to add dispatchers, and click  **Define dispatch sequence**.
3. Click **Add dispatcher**, select the dispatcher you want to add to the sequence, and specify its order in the dispatch sequence.

Remove a dispatcher from a sequence

- Click  to remove a dispatcher from the dispatch sequence.

Set up a default dispatch sequence

You can specify a default dispatch sequence, which will be preselected in the **Send SmartPost** dialog box.

1. In WorkZone Configurator Click **Process**.
2. Click **Processes**.
3. Point to next to the **SmartPost** process, and click  **Edit process parameters**.
4. In the **DefaultDispatcherSequenceId** field, select the dispatch sequence that you want to be preselected in the **Send SmartPost** dialog box.

Configure e-Boks materials


An e-Boks material is a configurable item in e-Boks that describes what to be communicated to the e-Boks user. SmartPost needs to know the materials in order to send messages through e-Boks.

The material determines if the user can reply to a message. Before you configure SmartPost, the organization needs to configure both the materials and the connection with registration groups the e-Boks Administration Portal. Registration groups use either a material that is enabled or disabled for replies. Several registration groups can use the same material at the same time, which means that a registration group can share materials with other registration groups. The organization decides if materials will be shared across registration groups.

When the organization creates a material in the e-Boks administration portal, the material is assigned a unique ID. You need this ID to set up materials in SmartPost. Please refer to the [e-Boks brugersupport](#) (e-Boks user support) for information about how to set up e-Boks materials in the e-Boks Administration Portal.

Configure e-Boks materials

You create and configure e-Boks materials in WorkZone Configurator. The e-Boks materials that you create are listed in the **e-Boks material** field in the **Send SmartPost** dialog box.

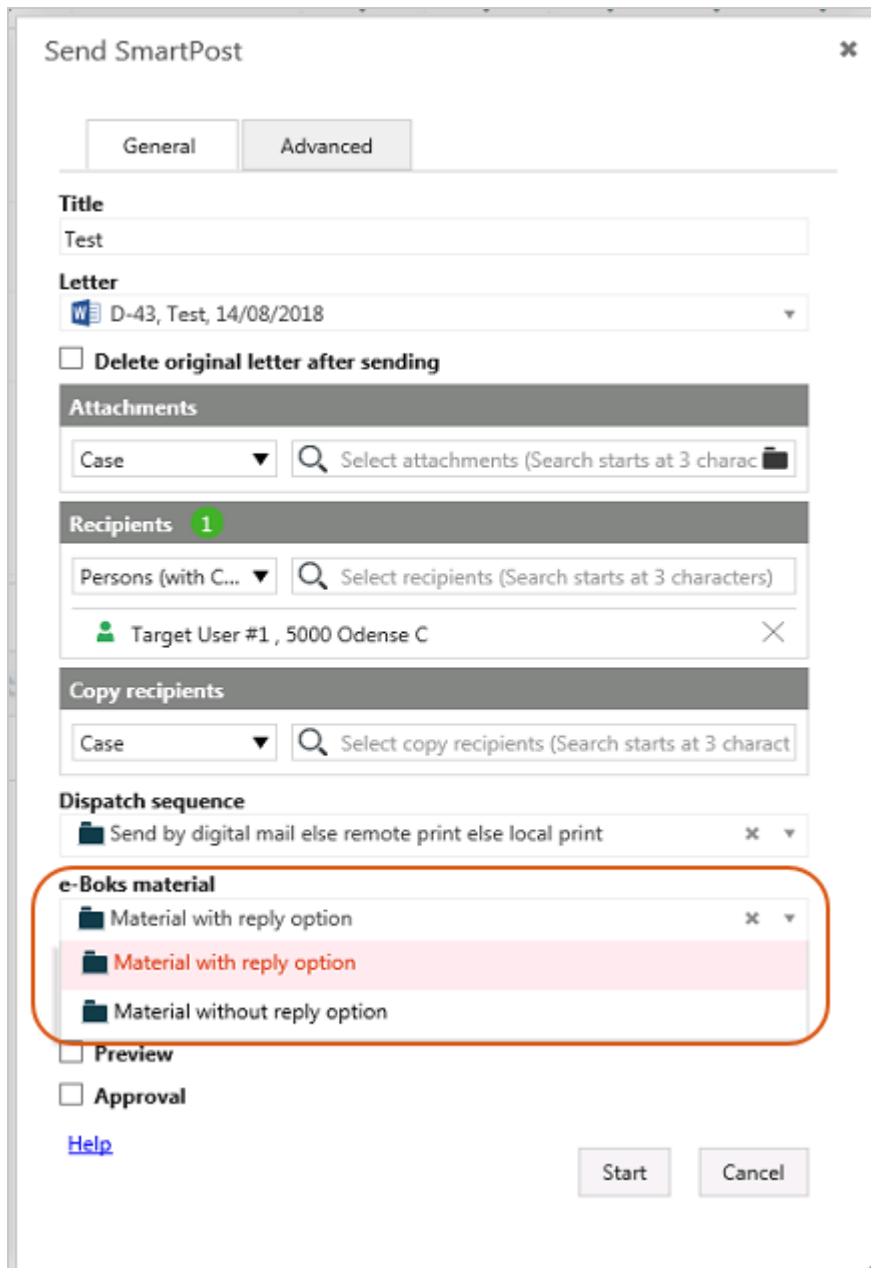



With the installation of SmartPost, two e-Boks materials are created by default in WorkZone Configurator:


- **Material without reply option**
- **Material with reply option**

You can edit the default materials to suit your organization's setup or create your own materials.

Materials are created in the e-Boks administration portal, and you have the e-Boks material IDs.


1. In WorkZone Configurator, click **Process**.
2. Click **e-Boks materials**.
3. Point to  next to the default material, **Material without reply option** or **Material with reply option**, you want to use. Click  **Edit**, and enter the e-Boks material ID that corresponds to the material you have created in the e-Boks Administration Portal.

- Or -

- Click  to create a new e-Boks material, enter a name for the material and the e-Boks material ID that corresponds to the material you have created in the e-Boks Administration Portal.
4. Fill in other settings that are relevant for your organization. See [Create an e-Boks material](#) in the WorkZone Configurator Administrator Guide for a description of each settings.
 5. Click **Save** to save changes you made to existing materials or **Create** to create a new material.

Set up a default e-Boks material

You can specify a default material that will be preselected in the **Send SmartPost** dialog box.

1. Open WorkZone Configurator, and click **Process > Processes**.
2. Point to the SmartPost process, and click  **Edit process parameters**.
3. In the **DefaultMaterialID** field, select the material you want to display as default in the **Send SmartPost** dialog box.

Configure print types

A print type is a predefined configuration of how Strålfors or OneTooX print and handle a dispatch. For example, a print type defines the size of the page and envelope, A or B mail, single-sided or double-sided, and so on.


Print types in the SmartPost package



By default, the SmartPost package includes 9 print types as shown below. The print types are ordered according to the values in the **Order** column, and they are displayed in this order in the **Send SmartPost** dialog box. You can use the print types as they are, modify the naming and the configurations to match your organization, or you can create new print types.

	<i>Name (da-DK)</i>	<i>Name (en-GB)</i>	<i>Order</i>
	Standardpost - sort/hvid	Standard mail - black/white	1
	Standardpost - farve	Standard mail - color	2
	Standardpost - farve - enkeltsidet	Standard mail - color - single - sided	3
	Hastepost - sort / hvid	Urgent mail - black / white	4
	Hastepost - farve	Urgent mail - color	5
	Hastepost - farve - enkeltsidet	Urgent mail - color - single-sided	6
	Anbefalet post	Registered mail	7
	Anbefalet post med kvittering	Registered mail with receipt	8
	Forkyndt post	Served mail	9

Create or modify print types

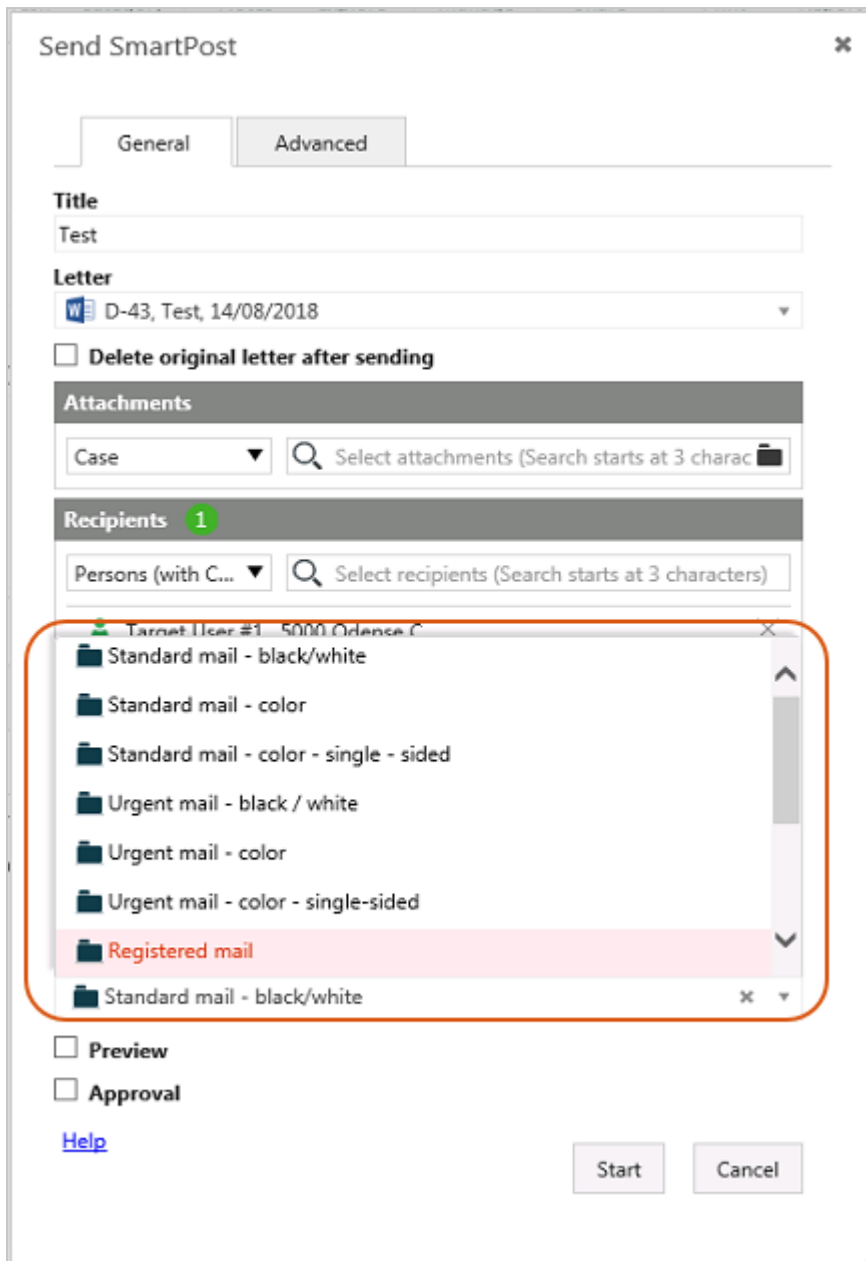
You create and configure print types in WorkZone Configurator. The print types that you create are listed in the **Print type** field in the **Send SmartPost** dialog box.



1. In WorkZone Configurator, click **Process**
2. Click **Print types**.
3. Point to  next to the print type that you want to use, for example, **Standard mail - color**, and click  **Edit**. Change the values so that they match your organization. For example, you can change the names you want to display to the users in the **Localize name** fields, and you can change the order in the **Order** field.



- Or -



Click  to create a new print type. In the **Create print type** dialog box, enter a name for the print type, and fill in other settings that are relevant for your organization. See [Create print types](#) in the WorkZone Configurator Administrator Guide for a description of each setting.

If you created a new dispatcher, the next step is to set up the print type parameters.

Edit print type parameters


1. Point to  and click  **Edit print type parameters**.
2. Fill in the values for the parameters. The table below describes the parameters and the dispatcher type they apply to.

Name	Description	Dispatcher type
PortoCategoryKey	Specify the postage category.	Strålfors
ReturnedLetter HandlingKey	Specifies how Strålfors handles letters that are returned to Strålfors in case PostNord has not been able to deliver the letter. If you select true , Strålfors destroys the letter. If you select false , Strålfors performs no action.	Strålfors
UrgencyLevelkey	Specify the level of urgency.	Strålfors
Simple/DuplexKey	Specify whether to print the letter single-sided or double-sided.	Strålfors
PrintColorOptionKey	Specify black/white or color print.	Strålfors
EnvelopeTypeKey	Specify the size of the envelope.	Strålfors
DocumentType	Enter the name of the OneTooX document type that you have received from KMD Printcenter.	OneTooX
AddReturnAddress	Select if you want to add a return address to the document before sending it. The return address is taken	OneTooX

Name	Description	Dispatcher type
	from the OneTooX system key that you have received from KMD Printcenter	
MailPriority	Select the mail priority, Quick letter (A Prioritaire) or Ordinary letter (B Economique).	OneTooX

Set up a default print type

You can specify a default print type that will be preselected in the **Send SmartPost** dialog box.

1. Open WorkZone Configurator, and click **Process > Processes**.
2. Point to the SmartPost process, and click  **Edit process parameters**.
3. In the **DefaultRemotePrintypeID** field, select the print type you want to display as default in the **Send SmartPost** dialog box.

Configure templates

The SmartPost package includes two default templates:

- Cover pages for recipients with protected addresses
- Cover pages for copy recipients


An organization can create and configure its own templates.

Cover page templates

The cover page is inserted at the beginning of the message that is sent to a recipient. The cover page must have a layout and content that can be used when the message is sent as a physical letter. For example, the recipient's name and address must be located at a specific position on the cover page in order to be visible through the window of the envelope, and no confidential information must be exposed.

Important: You must use content controls to create the cover pages in the same way as for the main letter in SmartPost.

The diagram below illustrates how SmartPost creates the cover page based on the cover page template. The cover page is merged at the same time as the rest of the message is merged.

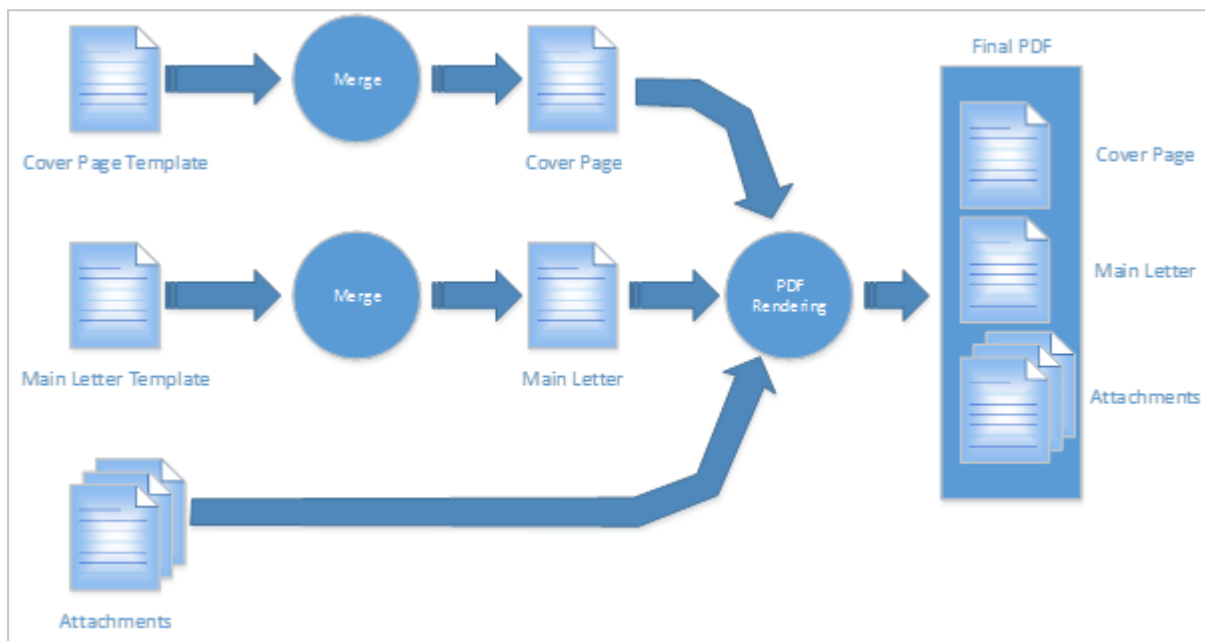

The protected address cover page

When a recipient has a protected address, SmartPost inserts a protected address cover page as the first page of the message to the recipient.

The main letter document is then merged, but the information required to locate the recipient is left out. SmartPost does this by leaving the content controls that contain address information empty.

The reason for also leaving out the address information in the letter to the recipient is to minimize the risk of recipients questioning if the letters that are sent to the copy recipients provide information that makes it possible to locate the recipient.

If the address is protected, the following address information is left out:

Case parties

The contacts that are registered as parties on the case that a SmartPost message is sent from.

- Address 1
- Address 2
- Address 3
- Contact code
- Contact number
- Contact number (code)
- Country code
- Country (text)
- Country (name)
- E-mail
- Fax
- Postcode
- Mobile phone
- Postcode (code)
- Postcode (text)
- Post district

Document contacts

The contacts that a user selects as recipients and copy recipients in the **Send SmartPost** dialog box as well as the sender, who is the process owner.

- Postcode
- Address 1
- Address 2
- Address 3
- Fax
- Country name
- Country
- Country
- Contact number

- Email
- Contact code
- Mobile phone
- Phone
- Postcode (code)
- Postcode (text)
- Post district

Important: If custom fields have been added on contacts, WorkZone cannot know if the fields are protected.

Example: Default protected cover page

 |



Ang. sag: 23. maj 2017
J.nr.

De modtager dette brev, som hovedmodtager.
Da Deres adresse er beskyttet, vil <firmanavn> hermed forsikre Dem om, at eventuelle kopimodtagere IKKE vil modtage Deres adresse på de tilsendte kopier.

Såfremt de skulle have modtaget dette brev ved en fejl, bedes De destruere brevet og underrette <firmanavn> derom.

Venlig hilsen

<Firmanavn>
<Gadenavn og nummer>
Postboks <Postboksnr.>
1323 København K

Tlf.nr. +45 <Telefonnr.>
Fax +45 <Telefonnr.>

<E-mail>
<Hjemmeside>

EAN-nr:
<EAN-nr.>

Åbningstider:
<Dage og tidspunkter>

If you have turned on the **AllowSendingSeparateDocuments** parameter in the SmartPost parameters to allow users to send attachments as separate PDF documents through e-Boks, and you have turned off the **MergeAllDocuments** parameter, the messages will not include a pro-

tected address cover page. Any copy recipients will still receive one merged PDF document including the cover page.

The Copy Recipient Cover Page

When a contact is selected as a copy recipient of a message, SmartPost inserts a copy recipients cover page as the first page in the message to the copy recipient. The main letter is then merged. If the main recipient has a protected address, the merge is then made without the address information, which can be used to locate the main recipient. As for the protected address cover page, the address information is left out (see above). If the main recipient does not have a protected address, SmartPost uses the whole address information of the main recipient when merging the main letter.

Example: Default copy recipient cover page

Development Citizen #2. ÅæøÀÆØ
Vej 2
5000



Ang. sag: SmartPost-sag

30. May 2017
J.nr. 17-69/1

Da De er part i ovenstående sag, modtager De hermed kopi af vedhæftede brev.

<Firmanavn>
<Gadenavn og nummer>
Postboks <Postboksnr.>
1323 København K

Såfremt de skulle have modtaget dette brev ved en fejl, bedes De destruere brevet og underrette <Firmanavn> derom.

Tlf.nr. +45 <Telefonnr.>
Fax +45 <Telefonnr.>

Venlig hilsen
Test Administrator, TESTADMIN

<E-mail>
<Hjemmeside>


EAN-nr:
<EAN-nr.>

Åbningstider:
<Dage og tidspunkter>

Create a cover page template

1. Use Microsoft Word to create a template. The template document must be of the type docx or dotx. Insert content controls that correspond to the address information (or other variable information) at the correct positions in the document. Ensure that the address information is located in the right position on the page to make it visible for the postal worker through the window of the envelope.

Strålfors provides an online test application (connect2.popwatch.com), which can be used to verify that the address information is located in the correct position.

2. Import the templates to a case in WorkZone using WorkZone Client. Typically, you have a specific case for template documents. After importing the templates, note the document number and name of the imported template document.
3. Open WorkZone Configurator.
4. Click **Process > Processes**.
5. Point to the **SmartPost** process, and click  **Edit parameters**.
6. Select the template document for each of the parameters:
 - **CopyCoverPageRecordId** - The copy recipient cover page.
 - **ProtectedCoverPageRecordId** - The protected cover page.
6. Click **Save**. The SmartPost process will take the cover page templates in to use immediately.

For more information about how to configure WorkZone Process parameters, see [Processes](#) in the WorkZone Configurator Administrator Guide.

Update templates with Captia content controls

Captia content controls are not supported in WorkZone. To make templates with Captia content controls work, you need to replace the Captia content controls with WorkZone

content controls. See [Check for Captia content controls](#) in the WorkZone for Office User Guide.

Configure standard letters

An organization may have standard letters that they want users to be able to include in SmartPost messages. A standard letter is a letter with predefined content that the user does not need to change before sending a message. The standard letter must be a Word document (docx or docm) or a Word template (dotx or dotm).

To make standard letters available to users in the **Send SmartPost** dialog box, you need to complete the following steps:


- Make sure that you have the **TEMPLATEADM** access code assigned.
- Create a specific case to hold the standard letter documents and assign the case group named **TEMPLATES** to it.
- Enter the case number of the case in the SmartPost process settings.

Create a case for standard letters


The **TEMPLATEADM** access code.

1. In WorkZone Client, create a case to hold the standard letters.
2. Assign the case group named **TEMPLATES** to the case.
3. Add the standard letter documents to the case.

Configure standard letters

1. In WorkZone Configurator, click **Process**.
2. Click **Processes**.
3. Point to the **SmartPost** process. A menu bar appears.
4. Click  **Edit process parameters** .
5. In the **Edit process parameters** dialog box, select the case that contains the standard letters in the **StandardLetterFileNo** parameter.

When the setup is complete, the users will see a **Standard letter** option and a list of standard letters in the **Send SmartPost** dialog box.

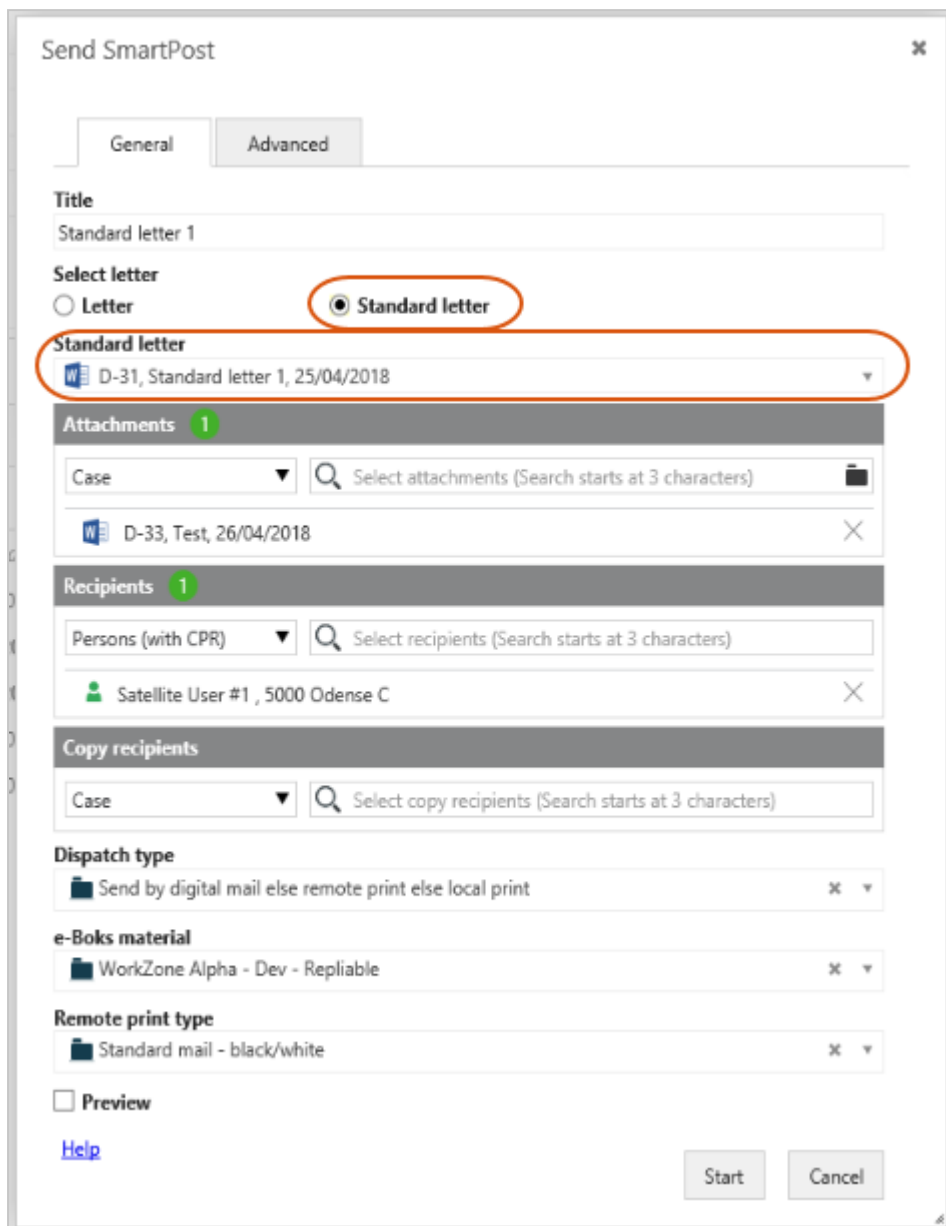

Configure SmartPost and GDPR classification

You can configure SmartPost so that it supports the European Union's General Data Protection Regulation (GDPR). For SmartPost, it means that you can define which documents are allowed to send through SmartPost based on the classification of the documents. If GDPR support is configured, users will only be able to select documents in the **Send SmartPost** dialog box that comply with a maximum classification level.

You define classification levels by specifying a rank for each document classification in WorkZone, and then configure a maximum document classification rank that defines that

only documents with the specified maximum rank or lower can be sent. Documents with higher classification ranks than specified for this parameter are not available for selection in the **Send SmartPost** dialog box.

If users start the SmartPost process from a document, which does not comply with the defined maximum rank, the document will not be preselected in the **Letter** field in the **Send SmartPost** dialog box.

It is not possible to include documents without classifications and documents with classifications but no rank in a SmartPost message. An error will be shown and it is not possible to start the SmartPost process.

When SmartPost merges the documents into the message that will be sent to the recipients, the merged PDF document gets the classification that corresponds to the aggregated classification based on the ranks of the selected documents (the letter and attachments). It means that the message gets the same classification as the document with the highest confidentiality level (the highest rank). The history document gets the same classification as the message.

Example

An organization has created five document classifications with the ranks 1-5 where documents with the highest confidentiality level have the highest classification *Confidential* which has the rank 5. The maximum classification rank (the threshold) is set to 3.

The document classifications as configured in WorkZone Configurator:

Code	Label (da-DK)	Label (en-GB)	Rank	Start date	End date	System
NOTCLASS	Ikke klassificeret	Not classified	1			No
PUBLIC	Offentlig	Public	2			No
INTERNAL	Intern	Internal	3			No
PERSONAL	Personfølsom	Personal	4			No
CONFIDNT	Fortrolig	Confidential	5			No

A user has a case with 6 documents with different classifications:

	<input type="checkbox"/>	Title	Docu...	Letter date	Document type	Reply de...	Classification
1	<input checked="" type="checkbox"/>	Letter - Public	46	14/02/2019	DOK, Document		PUBLIC, Public
2	<input type="checkbox"/>	Document - Public	49	14/02/2019	DOK, Document		PUBLIC, Public
3	<input type="checkbox"/>	Document - Personal	52	15/02/2019	DOK, Document		PERSONAL, Personal
4	<input type="checkbox"/>	Document - Not classified	47	14/02/2019	DOK, Document		NOTCLASS, Not classified
5	<input type="checkbox"/>	Document - Internal	48	14/02/2019	DOK, Document		INTERNAL, Internal
6	<input type="checkbox"/>	Document - Confidential	53	14/02/2019	DOK, Document		CONFIDENT, Confidential

When the user starts a SmartPost process, only the documents with classification ranks below or equal to 3 (Internal) will be available for selection:

Send SmartPost ✕

General Advanced

Title

Letter

Case

Copy recipients

Case

The user adds all 4 documents to the SmartPost message, a letter document and three attachments. The SmartPost message and the history document get the classification *Internal* with rank 3.

Configure GDPR classification support

To configure GDPR support for SmartPost, make sure that:


- Documents have a classification.

As of WorkZone Client 2017 SP1 this is a required field for all documents. For documents that are created with earlier releases, the documentation classification must be set manually. See [Document classification](#) in the WorkZone Configurator Administrator Guide.

- Document classifications are ranked.
- A document classification threshold is defined.


You configure the ranking and threshold in WorkZone Configurator.

Rank document classifications

1. In WorkZone Configurator, go to **Document > Document classification**.
2. Click  **Edit**.
3. Enter a rank for each classification.

If a document classification does not have a rank, users will not be able to select documents with this classification in the **Send SmartPost** dialog box.

Define a document classification threshold

1. In WorkZone Configurator, go to **Process > Processes**.
2. Point to the **SmartPost** process.
3. Click  **Edit process parameters**.
4. In the **DocClassificationThreshold** field, enter the document classification rank corresponding to the maximum classification level you want to use with SmartPost. See DocClassificationThresHold.

By default, the **DocClassificationThreshold** field is empty, which means that all documents can be selected and sent in SmartPost messages.

Use SmartPost without GDPR support

If you want to use SmartPost without the GDPR support, which means that all documents will be available for selection in the **Send SmartPost** dialog box, do not specify a classification rank in **DocClassificationThreshold** field.

Configure allowed documents

You can configure which documents that users are allowed to select in the **Send SmartPost** dialog box based on a custom field and its values. If you have configured allowed documents, users will only be able to select the documents with the allowed values from the droplists in the **Letter** and the **Attachments** fields in the **Send SmartPost** dialog box.

Example:

An organization has marked their documents with different levels depending on the confidentiality of the documents. For this purpose, they have created a custom field named **Document level** that contains a droplist with the values **1**, **2**, **3**, **4**, and **Not specified**. The **Document level** field has been added to the document detail page in WorkZone Client. The employees are only allowed to send documents with level **4** and **Not specified** using SmartPost, which means that only documents with these levels are shown in the droplists for the **Letter** and **Attachments** fields in the **Send SmartPost** dialog box.

You configure which documents are allowed by configuring the **ValidationProperty** and the **ValidationValues** parameters in the SmartPost process parameters. In the above example, the **ValidationProperty** parameter must be set to the custom field **Document level** and the **ValidationValues** parameter must be set to the values **4** and **Not specified**.

Configure allowed documents

Prerequisites:

- A custom field of the type **Droplist**. The **Droplist** type allows you to add multiple values.

See [Custom fields](#) in the WorkZone Configurator Administrator Guide.

- A custom droplist that contains values for the documents.
See [Custom droplists](#) in the WorkZone Configurator Administrator Guide.
- The custom field is added to the document detail page in WorkZone Client.
See [Configure detail pages](#) in the WorkZone Client Administrator Guide.

1. In WorkZone Configurator, click **Process**.
2. Click **Processes**.
3. Point to the **SmartPost** process. A menu bar appears.
4. In the **Edit process parameters** dialog box, select the custom field that you want to validate against in the **ValidationProperty** parameter.
5. Select allowed values in the **ValidationValues** parameter.

When the setup is complete, the users will only see the allowed documents when they click in the **Letter** and **Attachments** fields in the **Send SmartPost** dialog box.

Send SmartPost

General Advanced

Title
Letter

Letter
D-46, Letter, 23/11/2018

Delete original letter after sending

Attachments 1
Case Select attachments (Search starts at 3 characters)
D-49, Attachment, 23/11/2018

Recipients 1
Persons (with CPR) Select recipients (Search starts at 3 characters)
Target User #1, Vej 1, 5000 Odense C

Copy recipients
Case Select copy recipients (Search starts at 3 characters)

Dispatch sequence
Send by digital mail else remote print else local print

e-Boks material
Material with reply option

Print type
Standard mail - black/white

Preview
 Approval

Approval deadline
26/11/2018 11:03

[Help](#)

Start Cancel

If the custom field is empty, the document will be considered as allowed.

Send messages status

SmartPost monitors all outgoing messages to ensure that the messages reach the recipients.

- Continuous status requests
- Time based monitoring

Continuous status requests

The monitoring is implemented differently depending on the selected provider, e-Boks or Strålfors.

e-Boks

SmartPost transfers messages to e-Boks and receives a reply immediately as part of the transaction. According to e-Boks, a positive reply is sufficient to accept that the message is received by the end user, as long as the messages is sent as a planned immediate delivery.

SmartPost reads the reply and determines based on the content whether the sending is successful or not. SmartPost does not request the status of the messages later.

Through the REST interface to e-Boks, it is possible to send messages that will be delivered at a specific time. The concept "immediate delivery" means that SmartPost requests that e-Boks delivers the message in the end user's inbox immediately.

Strålfors

When SmartPost transfers messages to Strålfors, it continually requests the status of messages. When SmartPost receives a status from Strålfors, which indicates that the message has been correctly received and handled, SmartPost assumes that the message is delivered.

Time based monitoring

When the user selects how to send a message (digital post, remote print, or local print), SmartPost estimates a deadline for when a the messages can be delivered.

If SmartPost does not assume that the messages have been delivered by the deadline, an email is sent to the user notifying the user that the deadline is exceeded. The user can then choose to extend the deadline, in which case the deadline will be extended by 2 hours, or cancel the dispatch. In the case of canceling a dispatch, SmartPost stops attempting to send the messages again. In this case, some of the messages may be sent correctly whereas others may be outstanding or not sent at all. SmartPost will try to clean this up.

Dispatch information

During the sending of messages, miscellaneous information is added to the generated PDF documents. This information allows you to extract documents that are sent through the SmartPost process based on different criteria. The information is added to the documents as free information.

Dispatch role (SHIP_ROLE)

Information about the dispatch role is added to documents during generation of the PDF documents before they are sent to end users. The role can be either recipient or copy recipient.

You can, for example, use this information to get statistics on how many documents have been sent to the main recipients compared with the number of documents sent to the copy recipients.

Document size (PDF_SIZE)

Information about document size is added to documents during the generation of the PDF documents before they are sent to end users. The information tells you the size of the PDF document in number of bytes (integer).

You can, for example, use this information to get statistics on size of the documents that are sent through SmartPost or on how much data is sent through SmartPost during a specific period of time.

Number of documents (PDF_COUNT)

Information about number of documents is added to documents during the generation of the PDF documents before they are sent to end users. The information tells you the number of generated PDF documents. This number corresponds to the total number of recipients and copy recipients that are part of a dispatch.

You can, for example, use this information to get statistics on the number of recipients by each SmartPost dispatch.

Dispatch date (SPSHIPPED)

Information about dispatch date is added to documents during the generation of the PDF documents before they are sent to end users.

As regards documents that are sent to local print, the value is added to the document when the document is sent as an email to the user.

As regards documents that are sent using other dispatch types (digital post or remote print), the value is added when SmartPost has verified that the document is sent to the service provider.

The dispatch date is the current date (excluding the time), and it is written as free date information.

You can, for example, use this information to narrow SmartPost queries to return results within a specific period of time.

Final dispatch type (CHANNEL)

Information about the final dispatch type is added to documents that are to be sent every time SmartPost decides to try out a new type of dispatch. It happens, for example, when SmartPost tries to send a dispatch through digital mail but then has to choose another dispatcher if the dispatch is rejected by the service provider.

When the information is added to a document, it overwrites the previous value. This way, the value after the sending has been completed will always be the dispatch type that SmartPost uses to send the message.

You can, for example, use this information to determine how many documents have been sent using the various dispatch types during a specific period of time.

Remote print type (PRINT_TYPE)

Information is added to documents that are sent through SmartPost using remote print. The information will be available even if SmartPost does not succeed in sending the document to remote print and then has to choose a different dispatcher.

The information is the name of the print type that the user has selected in the **Send SmartPost** dialog box.

You can, for example, use this information to get statistics on the typical choices of print types.

Workflow instance ID (WFIID)

At the time of creation of the documents, this information is added to all documents that are generated by SmartPost. The information includes a GUID ([Globally Unique Identifier](#)) that identifies the WorkZone process that describes the current dispatch.

You can, for example, use the information if you suspect that something is wrong with a specific dispatch and you want to analyze the details of this dispatch.

Add the TLS 1.2 key to Registry (Windows Server 2008 R2)

For WorkZone Process to support TLS 1.2 on Windows Server 2008 R2, you need to:

- Make sure that the .NET Framework version is 4.7 or higher.
- Add the TLS key to Registry to enable a Windows Server 2008 R2 to negotiate TLS 1.2.

See also the Microsoft article [TLS/SSL Settings](#).

Change .Net framework version to 4.7

This procedure describes how to change the .NET Framework version to 4.7 on the servers that run WorkZone Process. This change makes the operating system able to negotiate the security protocol with remote servers.

1. Go to the folder named `%ProgramFiles(x86)%\KMD\WorkZone\Process\Web\Services` on all servers.
2. As administrator, open the file named `Web.config` in a text editor, for example Notepad.
3. Find the two nodes at the following XPath's:

```
configuration/system.web/compilation
configuration/system.web/httpRuntime
```

4. Change their values of their `targetFramework` attributes from 4.5 to 4.7.

```
<?xml version="1.0" encoding="UTF-8"?>
<configuration>
  <configSections>
    <sectionGroup name="applicationSettings" type-
e="System.Configuration.ApplicationSettingsGroup, System, Ver-
sion=4.0.0.0, Culture=neutral, PublicKeyToken=b77a5c561934e089">
      <section name-
e="Scanjour.Workflow4.Web.Services.Properties.Settings" type-
e="System.Configuration.ClientSettingsSection, System,
```

```

Version=4.0.0.0, Culture=neutral, PublicKeyToken=b77a5c561934e089"
requirePermission="false" />
    <section name="Scanjour.Workflow4.Host.Settings" type-
e="System.Configuration.ClientSettingsSection, System, Ver-
sion=4.0.0.0, Culture=neutral, PublicKeyToken=b77a5c561934e089"
requirePermission="false" />
    </sectionGroup>
</configSections>
<appSettings>
    <add key="aspnet:UseTaskFriendlySynchronizationContext" value-
e="true" />
</appSettings>
<!-- Web.http.config from Workflow4.Web.Services-->
<!-- Enable Fiddler tracing using reverse proxy -->
<!--<system.net>
    <defaultProxy>
        <proxy bypassonlocal="False" usesystemdefault="True" prox
address="http://127.0.0.1:8888" />
    </defaultProxy>
</system.net-->
<system.web>
    <compilation debug="true" targetFramework="4.5" />
    <httpRuntime targetFramework="4.5" />
    <identity impersonate="false" />
</system.web>
...
</configuration>

```

5. Save the changes and close the editor.
6. From a command prompt having administrator permissions, run an IISRESET.

Add TLS 1.2 key to Registry

You must execute the procedure for all servers that run WorkZone Process. The procedure shows how to enable a Windows Server 2018 R2 to negotiate TLS 1.2.

You can also run a script that automatically executes the procedure. See Script for adding the TLS key to Registry.

1. Open the Windows Registry Editor as an administrator.

Open a command prompt as an administrator and run the **regedit** command.


2. In the registry, add a **TLS 1.2** node to the registry folder at the following path:

```
HKLM SYSTEM\CurrentControlSet\Control\SecurityProviders\SCHANNEL\Protocols
```

where **HKLM SYSTEM** means **HKEY_LOCAL_MACHINE\System**.

3. Below the node that you created in step 2, create an additional node named **Client**.
4. Below the **Client** node, add a new **DWORD** entry by the name **DisabledByDefault**, and specify the value **0**. This will include TLS 1.2 in the negotiation.
5. Below the **Client** node add a new **DWORD** entry by the name **Enabled** and specify the value **1**. This will enable TLS 1.2 on the client site.
6. Exit the registry editor.

7. From a command prompt having administrator permissions, run an IISRESET.

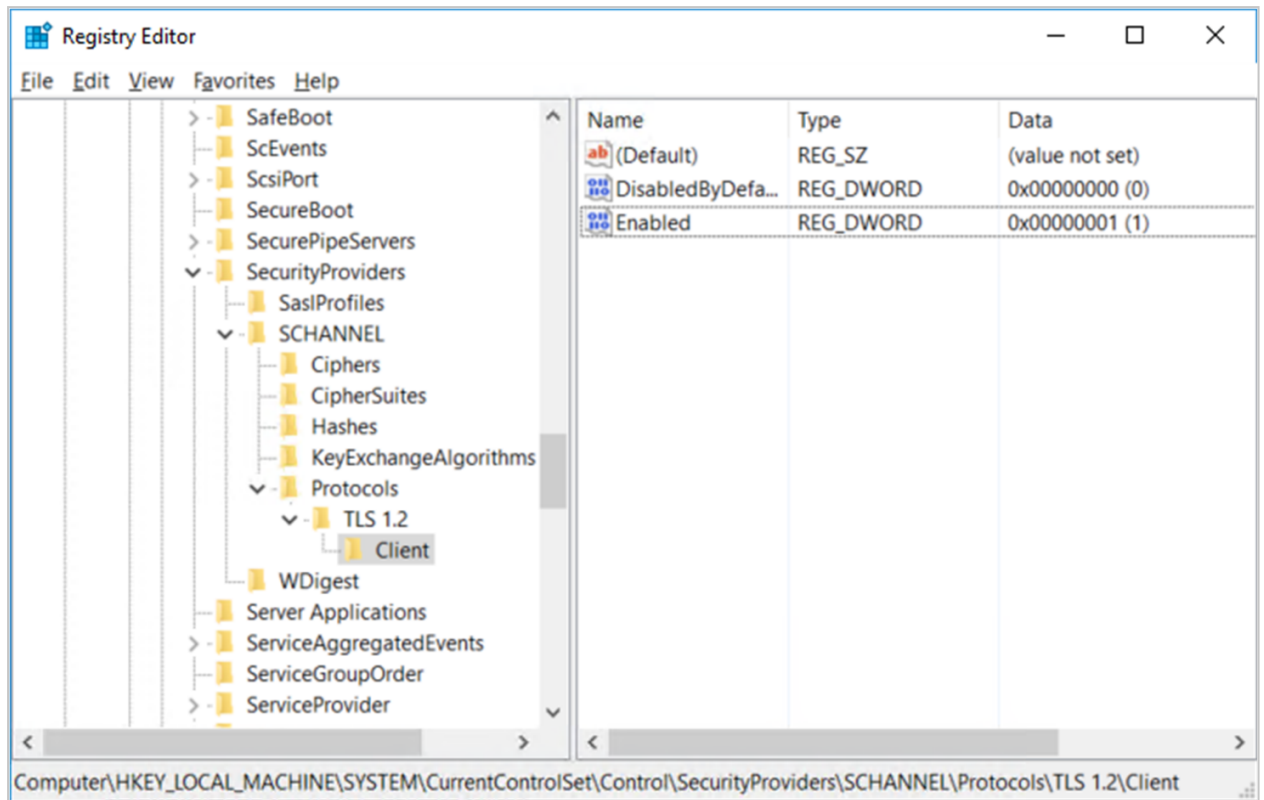

Script for adding the TLS key to Registry

```
[CmdLetBinding()]
Param
(
    [parameter(Mandatory = $False)]
    [string] $registrypath = "HKLM:\SYSTEM\CurrentControlSet\Control\SecurityProviders\SCHANNEL\Protocols"
)

if(!(Test-Path $registrypath))
{
    Write-Warning "The registry path ($($registrypath)) does not exist"
}
else
{
```

```
$folderpath = "TLS 1.2\Client"
$fullpath = Join-Path -Path $regitrypath -ChildPath $folder-
path
if(!(Test-Path $fullpath))
{
    Set-Location $regitrypath
    New-Item -Path $folderpath -Force | Out-Null
}

New-ItemProperty -Path $fullpath -Name "DisabledByDefault" -
Value "0" -PropertyType DWORD -Force | Out-Null
New-ItemProperty -Path $fullpath -Name "Enabled" -Value "1"
-PropertyType DWORD -Force | Out-Null
}

# SIG # Begin signature block
#
MIIX8wYJKoZIhvcNAQcCoIIX5DCCF+ACAQEEdzANBglghkgBZQMEAgEFADB5Bgor
#
BgEEAYI3AgEEOGswaTA0BgorBgEEAYI3AgEeMCYCAwEAAAQQUH8w7YF1LCE63JNLG
#
KX7zUQIBAAIBAAIBAAIBADAxMA0GCWCGSAFlAwQCAQUABCAzuixBH23nUd6p
# 6hMoe-
jg+WS7EOjFmdICZp/a3I1sEA6CCEvQwggPuMIIDV6ADAgECAhB+k+v7fMZ0
#
WepLmnfUBvw7MA0GCSqGSib3DQEBBQUAMIGLMQswCQYDVQQGEwJaQTEVMBMGA1UE
# CBMMV2VzdGVy-
biBDYXB1MRQwEgYDVQQHEwtEdXJiYW52aWxsZTEPMA0GA1UEChMG
#
VGhhd3R1MR0wGwYDVQQLEExRUaGF3dGUgQ2VydG1maWNhdGlvbjeFMB0GA1UEAxMw
# VGh-
hd3R1IFRpbWVzdGFtcGluZyBDQTAeFw0xMjE5MjEwMDAwMDBaFw0yMDEyMzAy
```


MzU5NTlaMF4xCzAJBgNVBAYTA1VTMR0wGwYDVQQKEXRTeW1hbnRlYyBDb3Jwb3Jh
dGlvbjEwMC4GA1UEAxMnU3ltYW50ZWMgVGlzSBTdGFtcGluZyBTZXJ2aWNlcyBD
QSAIEcyMIIBIjANBgkqhkiG9w0BAQEFAAOCAQ8AMIIBCgKCAQEAsayzSVRLlXwS
CtgleZEiVypv3LgmXENza8K/LlBa+xTCdo5DASVDtKHirFtot3vDdMwi17SUAAL3
Te2/tLdEJGvNX0U70UTOQxJzF4KLabQry5kerHIbJk1xH7Ex3ftRYQJTpqr1SSwF
eEWlL4n055nn/ozivz89xpLcSvh7M+R5CvwdYhBnP/FA1GZqtdsn5Nph2Upg4XC
YBTEyMk7FNrAgfAfDXTekiKryvf7dHwn5vdKG3+nw54trorqpuaqJxZ9YfeYcRG8
4lChS+Vd+uUOpyyfqmUg09iW6Mh8pU5IRP8Z4kQHkgvXaISAXWp4ZEXNYEZ+VMET
fMV58cnBcQIDAQABo4H6MIH3MB0GA1UdDgQWBRRfmvVuXmzMDJrU3X3vP9vsTIAu
3TAyBggrBgEFBQcBAQQmMCQwIgwYIKwYBBQUHMAGGFmh0dHA6Ly9vY3NwLnRoYXN0d0
ZS5jb20wEgYDVR0TAQH/BAGwBgEB/wIBADA/BgNVHR8EODA2MDSGmQAwHi5odHRw
Oi8vY3JsLnRoYXN0d0ZS5jb20vVGhhd3RlVGltZXR0YXN0d0EuY3JsMBMGA1Ud
JQOMMAoGCCsGAQUFBwMIMA4GA1UdDwEB/wQEAwIBBjAoBgNVHREEITAfP0wGzEZ
MBcGA1UEAxMQVGlzZVN0YW1wLTIwNDgtMTANBgkqhkiG9w0BAQUFAAOBgQADCZuP
ee9/WTCq72i1+uMJHbtPggZdN1+mUp8Wjeockglebvvt61h8MOj5aY0jCwsSb0ep
rjKR+Cqxm7Aaw47rWZYArc4MTbLQMaYIXCp6/OJ6HVdMqGUY6XlAYiWWbsfHN2qD
IQiOQerd2Vc/HXdJhyoWBl6mOGoiEqNRGYN+tjCCBKMwggOLOAMCAQICEA7P9DjI
/r81bgTYapgbGlAwDQYJKoZIhvcNAQEFBQAwXjELMAkGA1UEBhMCVVMxHTAbBgNV
BAAoTFFN5bWFudGVjIENvcnBvcnF0aW9uMTAwLgYDVQQDEydTeW1hbnRlYyBUaW1l
IFN0YW1wW5nIFNlcnZpY2VzIENBIC0grZiWHhcNMTIxMDE4MDAwMDAwWhcNMjAx
MjI5MjM1OTU5WjBiMQswCQYDVQQGEwJVUzEdMBSGA1UEChMUU3ltYW50ZWMgQ29y
cG9yYXRpb24xNDAYBgNVBAMTK1N5bWFudGVjIFRpbWUgU3RhbXBpbcU2Vydm1j
ZXMGU2lnbmVyIC0grZiWwgEiMA0GCSqGSIb3DQEBAQUAA4IBDwAwggEKAoIBAQC
Yws5RLi7I6dESbsO/6HwYQpTk7CY260sD0rFbv+GPFNVdXxOBD8r/amWltn+YXkL
W8lMhnb14ENLIpXuwitDwZ/YaLSOQE/uhTi5EcUj8mRY8BUyb05Xoa6IpALXKh7N
S+HdY9UXiTJbsF6ZWqidKFAOF+6W22E7RVEDzxJWC5JH/Kuu9mY9R6xwcueS51/N
ELnEg2SUGb0lgOHO0iKl0LoCeqF3k1tlw+4XdLxBhircCEyMkoyRLZ53RB9o1qh0
d9sOWzKLVoszvd1jyEmdOsXF6jML0vGjG/SLvtmzV4s73gSneiKyJK4ux3DFvk6D
Jgj7C72pT5kI4RAocqrNAGMBAAGjggFXMIIBUzAMBgNVHRMBAf8EAjAAMBYGA1Ud
JQEB/wQMMAoGCCsGAQUFBwMIMA4GA1UdDwEB/wQEAwIHgDBzBggrBgEFBQcBAQRn
MGUwKgYIKwYBBQUHMAGGHmh0dHA6Ly90cy1vY3NwLnRlZzLnN5bWFudGVjLmNvbTA3
BggrBgEFBQcAwAoYraHR0cDovL3RzLWFpYS53cy5zeW1hbnRlYy5jb20vdHNzLWNh
LWcyLmN1c2A8BgNVHR8ENTAzMDGgL6AthitodHRwOi8vdHMtY3JsLnRlZzLnN5bWFu
dGVjLmNvbS90c3MtY2EtZzIuY3JsMCGA1UdEQQhMB+kHTAbMRkwFwYDVQQDExBU
aW1lU3RhbXBAtMjA0OC0yMB0GA1UdDgQWBRRGxmMjDkoUHtVM2lJjFz9eNrwN5jAf
BgNVHSMEGDAWgBRfmvVuXmzMDJrU3X3vP9vsTIAu3TANBgkqhkiG9w0BAQUFAAO

AQEAeDu0kSoATPCPYjA3eKOEJwd-
vGLLeJdyg1JQDqoZ0JZ+aQAMc3c7jecshaAba

tjK0bb/0LCZjM+RjZG0N5sNnDvcFpDVsfIkWxumy37Lp3SDGcQ/NlXTctlzevTcf
Q3jmeLXNKAQgo6rxS8SIKZEogNER/Nlcd-
m5PXg5FRkFuDbDq0Jqx0toJcRD8HHm0

gHusafT9nLYMFivxf1sJPZtb4hbKE4FtAC44DagpjyzhsvRaqQGvFZwsL0kb2yK7
w/54lFHDhrGCiF3wPbRRoXkzKy57ud-
wgCRNx62oZW8/opTBXLilJP7nPf8m/PiJo

Y1OavWl0rMUdPH+S4MO8HNgeDTCBPowggPioAMCAQICECosGt9a2i8BRI6xcprE
e2IwDQYJKoZiHvcNAQELBQAw-
fzELMAkGA1UEBhMCMVVMxHTAbBgNVBAoTFFN5bWFu

dGVjIENvcnBvcnF0aW9uMR8wHQYDVQQLExZTEwbnRlYyBUcnVzdCBOZXR3b3Jr
MTAwLgYDVQQDEy-
dTeW1hbnRlYyBDdGFzcyAzIFNlQm92aW9uZ25pbmcg

Q0EwHhcNMTUxMTI0MDAwMDAwWhcNMTkwMjIxMjM1OTU5WjCBgDELMAkGA1UEBhMC
RESxEDAQBgNVBAgMB0Rl-
bm1hcmsxETAPBgNVBAcMCEJhbGxlcjVwMRAwDgYDVQQK

DAdLTUQgQS9TMSgwJgYDVQLDB9JbmRlbnRpdHkgYW5kIEFjY2VzcyBNYW5hZ2Vt

ZW50MRAwDgYDVQDDAdLTUQgQS9TMIIBIjANBgkqhkiG9w0BAQEFAAOCAQ8AMIIB
CgKCAQEAs-
gRBUFZONlHWmOzshOjxYfNEGadTueN21GKzUrfpK2ndwalttZC+PHrc

TS/QQz2cPTxR8+hJXZ9MwoQQeBxcsiQm8Tsfh5t4iM5ZfpUeNO6MtRyREB34Sxp3
FVwg-
bH7MxXU7q8tqQTtHF9ED4ArGJ5fDYParDulrWmIvqKy7LlrK5E9rQUidRwbF

fkqdFLbwPLrSdVuJfhHdN81JVdh+yK0xhDOzuKnrmihSDYlaew4dIDixBSlPtllP
27YLC-
sMESHQ1FW2rEVPztFru07kifmtFAY+UZZq8LkIJ6w9KSzvCXsd4kYn/kthY

vsrCGNAye0Ru6uFylEJoRTP5qDKJpQIDAQABo4IBbjCCAWowCQYDVR0TBAIwADA0
BgNVHQ8BAf8EBAMCB4AwEwYDVR0lBAwwCgYIKwYBBQUHAwMwZgYDVR0gBF8wXTBb
BgtghkgBhvHFAQcXAZBMMCMGCCsGAQUFBwIBFhdodHRwczovL2Quc3ltY2IuY29t
L2NwczAlBggrBgEFBQcCAjAZGhdodHRwczovL2Quc3ltY2IuY29tL3JwYTAfBgNV
HSMEGDAWgBSW01PweTOXR32D7y4rzMq3hh5yZjArBgNVHR8EJDAiMCCgHqAChhpo
dHRwOi8vc3Yuc3ltY2IuY29tL3N2LmNybDBXBggrBgEFBQcBAQRLMEkwHwYIKwYB
BQUHMAGGE2h0dHA6Ly9zdi5zeW1jZC5jb20wJgYIKwYBBQUHMAKGGmh0dHA6Ly9z
di5zeW1jYi5jb20vc3YuY3J0MBEGCWCsGAGG+EIBAQQEAWIEEDAWBgOrBgEEAYI3
AgEbBAgwBgEBAAEB/zANBghkiG9w0BAQsFAAOCAQEANkb2mS7my0HnBH4JqZeJ
ZOOWzp5Cg3bft9ZW2mCEy6SGW3CBzDTvNopp4UV5cBpHJhWAD0Indu1iPZ/dPhYw
bE8nYnC4bcNRqEKZ6JmZar+GQHnLUGvf4wL5f4jeWeXrTTe7WpM7EwJNSwz/gRa
RxclhCufPEemdBKVxaoPC+4xwFKOBSkJIOKmcZfzLA8IHfV7Fd0224qGKuk3EbXd
NL9WwTkiz/JFQiyk+eit8UcQ/hhUpyKM2PauB2aGHXXkMR/xQse9YGA5IY03Wb79
IJG8ibU+yRdDyoBJI448EFG4aL8TJPcpBXX9JZJ/mJUzzacl6ARMAHLWdW9/oSJ
CDCCBVkwggRBoAMCAQICED141/12SWCyYX308B7KHiowDQYJKoZIhvcNAQELBQAw
gcoxCzAJBgNVBAYTA1VTMRcwFQYDVQQKEw5WZXRJpU2lnbiwgSW5jLjEfmB0GA1UE
CxMwVmVyaVNpZ24gVHJlc3QgTmV0d29yazE6MDgGA1UECXMxKGMpIDIwMDYgVmVya
VNpZ24sIEluYy4gLSBGb3IgaG9yaXplZCB1c2Ugb25seTFFMEMGA1UEAxM8
VmVyaVNpZ24gQ2xhc3MgMyBQdWJsaWMgUHJpbWFyeSBdZXJ0aWZpY2F0aW9uIEF1
dGhvcml0eSAtIEc1MB4XDTEzMTIwMDAwMDAwMDFoXDTEzMTIwMDAwMDAwMDIwVowfzEL
MAkGA1UEBhMCVVMxHTAbBgNVBAoTFFN5bWFudGVjIENvcnBvcml0aW9uMR8wHQYD
VQQLExZTeW1hbRlYyBUcnVzdCBvZXN3b3JrMTAwLgYDVQQDEyZTeW1hbRlYyBD
bGFzcyAzIFNlI1NiBDb2RlIFNpZ25pbmcgQ0EwggeiMA0GCSqGSIb3DQEBAQUA
A4IBDwAwggEKAoIBAQCXg4AFq8ssdIIxNdok1FgHnH24ke021hNI2JqtL9aG1H3
ow0Yd2i72DarLyFQ2p7z518nTgvc18gJcJOp2lwnTqQNkaC07BTokXJULs6j20Tp
Uhs/QTzKSUsqwOg5q1PMIdDMz3+b5sLMWGqCFE49Ns8cxZCHJI7xe74xLT1u3LWZ
Qp9LYZVfHHDuF33bi+VhiXjHaBuvEXgamK7EVUd2bMy1qEORkDF15KK0VOnmVuF
NVft6pNiYSAKxzB3JBFNYo02untogjHuZcrf+dWNSjXcjCtvanJcYISc8gyUXsBW
UgBIzNP4pX3eL9cT5DiohNVGuBOGwhud6lo43ZvbAgMBAAGjggGDMIIBfzAvBggr
BgEFBQcBAQQjMCEwHwYIKwYBBQUHMAGGE2h0dHA6Ly9zdi5zeW1jYi5jb20wEgYD
VR0TAQH/BAGwBgEB/wIBADBsbGNVHSAEzTbjMGEgc2CGSAGG+EUBBxcDMFIwJgYI
KwYBBQUHAwEwGmh0dHA6Ly93d3cuc3ltYXV0aC5jb20vY3BzMCgGCCsGAQUFBwIC
MBwaGmh0dHA6Ly93d3cuc3ltYXV0aC5jb20vcnBhMDAGA1UdHwQpMCwJaAjocCGG
H2h0dHA6Ly9zMS5zeW1jYi5jb20vcnBhMDAGA1UdHwQpMCwJaAjocCGG
BQUHAwIGCCsGAQUFBwMDMA4GA1UdDwEB/wQEAWIBBjApBgNVHREEIjAgpB4wHDEa
MBGGA1UEAxMRU3ltYW50ZWNSQ0ktMS01NjcwHQYDVDR0OBByEFJY7U/B5M5evfYPv

LivMyreGHnJmMB8GA1UdIwQYMBaAFH/TZafC3ey78DAJ80M5+gKvMzEzMA0GCSqG
SIb3DQEBcWUAA4IBAQAthRoe-
aak396C9pK9+HWFT/p2MXgymdR54FyPd/ewaA1U5

+3GVx2Vap44w0kRaYdtwb9ohBcIuc7pJ8dGT/l3JzV4D4ImeP3Qe1/c4i6nWz7s1
LzNYqJJW0chNO4LmeYQW/Ci-
wsUfzHaI+7ofZpn+kVqU/rYQuKd58vKiqoz0EAeq6

k6IOUCIpF0yH5DoRX9akJYmbBWsvtMkBTCd7C6wZBSKgYBU/2sn7TUyP+3Jnd/0n
lMe6NQ6ISf6N/SivShK9DbOXbd5EDBX6NisD3MFQAFghEV0U5eK9J0tUvi-
uEXg+m

w3QFCu+Xw4kisR93873NQ9TxTKk/tYuEr2Ty0BQhMYIEVTCCBFECAQEwgZMwfzEL

MAkGA1UEBhMCMVVMxHTAbBgNVBAoTFFN5bWFudGVjIENvcnBvcmlF0aW9uMR8wHQYD
VQQLExZTeW1hb-
nRlYyBUcnVzdCBOZXR3b3JrMTAwLgYDVQQDEydTeW1hbRlYyBD

bGFzcyAzIFNIQTI1NiBDb2RlIFNpZ25pbmcgQ0ECECosGt9a2i8BRI6xcprEe2Iw
DQYJYIZIAWUDBAIBBQCg-
gYQwGAYKKwYBBAGCNwIBDDEKMAigAoAAoQKAADAZBgkq

hkiG9w0BCQMxDAYKKwYBBAGCNwIBBDACBgorBgEEAYI3AgELMQ4wDAYKKwYBBAGC
NwIBFTAxBgkqhkiG9w0BCQQxIggQgBuO9BF3DQJ9F40qrVRP-
jouKcDgu7D75w3c84

P3urgAQwDQYJKoZIhvcNAQEBBQAEggEAL3+7b4YyU9zIHT63pnCtLTn0HCEZLYMG
hf7rIspJ1bH1FfmMy1HycMYACger-
UwcVHXALJmI0LUaHc0Jclu8cnUM3qUSa4mFY

V9/bJ3l0NpgVrjFMGRQC6aPNxDRKL0LB4scNvPUdUWnMorvTDDPinMwv4h9PVa5d
s1Khguu31xMd-
nrQYFsnyI/X3dbEWOuyVhQfV0JfbdDaCxh07fHMsreggv7B1Uq7


1JrqJTFTFrUOLFJ+psPnYSqlgs0wBZlprktdotTr7Uk5CPzfFKCq5By9qOy8501Y

```
# rD15JkSybjUmLtpxpHtKU3QKlHSJJAl2XWOP5A+kcP0JiSziRH1S2qGCAGswggIH
# BgkqhkiG9w0BCQYxggH4MIIB9AIBATByMF4xCzAJBgNVBAYTAlVTMR0wGwYDVQQK
# ExRTEw1hbnRlYyBDb3Jwb3JhdGlvbjEwMC4GA1UEAxMnU3ltYW50ZWMgVGltZSBT
# dGFtcGluZyBTZXJ2aWNlcyBDQSAIEcyAhAoz/Q4yP6/NW4E2GqYGxpQMAkGBSsO
# AwIaBQCgXTAYBgkqhkiG9w0BCQMxCwYJKoZIhvcNAQcBMBwGCSqGSIb3DQEJBTEP
# Fw0xODExMDcwOTE1MzBaMCMGCSqGSIb3DQEJBDEWBQBQ1pPsl0B1ayBGbHbzPAIU/
# Z4R3LzANBgkqhkiG9w0BAQEFAASCAQBQr6j6MU+SOk8R0NNM7U2bXFEus/+j6NhI
# 1ICjrF4w0i893nktu9OiubZHP4lDqj04FJ6p4MLQ/71mEzpu4IX8RNdGW0pC/hi5
# quShoHcak4HAv4lrQDUUZzQjUbvHkahO2guca+AKGKZFMi78n0jt8S0ne82X3VU1
# LIGHSY9dZIM6YM0AcFS4i0U503YqS5hLb//Jqkhm02bQy96nyW8dJieBHMJH3Umi
# o1SFzx5E4MwwKpCuTJYkVZ5vE6Hc4oZA1akjBHMs28lt9V9Rni+zdq8HbrkOKrQZ
# 4EdJMdCsY7g+JSDC3Kr6hFsw63Qa+xUcRYHOpYZ0dSrfIHner301
# SIG # End signature block
```

Configure SmartPost for receiving messages

Configure SmartPost for receiving messages

A service workflow named e-Boks Message Handler handles the receiving of messages from e-Boks. The service workflow contacts e-Boks at regular intervals and checks for unread messages. In case of unread messages, a receipt workflow starts. When this workflow has been completed, the message is marked as read.

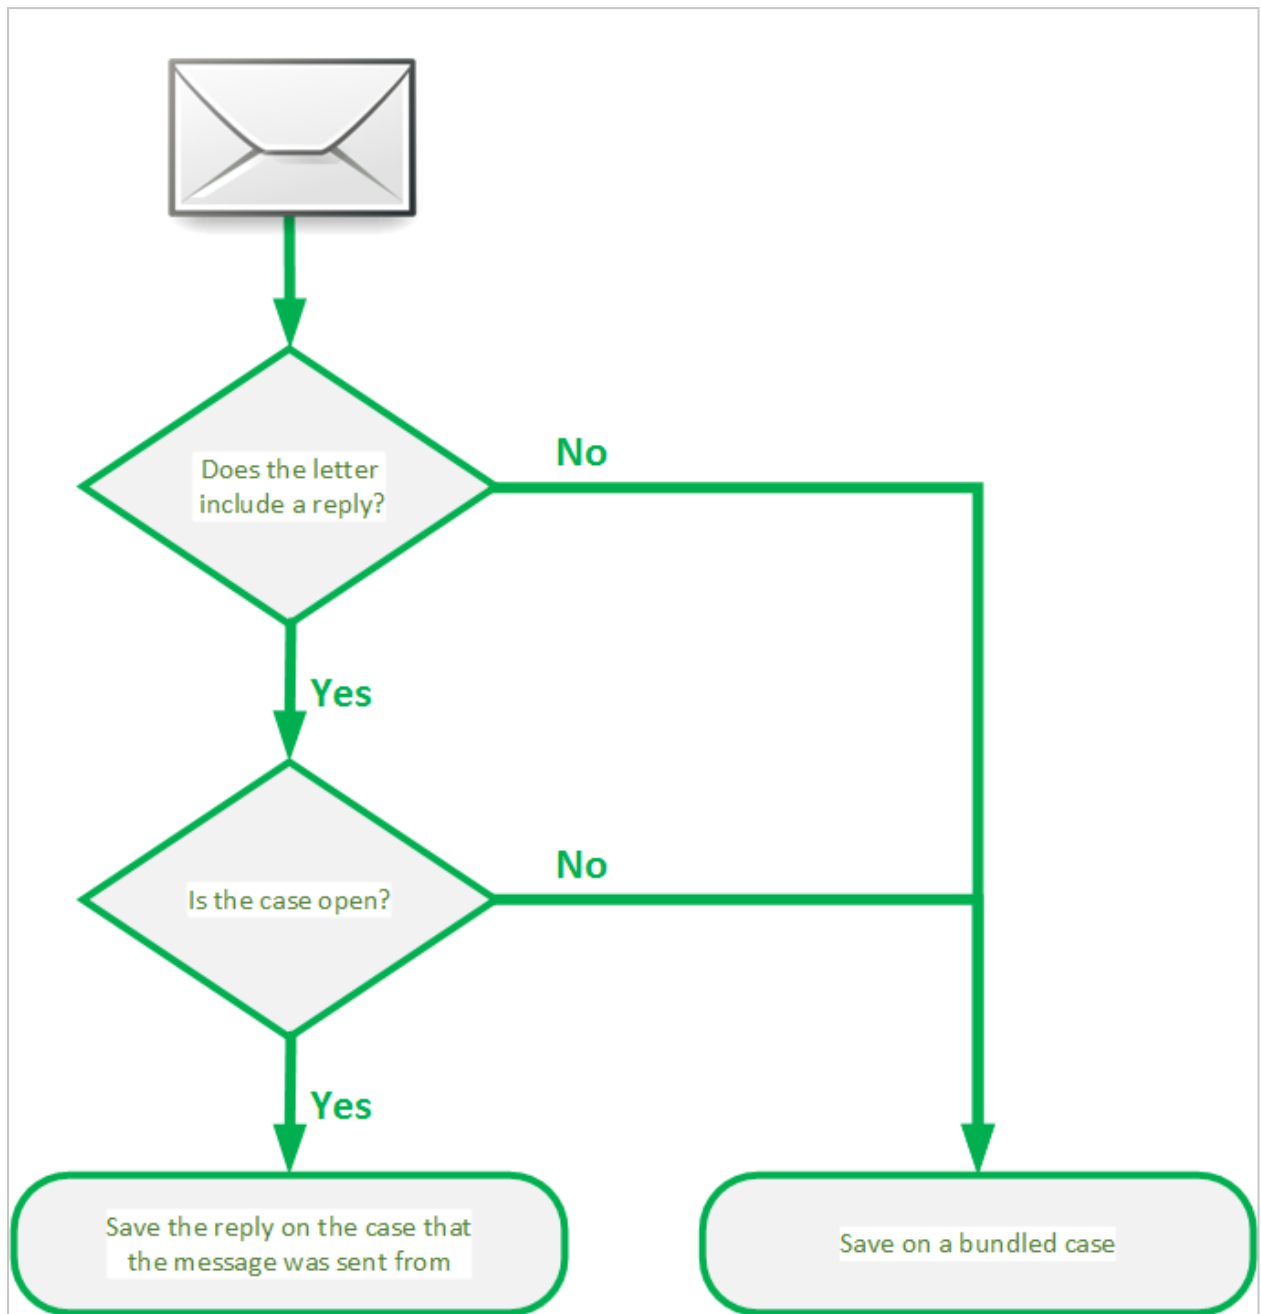

When SmartPost receives a message from e-Boks, SmartPost checks if the message is a reply to a message that was sent from SmartPost. If the message is not a reply but an unsolicited message, the message is saved as a document with possible supplementary documents on a predefined bundled case. If the unsolicited message is sent to a subunit in your organization, it is saved on a specific case, which is mapped to the subunit. See Handle e-Boks messages sent to subunits.


If the message is a reply, the message is saved as a document with possible supplementary documents on the case that the original SmartPost message was sent from.

The case must be open. If the case is closed, the letter is saved as a document on the bundled case.

You can configure SmartPost for receiving messages in WorkZone Configurator.

See also [Receive messages from SmartPost](#) in the WorkZone Process User Guide.


Configure SmartPost settings for receiving messages

1. Open WorkZone Configurator, and click **Process > Process dispatchers**.
2. Point to next to the e-Boks dispatcher you use, and click  **Edit dispatcher parameters**.
3. Specify the following parameters:
 - ReceiverSystemID
 - CertificateThumbprint

See [Configure dispatchers](#).

Configure an e-Boks Message Handler service workflow

You set up the e-Boks Message Handler service workflow in WorkZone Configurator.

1. In WorkZone Configurator, click **Process**.
2. Click **Service workflows**.
3. Add a new service workflow of the type e-Boks message handler, and enter a name and description, and then click **Create**.
4. Point to the **e-Boks message handler** service workflow that you just created, and click  **Edit parameters**, and fill in the parameters. For descriptions and examples, refer to the table below.

Name	Description	Value
DispatcherName	The dispatch type listed in the Dispatch Type	

Name	Description	Value
	list in the Process Dispatchers . It is used when retrieving unread messages.	
WatchInterval	Interval in seconds between SmartPost checking e-Boks for receipt of new messages.	300
RetryCount	The number of retries before messages are abandoned.	5
DefaultCaseNo	The case number of the bundled case on which incoming messages that cannot be assigned to a specific case will be saved. The case must always be open.	
EBoksInboundMessagePartyRole	The role of the party on the received e-Boks message. If the setting is not specified, the Sender role (Afsender) will be used.	Sender
IncomingDocumentType	The document type that will be assigned to the e-Boks message when it is saved on a case. For example, I (Incoming). The setting must match the settings for the custom domain AT.	I
DPIncomingSource	Origin of the incoming messages and their attachments as retrieved from e-Boks. For example, DP (Digital Post). The setting must match the settings for the custom domain AKTOPR.	DP
UseEBoksMailMap	If turned on, unsolicited messages sent from e-Boks to subunits in your organization will be saved on specific cases that are defined for each of the subunits. You specify the cases when you map e-Boks mailboxes for subunits to cases in Configuration Management. If the mapping of e-Boks mailboxes and subdivisions does not work, the received mes-	

Name	Description	Value
	sages will be saved on the default case that you have specified in the DefaultCaseNo parameter.	
ValidationHour	The time of the day when the validation of the contact hierarchy is scheduled. By default, it is 01:00 in the morning. e-Boks only allows access to the contact hierarchy once a day between midnight and 06:00. Enter time in the format 1 (01:00), 2 (02:00), and so on. See Configure validation of a contact hierarchy.	1
ValidateAtStartup	Starts the validation of the contact hierarchy when the service workflow is started. Use this parameter primarily for testing purposes. In production, this parameter has no effect. In production, the validation will only happen when the time specified in the ValidationHour parameter is met. By default, this parameter is turned off.	
OpenClosedCase	If turned on, a closed case is reopened if a message is received. The case will remain open.	

Handle e-Boks messages sent to subunits

If your organization receives unsolicited messages that are sent to subunits such as, for example, different authorities or subdivisions, you can configure the e-Boks message handler service workflow to save the messages on specific cases that are mapped to specific subunits.

To receive messages from the subunits' mailboxes in e-Boks and save the messages on specific cases in WorkZone, follow these steps:

1. Have mailbox names and IDs from e-Boks Administrationsportal at hand.
2. Create the cases you want to save received messages on.

3. Map e-Boks mailboxes and mailbox IDs to the cases on which you want the messages to be saved.
4. Enable receipt of messages from the subunits' mailboxes in an existing or a new e-Boks message handler service workflow.

Look up e-Boks mailbox names and IDs in Administrationsportal

To configure WorkZone Process to save received messages from the subunits' e-Boks mailboxes, you need to know the names and IDs of the e-Boks mailboxes as they have been defined in the e-Boks Administrationsportal.

1. Log in to e-Boks Administrationsportal as NemID-administrator (LRA), and click the **Kontaktmuligheder** tab.
2. Under **Postkasser**, click **Vis postkasser**.
3. Click **Info** next to the mailbox.
4. Note the mailbox ID (**Postkassens ID**) and the name (**Navn**).

Create default cases per subdivision mailbox

- In WorkZone Client, create a case per mailbox you want to save received messages on.


Map e-Boks mailboxes to cases

The next step is to map the e-Boks mailboxes to WorkZone units and cases.

1. Open WorkZone Configurator.
2. Go to **Process > e-Boks mail mapping**.
3. Enter the name of the e-Boks mailbox in the **Mailbox name** field and the corresponding ID in the **MailBox ID** field.
4. Select the responsible WorkZone unit.
5. Select the case that you want to save received messages on.

See also [e-Boks mailbox mapping](#) in the WorkZone Configurator Administrator Guide.

Enable receipt of messages from subunit mailboxes

1. In WorkZone Configurator, go to **Process > Service workflows**.
2. Point to an existing **e-Boks message handler** service workflow or create a new one, and click  **Edit parameters**
3. Turn on the UseEBoksMailMapparameter.

To create a new service workflow, see [Configure an e-Boks Message Handler service workflow](#).

Configure validation of a contact hierarchy

Each time the e-Boks message handler service workflow is started, it validates that the contact hierarchy in the e-Boks Administrationsportal matches the mapping of e-Boks mailboxes and cases that are configured in WorkZone Configuration Management. See the `ValidationHour` and `ValidateAtStartup` parameters and [Map e-Boks mailboxes to cases](#).

If the validation finds an e-Boks mailbox that does not exist in the **WzpEboksMailMap** register, it is created and shown in WorkZone Configuration Management, and a warning is inserted in the event log:

"The contact mailbox <name of mailbox> with the mailbox <ID> is added to the e-Boks mail map. Must be configured."

If a mailbox already exists in the **WzpEboksMailMap** register and is shown in WorkZone Configuration Management but it is not yet configured, a warning is also added in the event log:

"The contact mailbox <name of mailbox> is not configured in the e-Boks mail map."

In both cases, you need to complete the configuration in WorkZone Configuration Management.

Handling receipt of messages on closed cases

In some situations, the e-Boks message handler service workflow may require updating closed cases.

There are three case scenarios depending on which type of case the messages can be saved on.

1. The default case. The case that is specified in the **DefaultCaseNo** parameter.
2. The case that is mapped to a specific subunit's mailbox to receive unsolicited messages. See Handle e-Boks messages sent to subunits.
3. The case to which replies to a specific e-Boks message are saved. If the message is a reply, the message is saved on the same case that the original SmartPost message was sent from.

If any of these cases are closed, the service workflow will act differently depending on whether corporate access codes exist.

No corporate access codes

- In scenario 1 and 2, the respective case is reopened and the messages are saved. The case will stay open.
- In scenario 3, the message is saved on the default case (1).

Corporate access codes

- In scenario 1 and 2, the case is reopened and the messages are stored on the case. The case will remain open.
- In scenario 3, the bundled case mapped to the authority's mailbox is looked up and the message is saved on this case.

WorkZone identifies the authority's bundled case based on the file key (`FileKey`) from the case that the original message was sent from. The authority on the case is identified, and if a bundled case exists for the authority, the message will be saved on this case.

Create a bundled case for the authority by mapping the authority's mailbox to a case, and selecting the authority as responsible unit. See [Map e-Boks mailboxes to cases](#).

- If there is no mapping found for the subunit, the message is saved on the default case (1).

Dispatcher error handling

If SmartPost fails due to e-Boks, KMD Printcenter, or Strålfors errors, error messages with error codes are written to the workflow log. See [Process logging](#) in the WorkZone Operations Guide. SmartPost performs actions according to the type of errors. See the topics below for a list of errors, descriptions, and actions.

e-Boks errors

If digital mail does not work due to e-Boks errors, e-Boks returns different error codes and messages. The error messages are written to the workflow log. See [Investigate failed processes in the workflow log](#) in the WorkZone Operations Guide.

SmartPost performs the following action depending on the type of error:

- **Notify**

The dispatch failed and the workflow is ended. A notification email that informs about the failed dispatch is sent to the process owner.

- **Retry**

SmartPost tries to send the message through the same dispatcher once more.

- **Try next**

SmartPost tries to send the message to the next dispatcher in the dispatch sequence.

The table below lists possible e-Boks errors and describes how you can possibly handle the errors. Some types of errors can only be handled by KMD.

Error type 1: Not a SmartPost error

These error codes can only be part of replies on a request that is not used by SmartPost, and therefore these error messages should never occur. If you get an error message of this type anyway, please forward the message to your organization's WorkZone administrator or to KMD Support for further analysis and action.

Error type 2: Internal program error

These error codes occur in case of an internal program error. Please forward this type of error message to your organization's WorkZone administrator or to KMD Support for further analysis and action.

Error code	e-Boks error message	SmartPost action	To fix the error...
2001	XML ikke valid XML is not valid	Try next	No action required. SmartPost tries to send the message through another dispatcher.
2002	Max graense for data overskredet The max limit of data is exceeded	Notify	<p>A notification email about the failed dispatch is sent to the process owner.</p> <p>Please check that the values of the MaxCombinedMessageLength parameter in the SmartPost process parameters and the MaxDocumentSize parameter for the e-Boks dispatcher are higher than the limit set by e-Boks. The values must be lower than the limit defined by e-Boks.</p>
2003	Servicebesked indeholder flere tegn end tilladt The service message contains more characters than allowed	Try next	No action required. SmartPost tries to send the message through another dispatcher.
3000	Ingen adgang No access	Notify	<p>The certificate does not provide access to the specified system. Please check your configuration of the e-Boks dispatcher in WorkZone Configurator. Click Process > Process dispatchers, and then verify that the Sender-SystemId setting aligns to your configuration in e-Boks.</p>
3001	Angivne SystemId er ikke af forventet systemtype	Notify	SmartPost expects that the system, which is configured in e-

Error code	e-Boks error message	SmartPost action	To fix the error...
	The specified SystemId does not correspond to a system of the expected type		Boks is a "Afsendersystem" (dispatch system). Please log into the e-Boks Administration Portal, and identify the "Afsendersystem" that you want SmartPost to use, and note the identity of the system. Next, open your configuration of e-Boks dispatcher in WorkZone Configurator. Click Process > Process dispatchers , and ensure that value of the Sender-SystemId settings is set to that identity.
3002	Manglende rettighet til kald af operation Insufficient rights to calling the operation	Notify	See Error type 1: Not a SmartPost error.
3003	Certifikat mangler i request The certificate is missing in a request	Notify	<ul style="list-style-type: none"> • Check your configuration of the e-Boks dispatcher in WorkZone Configurator. Click Process > Process dispatchers, and then verify the CertificateThumbprint setting. • Check that your certificate is valid.

Error code	e-Boks error message	SmartPost action	To fix the error...
3004	Certifikatet er ugyldigt The certificate is invalid	Notify	<ul style="list-style-type: none"> • Check your configuration of the e-Boks dispatcher in WorkZone Configurator. Click Process > Process dispatchers, and then verify the CertificateThumbprint setting. • Check that your certificate is valid.
3005	Systemet er ikke opsat til REST The system is not configured to support the REST	Notify	Please log into the e-Boks Administration Portal and identify the "Afsendersystem" (dispatch system) that you want SmartPost to use. Open the configuration page of the system, and verify that the interface to send messages ("Hvilken snitflade anvendes til at afsende post?") is configured to System-til-system.
3006	Systemet er ikke opsat til SMIME The system is not set up for SMIME	Notify	See Error type 1: Not a SmartPost error.
3007	X-On-Behalf-Of header er påkrævet for dette kald X-On-Behalf-Of header is required for this call	Notify	See Error type 1: Not a SmartPost error.
3008	Slutbruger er ikke dok-	Try next	No action required. SmartPost

Error code	e-Boks error message	SmartPost action	To fix the error...
	umentboksmodtager og har ikke adgang The end user is not a document box recipient and has no access		tries to send the message through another dispatcher.
3009	Slutbruger er hverken servicebeskedmodtager eller dokumentboksmodtager The end user is neither a service messages recipient or a document box recipient	Try next	No action required. SmartPost tries to send the message through another dispatcher.
3010	Operation kaldt i ugyldigt tidsrum The operation is called in an invalid time span	Notify	See Error type 1: Not a SmartPost error.
4000	Ugyldig queryparameter Invalid queryparameter	Notify	See Error type 1: Not a SmartPost error.
4003	Ukendt bilagId. Unknown supplementary document ID	Notify	See Error type 1: Not a SmartPost error.
4005	Default indholdstype ikke opsat på system The default content type is not set up on the system	Notify	See Error type 1: Not a SmartPost error.
4007	Ukendt slutbruger Unknown end user	Try next	No action required. SmartPost tries to send the message through another dispatcher.
4008	Antal vedhæftninger ikke lovlig Number of attachments is invalid	Try next	No action required. SmartPost tries to send the message through another dispatcher.

Error code	e-Boks error message	SmartPost action	To fix the error...
4010	Ukendt meddelelsesid Unknown message ID	Notify	See Error type 2: Internal program error.
4011	Ukendt vedhaeftningsid Unknown attachment ID	Notify	See Error type 2: Internal program error.
4012	Ukendt indholdstype Unknown content type	Notify	See Error type 2: Internal program error.
4013	Ukendt tilmeldingsgruppe Unknown subscription group	Notify	See Error type 1: Not a SmartPost error.
4016	Ukendt postkasse Unknow mailbox	Notify	See Error type 1: Not a SmartPost error.
4017	Ukendt postkasseEmne Unknown mailbox subject	Notify	See Error type 1: Not a SmartPost error.
4018	Hverken CPR eller CVR nummer er angivet Neither a CPR nor a CVR number is registered	Notify	A recipient does not have CPR or CVR number. Please check the contact information on the Contact detail page in WorkZone Client, and add missing information.
4019	Både CPR og CVR nummer er angivet Both CPR and CVR number is registered	Notify	A recipient has both a CPR or CVR number. Please check the contact information on the Contact detail page in WorkZone Client, and remove incorrect information.
4020	Dialogtråd er ikke i korrekt format Dialog thread is not in the correct format	Notify	See Error type 1: Not a SmartPost error.

Error code	e-Boks error message	SmartPost action	To fix the error...
4021	Ukendt dialogtråd Unknown dialog thread	Notify	See Error type 1: Not a SmartPost error.
4022	Afhentningssystem er opsat til at hente fra indbakke The dispatch system is set up to load from the inbox	Notify	See Error type 1: Not a SmartPost error.
4023	Afhentningssystem er opsat til at tømme postkasse The dispatch system is set up to empty the mailbox	Notify	See Error type 1: Not a SmartPost error.
4024	Ugyldig CVR nummer format Invalid CVR number format	Notify	A recipient has an invalid CVR number. Please check the contact information on the Contact detail page in WorkZone Client, and correct the CVR number.
4025	Fællesoffentlige portal forventer angivelse af myndighed The common public portal expects specification of authority	Notify	See Error type 1: Not a SmartPost error.
4026	Ugyldig format på meddelelsesld Invalid format on meddelsesld	Notify	See Error type 2: Internal program error.
4027	Angiv mindst et af felterne MobilNummer / EpostAdresseFørste Specify at least one of the MobilNummer / EpostAdresseFørste fields	Notify	See Error type 1: Not a SmartPost error.
4028	Svarpostkasse skal angives når svartype er sat til 'angivet'	Notify	See Error type 1: Not a SmartPost error.

Error code	e-Boks error message	SmartPost action	To fix the error...
	The reply mailbox must be specified when the reply type is set to 'angivet'		
4029	Ingen kvitteringsliste tilgængelig No receipt list is available	Notify	See Error type 1: Not a SmartPost error.
4030	Ukendt kviteringslisteld No receipt list is available	Notify	See Error type 1: Not a SmartPost error.
4031	Tilmeldingsliste er ikke opsat for system Subscription list is not set up for the system	Notify	See Error type 1: Not a SmartPost error.
4032	Ukendt tilmeldingslisteld Unknown tilmeldingslisteld	Notify	See Error type 1: Not a SmartPost error.
4033	Ukendt dellisteld Unknown dellisteld	Notify	See Error type 1: Not a SmartPost error.
4034	Listen er blevet forældet - start forfra The list is out of date - start over again	Notify	
4035	Liste ikke tilgængelig The list is not accessible	Notify	See Error type 1: Not a SmartPost error.
4036	Kvittering ikke muligt for komplette lister Receipt is not possible for complete lists.	Notify	See Error type 1: Not a SmartPost error.
4037	Registret har ikke tilkøbt adgang til slutbrugerlister	Notify	See Error type 1: Not a SmartPost error.

Error code	e-Boks error message	SmartPost action	To fix the error...
	The register has not purchased access to end user lists		
4038	StartDato mangler - påkrævet søgeparameter StartDato is missing - required search parameter	Notify	See Error type 1: Not a SmartPost error.
4039	SlutDato mangler - påkrævet søgeparameter SlutDato is missing - required search parameter.	Notify	See Error type 1: Not a SmartPost error.
4040	IkkeTilmeldte - ugyldig format IkkeTilmeldte - invalid format	Notify	See Error type 1: Not a SmartPost error.
4041	Myndighed - ugyldig format Myndighed - unknown format	Notify	See Error type 1: Not a SmartPost error.
4042	CPR - ugyldig format The format of the CPR number on a recipient is invalid	Notify	See Error type 2: Internal program error.
4043	CVR - ugyldig format The format of the CVR number on a recipient is invalid	Notify	See Error type 2: Internal program error.
4044	Indholdstype og tilmeldingsgruppe kan ikke angives samtidig The content type and subscription group cannot be used at the same time	Notify	See Error type 1: Not a SmartPost error.
4045	StartDato - ugyldig format StartDato - invalid format	Notify	

Error code	e-Boks error message	SmartPost action	To fix the error...
4046	SlutDato - ugyldig format SlutDato - invalid format	Notify	
4047	Ukendt slutbrugerlisteld Unknown slutbrugerlisteld	Notify	See Error type 1: Not a SmartPost error.
4048	Netop et af felterne Myn- dighedTilmeldtIndikator og AlleMyndighederTilmeldtIndikator skal være udfyldt At least one of the fields Myn- dighedTilmeldtIndikator or AlleMyn- dighederTilmeldtIndikator must be filled in	Notify	See Error type 1: Not a SmartPost error.
4049	Registret er ikke opsat til at mod- tage slutbrugerlister The register is not set up to receive end user lists	Notify	
4050	Hverken VedhaeftningNavn eller FilformatNavn må være udfyldt for en vedhæftning som refererer et bilag Neither VedhaeftningNavn nor Fil- formatNavn need to be filled for an attachment that refers to a sup- plementary document	Notify	See Error type 1: Not a SmartPost error.
4051	Feltet SlutbrugerNavn skal være udfyldt The SlutbrugerNavn field must be filled in	Notify	See Error type 1: Not a SmartPost error.
4052	Indholdsdata mangler for en	Notify	See Error type 2: Internal pro-

Error code	e-Boks error message	SmartPost action	To fix the error...
	afsendelse / vedhæftning Content data is missing for a dispatch / attachment		gram error.
4053	Materialet er ikke tilknyttet systemet The material is not registered in the system.	Notify	Check that your configuration of the e-Boks material in WorkZone Configurator aligns to the configuration in e-Boks. Click Process > e-Boks materials .
4054	Vedhæftninger må ikke optræde med samme navn Attachments must not have the same name	Notify	See Error type 2: Internal program error.
4055	Afvist pga. virus Rejected due to virus	Notify	See Error type 2: Internal program error.
4056	Ugyldig tilmeldingsgruppe (tilhørsforhold privat / virksomhed) Invalid subscription group (affiliation private / company)	Notify	See Error type 1: Not a SmartPost error.
4057	Ugyldigt tegn i vedhæftningsfilnavn Invalid character in attachment file name	Notify	See Error type 2: Internal program error.
4059	Materiale findes ikke The material cannot be found	Notify	Check that your configuration of the e-Boks material in WorkZone Configurator aligns to the configuration made in e-Boks. Click Process > e-Boks materials , and check if the e-

Error code	e-Boks error message	SmartPost action	To fix the error...
			Boks material has been configured.
4060	Kunden findes ikke The customer does not exist	Notify	Please contact e-Boks for verification of your legal agreement and the state of your registration.
4061	Samme bilag er angivet flere gange The same supplementary document is attached several times	Notify	This error cannot occur in the current version of SmartPost. SmartPost merges all attachments into one main PDF document. However, two additional meta data documents are attached (DKALAf-senderMetadata.xml and Attention.xml). The user has no control of these attachments nor their content.
4062	Dokument er ikke ejet af kunde The document is not owned by the customer	Notify	See Error type 1: Not a SmartPost error.
4063	Tidsfrist er ikke angivet No deadline is specified	Notify	See Error type 1: Not a SmartPost error.
4064	Emnet tilhører ikke den angivne postkasse The subject does not belong to the specified maillbox	Notify	See Error type 1: Not a SmartPost error.
4065	Angivet bilags nr findes ikke eller bilaget tilhører ikke kunden The specified supplementary document No. does not exist or the sup-	Notify	See Error type 1: Not a SmartPost error.

Error code	e-Boks error message	SmartPost action	To fix the error...
	plementary document does not belong to the customer.		
4066	Servicebesked kan ikke have bilag eller vedhæftning A service message cannot have supplementary documents or attachments	Notify	See Error type 1: Not a SmartPost error.
4067	Antal bilag og vedhæftninger maks 10 stk ialt The number of documents and supplementary documents exceeds the maximum number of 10 documents	Notify	Error type 2: Internal program error.
4068	Afsendelsestidspunkt kan ikke ændres, når bruger ikke er tilmeldt materialet The dispatch time cannot be changed when the user is not subscribed to the material	Notify	See Error type 1: Not a SmartPost error.
4069	Vedhæftningen indeholder et ugyldigt navn The attachment contains an invalid name	Notify	See Error type 2: Internal program error.
4070	Ukendt SystemNr Unknown SystemNr	Notify	See Error type 1: Not a SmartPost error.
4071	Feltet MeddelelsesTitelTekst indeholder mere end 50 tegn The MeddelelsesTitelTekst field contains more than 50 characters	Notify	In the Send SmartPost dialog box, reduce the size of the title, and resubmit the dispatch.

Error code	e-Boks error message	SmartPost action	To fix the error...
4072	Et register kan ikke afmelde tilmeldingsgrupper som indeholder meddelelser A register cannot unsubscribe subscription groups that contain messages	Notify	See Error type 1: Not a SmartPost error.
4073	Ugyldig email Invalid email	Notify	See Error type 1: Not a SmartPost error.
4074	Ugyldig brug af AutoTitel i Titelfelt Invalid of use of AutoTitel in Titelfelt	Notify	See Error type 1: Not a SmartPost error.
4075	Ugyldig format på AutoTitel Invalid format on AutoTitel	Notify	See Error type 1: Not a SmartPost error.
4076	Systemet er opsat til Push The system is set to Push	Notify	See Error type 1: Not a SmartPost error.
4080	For at slutbruger kan tilmeldes Nem SMS skal vedkommende have opgivet et mobilnummer For the end user to subscribe to Nem SMS, the end user must have provided a mobile number	Notify	See Error type 1: Not a SmartPost error.
4086	Slutbruger er blevet fritaget. The end user has been exempted	Try next	See Error type 1: Not a SmartPost error.
6001	Ikke muligt at foretage opdateringer - afsendelsen er afsendt Not possible to perform updates - the dispatch has been sent	Notify	See Error type 1: Not a SmartPost error.
6002	Arkiveringsmappe er ikke opsat	Notify	See Error type 1: Not a

Error code	e-Boks error message	SmartPost action	To fix the error...
	The archive folder has not been set up		SmartPost error.
6003	Slutbrugeren er ikke tilmeldt indholdstypen The end user is not subscribed to the content type	Try next	See Error type 1: Not a SmartPost error.
6004	Afsendelsesdato må højst være 5 dage frem i tiden The dispatch date must only be 5 days from now	Notify	See Error type 1: Not a SmartPost error.
1000	Serverfejl Server error	Notify	<p>The e-Boks server has reported an internal server error. The SmartPost process cannot detect if the message has been sent or not. The process owner must investigate if the message has been sent.</p> <p>For example, the server error may occur after the message is received but before the status/receipt is reported back to WorkZone. In this case, the process owner will be notified about the failed dispatch. The process will be completed and the history document will be generated and show status of each dispatch.</p>

Strålfors errors

If remote print does not work due to Strålfors errors, Strålfors returns different error codes and messages. The error messages are written to the workflow log. See [Investigate failed processes in the workflow log](#) in the WorkZone Operations Guide.

SmartPost performs the following action depending on the type of error:

- **Notify**

The dispatch failed and the workflow is ended. A notification email that informs about the failed dispatch is sent to the process owner.

- **Retry**

SmartPost tries to send the message through the same dispatcher once more.

- **Try next**

SmartPost tries to send the message to the next dispatcher in the dispatch order.

- **Complete**

The workflow continues and is ended successfully.

The table below lists possible Strålfors errors and describes how you can possibly handle the errors. Some types of errors can only be handled by KMD.

Error type 1: Not a SmartPost error

These error codes can only be part of replies on a request that is not used by SmartPost, and therefore these error messages should never occur. If you get an error message of this type anyway, please forward the message to your organization's WorkZone administrator or to KMD Support for further analysis and action.

Error type 2: Internal program error

These error codes occur in case of an internal program error. Please forward this type of error message to your organization's WorkZone administrator or to KMD Support for further analysis and action.

When support is mentioned in the **Strålfors error description** column below, it refers to the Strålfors support.

Error code	Strålfors error message	Strålfors error description	SmartPost action	To fix the error...
100-2	Uventet systemfejl	Kontakt supporten.	Retry	
101-0	Afsendersystem kunne ikke findes The dispatch system cannot be found	Afsendersystem kendes ikke af Strålfors Connect. Hvis aftale er indgået, så kontakt venligst supporten.	Notify	Check the Strålfors dispatcher configuration in WorkZone Configurator. Click Process > dispatcher > Strålfors , and then check the Sender-SystemID setting.
101-2	Tilslutningsaftalen for afsendersystemet er ikke godkendt The agreement for the dispatch system is not approved	Afsendersystem har ikke en godkendt aftale. Hvis aftalen allerede er indgået, så kontakt venligst supporten.	Notify	See Error type 1: Not a SmartPost error.
101-3	Skemafejl i afsendt besked Schema error in the dispatched message	Xml'en skal overholde XSD skemaet.	Notify	See Error type 1: Not a SmartPost error.
110-0	Forsendelse type kunne ikke findes The dispatch type could not be found	Den anvendte forsendelsestype på forsendelsen findes ikke i Strålfors Connect. Benyt en anden forsendelsestype og send forsendelsen igen. Eller kontakt support, hvis	Notify	See Error type 2: Internal program error.

Erro- r code	Strålfors error message	Strålfors error description	SmartPo- st action	To fix the error...
		forsendelsestypen burde eksistere.		
111- 2	Forsendelsestypen har ikke en gyldig version The dispatch type does not have a valid version	Tjek i administrationsportalen, at den angivne forsendelsestype har en gyldig version.	Notify	See Error type 1: Not a SmartPost error.
111- 3	Det angivne ForsendelsesTypeID passer ikke med default forsendelsestypen, der er låst på afsendersystemet The specified ForsendelsesTypeID does not match the default dispatch type that is locked in the dispatch system	Forsendelsestypen er låst på afsendersystem. Find den låste forsendelsestype i administrationsportalen og angiv denne eller undlad at angive forsendelsestypeID. Send forsendelsen igen.	Notify	
111- 4	Forsendelsestype ikke angivet, og der er ikke angivet en default forsendelsestype på afsendersystemet The dispatch type is not specified, and the default dispatch type is not specified in the dispatch system	Angiv forsendelsestype eller opsæt en default-forsendelsestype på afsendersystemet i administrationsportalen.	Notify	
120- 0	JMS fejler JMS fails	Intern fejl i Strålfors Connect. Kontakt venligst supporten.	Retry	No action required. WorkZone tries to resend the mes-

Error code	Strålfors error message	Strålfors error description	SmartPost action	To fix the error... sage.
120-9	<p>Indholdet i StreetBuildingIdentifier kan ikke fortolkes som husnummer og bogstav</p> <p>The content of the StreetBuildingIdentifier cannot be interpreted as house number and letter</p>	Husnummer og bogstav kan ikke fortolkes til et nummer og et bogstav. Tjek at husnummer og bogstav er angivet korrekt.	Try next	See Error type 2: Internal program error.
121-1	<p>SideKvantitet skal angives når meddelelsen kommer fra PrinterApp</p> <p>SideKvantitet must be specified when the message comes from PrinterApp</p>	Fejlbesked, der kun gælder printerapplikationer.	Notify	See Error type 2: Internal program error.
121-2	<p>Afsendelseidentifikator allerede modtaget</p> <p>Afsendelseidentifikator is already received</p>	Det ID, der er angivet på Forsendelsen er allerede modtaget af Strålfors Connect. Angiv et andet id eller kontakt support.	Complete	No action required. WorkZone continues sending.
123-4	<p>Landekoden skal indeholde en valid Landekode.</p> <p>Landekode <xxxx> er ikke valid</p> <p>The country code must contain a valid country code.</p> <p>The country code <xxxx> is not valid</p>	Landekoden overholder ikke standarden i XML-schemaet. Ret op og send igen.	Notify	A recipient has an invalid address. Please check the contact information on the Contact detail page in WorkZone Client, and correct the country code.

Erro- r code	Strålfors error message	Strålfors error description	SmartPo- st action	To fix the error...
123- 5	Modtageradressen skal indeholde et validt dansk postnummer, hvis modtager adressen er dansk. Postnummer <xxxx> er ikke et validt dansk postnummer The recipient address must contain a valid Danish postal code, if the recipient address is Danish. The postal code <xxxx> is not a valid postal code	Angiv et dansk postnummer for modtager.	Notify	A recipient has an invalid address. Please check the contact information on the Contact detail page in WorkZone Client, and correct the postal code.
123- 7	Struktureret modtager adresse skal have dansk landekode A structured recipient address must have a Danish country code	Angiv dansk landekode for modtager	Notify	See Error type 2: Internal program error.
124- 1	En adresse skal være angivet i ModtagerAdresse, når PaatrykModtager-AdresseIndikator er sat til true An address must be specified in i ModtagerAdresse when PaatrykModtager-AdresseIndikator is set to true	Sæt PaatrykModtager-AdresseIndikator til false eller angiv adresse på modtaget (struktureret eller ustruktureret).	Notify	See Error type 2: Internal program error.
124-	AfsendelsesDatoTid må	For at kunne sende til	Notify	See Error type

Error code	Strålfors error message	Strålfors error description	SmartPost action	To fix the error...
3	<p>højest være 5 dage ud i fremtiden</p> <p>AfsendelsesDatoTid must only be 5 days from now</p>	<p>digital post må</p> <p>AfsendelsesDatoTid højest være 5 dage ud i fremtiden.</p> <p>Ret dato til en tidligere dato eller afvendt med at sende forsendelsen.</p>		2: Internal program error.
124-5	<p>Der forsøges at oprette forsendelser til en Massefor sendelse, der har status lukket eller massefor sendelsen findes ikke</p> <p>An attempt to create dispatches for a bulk dispatch, which has the status closed or the bulk dispatch does not exist</p>	<p>Der forsøges at oprette forsendelser til en Massefor sendelse, der har status lukket. Opret en ny massefor sendelse eller send forsendelsen som enkeltfor sendelse.</p>	Notify	See Error type 1: Not a SmartPost error.
124-7	<p>Der må ikke oprettes en forsendelse, der er del af en massefor sendelse med reference til en forsendelsestype, der er i test.</p> <p>You must not create a dispatch, which is part of a bulk dispatch with reference to a dispatch type, that is in test</p>	<p>Anvend en forsendelsestype der ikke er i test.</p>	Notify	See Error type 1: Not a SmartPost error.
125-1	<p>Der er ikke angivet materiale for test-afsendersystem til digital post</p>	<p>Når en forsendelsestype er i test skal der være angivet et defafult materiale for test-afsendersystem til digital</p>	Notify	See Error type 2: Internal program error.

Error code	Strålfors error message	Strålfors error description	SmartPost action	To fix the error...
	No material is specified for the test dispatch system for digital mail	post. Angiv materiale under myndighed på administrationsportalen.		
125-4	Landekodeidentifikationskemaet er ukendt. Kun ISO_3166_ALPHA_2 og ISO_3166_ALPHA_3 er tilladt The country code schema is unknown. Only ISO_3166_ALPHA_2 and ISO_3166_ALPHA_3 is allowed	Anvend landekode ISO 3166 ALPHA 2 eller ALPHA 3.	Notify	A recipient has an invalid address. Please check the contact information on the Contact detail page in WorkZone Client, and correct the country code.
126-1	Hastebrev kan ikke sendes som economique eller bulkmail Urgent letter cannot be sent as economique or bulkmail	Angiv en anden postkategori for forsendelsen. Postkategorien kan være Prioritaire, Rekommanderet, Rekommanderet med modtagerbevis eller Forkyndelse.	Notify	The print type selected in the Send SmartPost dialog box defines an invalid combination of postage category and urgency level. The print type defines an Economique combined with an urgency level set to High. This combination is not allowed. Please check your configuration of the Strålfors dispatcher in

Error code	Strålfors error message	Strålfors error description	SmartPost action	To fix the error...
				WorkZone Configurator. Click Process > Print Types , locate the invalid value, and correct it.
128-0	Den angivne produktionsplan (AllokeringsID) eksisterer ikke for forsendelsestypen (ForsendelsesTypeID) The specified production plan(AllokeringsID) does not exist for the dispatch type (ForsendelsesTypeID)	Tjek at produktionsplan og tilhørende forsendelsestype i Administrationsportalen, og angiv de korrekte værdier.	Notify	See Error type 1: Not a SmartPost error.
170-0	Intet klient certifikat medsendt No client certificated is sent	Medsend certifikat. Hvis certifikat er medsendt, så kontakt support.	Notify	Check your configuration of the Strålfors dispatcher in WorkZone Configurator. Click Process > Process dispatchers , and then verify the CertificateThumbprint setting.
170-1	Ingen adgang No access	Kontakt supporten	Notify	

Error code	Strålfors error message	Strålfors error description	SmartPost action	To fix the error...
170-2	<p>Certifikatet er blevet revokeret</p> <p>The certificate has been revoked</p>	<p>Certifikatet er blevet revokeret. Tjek hvilket certifikat der er anvendt til at oprette afsendesystemet og benyt dette certifikat til, at kalde servicen. Ellers kontakt support.</p>	Notify	<p>Check your configuration of the Strålfors dispatcher in WorkZone Configurator. Click Process > Process dispatchers, and then verify the CertificateThumbprint setting.</p>
170-3	<p>Certifikatet er ikke gyldigt</p> <p>The certificate is not valid</p>	<p>Certifikatet er ikke fyldigt. Tjek hvilket certifikat der er anvendt til at oprette afsendesystemet og benyt dette certifikat til, at kalde servicen. Ellers kontakt support.</p>	Notify	<p>Check your configuration of the Strålfors dispatcher in Work. Click Process > Process dispatchers, and then verify the CertificateThumbprint setting.</p>
170-4	<p>Certifikatet er ikke et VOCES, MOCES eller FOCES certifikat</p> <p>The certificate is not a VOCES, MOCES eller FOCES certifikat</p>	<p>Der anvendes at andet certifikat, end de tilladte certifikat-typer (VOCES, MOCES og FOCES). Tjek hvilket certifikat der er anvendt til at oprette afsendesystemet og benyt dette certifikat til, at kalde</p>	Notify	<p>Please retrieve a VOCES, MOVES, or FOCES certificate, upload the public part to Strålfors, and then add the private part to the cer-</p>

Error code	Strålfors error message	Strålfors error description	SmartPost action	To fix the error...
		servicen. Ellers kontakt support.		tificate store of the machine on which WorkZone Process is installed.

OneTooX errors

If remote print does not work due to OneTooX errors, OneTooX returns various error codes and messages. The error messages are written to the workflow log and to the event log of the web server. See [Investigate failed processes in the workflow log](#) in the WorkZone Operations Guide..

SmartPost performs the following action depending on the type of error:

- **Notify**

The dispatch failed and the workflow is ended. A notification email that informs about the failed dispatch is sent to the process owner.

- **Retry**

SmartPost tries to send the message through the same dispatcher again.

- **Try next**

SmartPost tries to send the message to the next dispatcher in the dispatch sequence.

- **Complete**

The workflow continues and is ended successfully.

The table below lists possible OneTooX errors and describes how you can handle the errors. Some types of errors can only be handled by KMD. These error codes occur in case of an internal program error. Please forward this type of error message to your organization's WorkZone administrator or to KMD Support for further analysis and action.


Error code	OneTooX error message	SmartPost action	To fix the error...
10030	<p>Dokumentet har ikke det rigtige format. Første side i et hoveddokument skal være A4 stående.</p> <p>The document does not have the correct format. The cover page in a main document must be A4 portrait.</p>	Try next	<p>Change the page layout of the main document before sending the SmartPost message. The first page of the document must be formatted as A4 portrait. If the first page is a protected address cover page or a copy recipient cover page, the cover page template must be corrected accordingly.</p> <p>See Configure templates.</p>
	Destination is not allowed.	Notify	<p>This error only occurs when a change has been made to the protocol that SmartPost and KMD Printcenter uses to communicate. This error can only be solved by a software update from KMD.</p>
	DocumentType could not be found.	Try next	<p>A valid document type must be configured, or a designated document type must be created. To achieve the full functionality of SmartPost, four document types must be created and configured. Contact KMD Printcenter who will create the document types. The configuration is made using WorkZone Configurator. The four document types must cover all combinations of color, black and white, and single or double-sided print.</p> <p>See OneTooX.</p>
9300	Forsendelsen er for stor til print. Det maksimalt tilladte antal ark er 240.	Try next	<p>SmartPost messages sent to KMD Printcenter cannot contain more than 240 pages. If your dispatch exceeds 240 pages and you want to use KMD Printcenter, you must split your dispatch into several individual dispatches.</p>

Error code	OneTooX error message	SmartPost action	To fix the error...
	The dispatch is too large for printing. Maximum allowed is 240 pages. Maximum allowed is 240 pages.		
9207	Ukendt postmodtagerland. Unknown receiver country.	Notify	The recipient's address contains an unknown country code and therefore the dispatch cannot be sent. Country codes are standardized (ISO 3166-1). You can find the complete list of all valid country codes at https://countrycode.org/ . The country code is part of the recipient's address information in WorkZone, and it is generally configured in WorkZone. To identify and correct unknown country codes, verify the configured country codes.
	Protocol URL schema or content type is not allowed.	Notify	This error only occurs when a change has been made to the protocol that SmartPost and KMD Printcenter uses to communicate. This error can only be solved by a software update from KMD.

Other configurations

You can configure settings for WorkZone Process in WorkZone Configurator. The settings apply across process workflows and tasks.

- In WorkZone Configurator, click **Process > Process settings**.

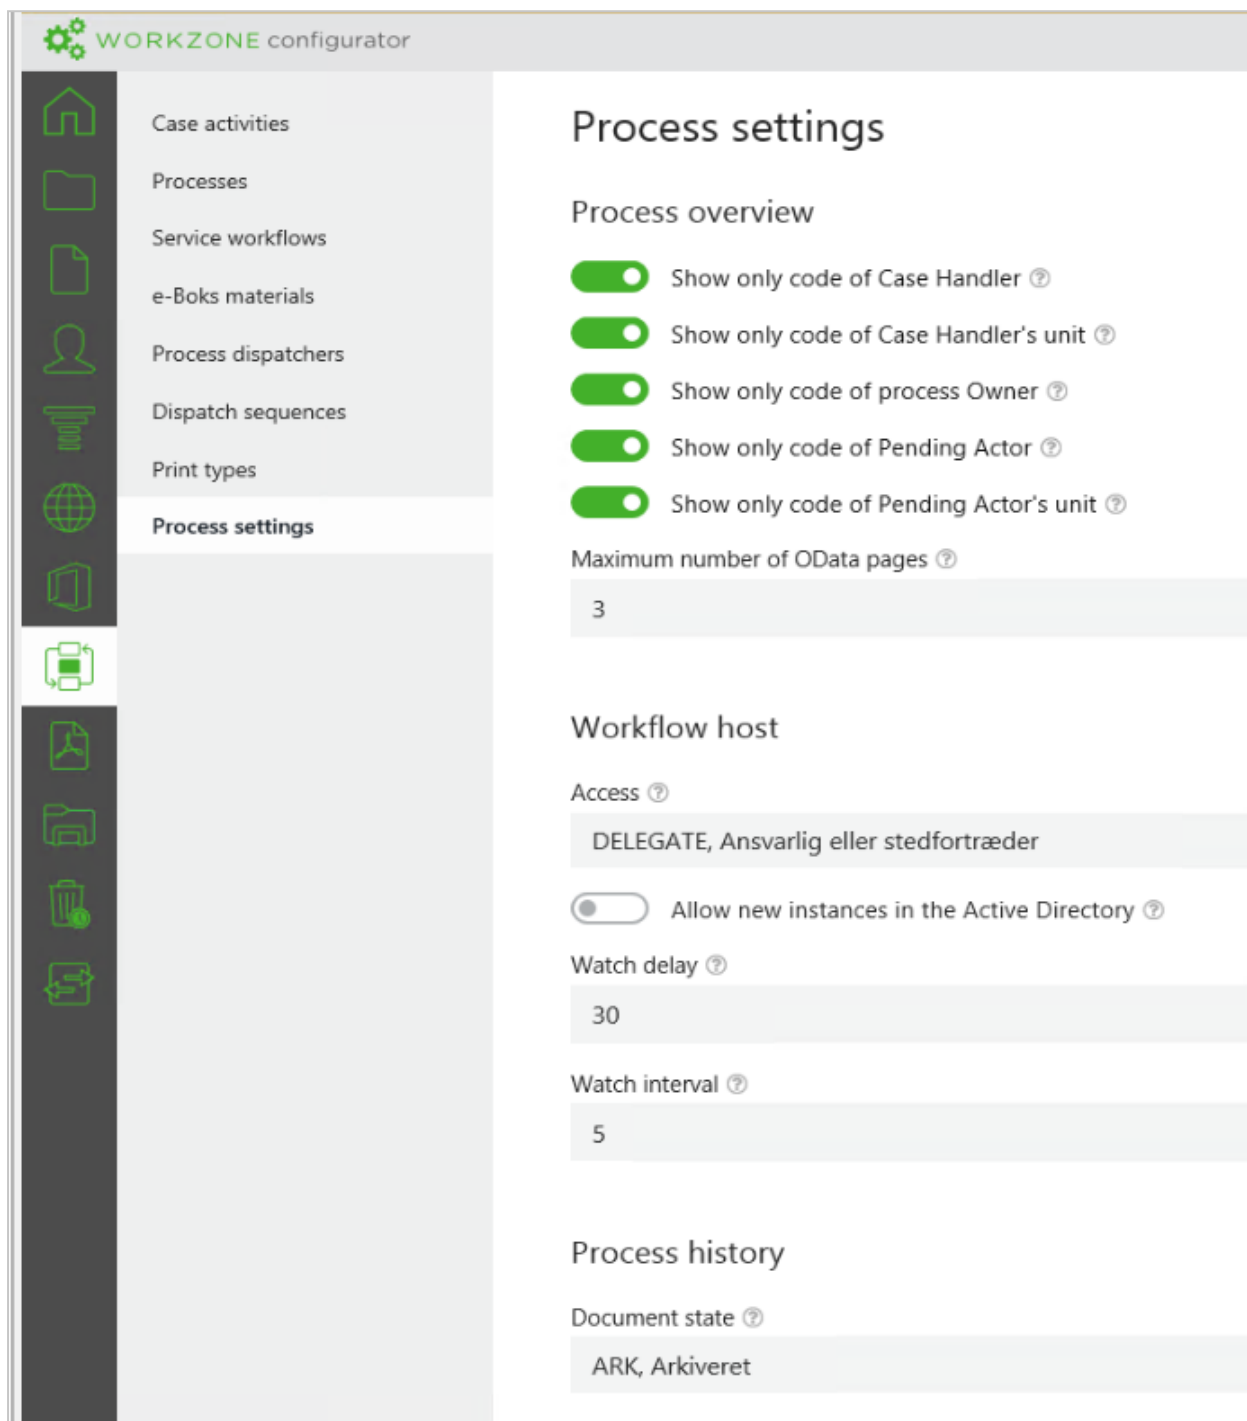


Create and share lists

If you have some knowledge of the WorkZone Process data model, you can create lists that are based on queries that you create using WorkZone QueryBuilder. When you save the queries, they appear under **My lists** in the **Processes Overview** and in the navigation pane of WorkZone Client.


You can share this type of lists with other users across your organization. Shared lists appear under **Shared lists** in the **Processes overview** and in the navigation pane of WorkZone Client.

In the WorkZone Client navigation pane, click **OTHER > My lists** or **Shared lists**.

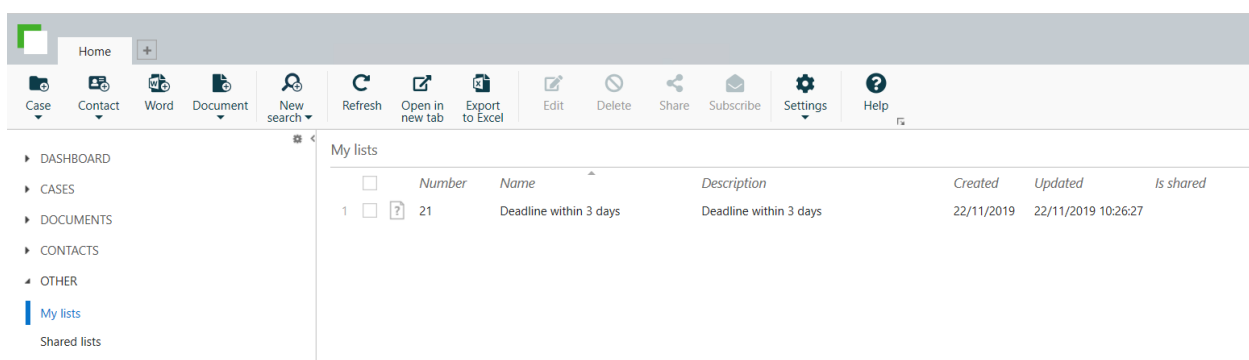

Create and save queries in WorkZone QueryBuilder

1. Open WorkZone QueryBuilder.
2. Select an entity from the list, for example **WzpWorkflowInstances**.
3. Apply a filter.
4. Click **Save Query** when your query is complete.
5. Enter a name and a description. The name of the query will be the name of the list that is shown on under **My lists** in the **Processes Overview** and under **My lists** in the navigation pane of WorkZone Client.

To display the list in the **Processes Overview**, you must add it to the navigation pane first. In the **Processes Overview**, click  to open the **Available lists** pane, and then double-click the list to add it to the navigation pane.

You can edit, share, and delete saved queries in WorkZone Client. The actions will be reflected in the **Processes Overview**. See [Save and reuse search lists](#) in the WorkZone Client User Guide. Note that when you edit a saved query in WorkZone Client, the query opens in WorkZone QueryBuilder for editing.

Example: All processes that are due in 3 days

WorkZone OData QueryBuilder TESTADMIN, TESTADMIN - Test Administrator

Endpoint: Full Strict OData V3 (V3) | Show labels | Links: Client | My Queries | Auto performance

Entity: WzpWorkflowInstances | Documentation...

Filter:

- Workflow close date (DueDate) after or equals today +/- 0 22. Nov 2019
- Workflow close date (DueDate) before today +/- 3 25. Nov 2019
- Process definitions (Process) Process type (Type_Value) in (, separated) MAIN;SUB

Select: ID (ID) | Summary (Summary) | Execution type (Access_Summary) | Workflow close date (DueDate)

Expand: +

Order by: +

V3/WzpWorkflowInstances?\$filter=DueDate ge datetime'2019-11-22T00:00:00+01:00' and DueDate lt datetime'2019-11-25T00:00:00+01:00' and (Process/Type_Value eq 'MAIN' or Process/Type_Value eq 'SUB')&\$select=ID,Summary,Access_Summary,DueDate

XML

Search (2) | Save Query | Export Query

ID	Summary	Access_Summary	DueDate
2	Hearing	Responsible or proxy	11/24/2019, 12:00:00 AM
3	Test SmartPost	Responsible or proxy	11/22/2019, 2:11:00 PM
4	Distribution Extended	Responsible or proxy	11/23/2019, 12:00:00 AM

PROCESSES

- My active
- Pending me
- My unit's active
- Pending my unit
- My open and pending tasks
- My unit's open tasks
- My completed and cancelled (1 month)
- My unit's completed and cancelled (1 month)
- Errors and warnings
- Active with me as an actor
- Active on my cases
- Active on my unit's cases
- My open tasks
- My unit's pending tasks
- My pending tasks
- All active
- All completed and cancelled (1 month)
- Deadline within 3 days**

Title	Process	Pending	Case handler	Responsible unit	Process owner	Created	Process closed
1 Test SmartPost	SmartPost		TESTADMIN, Test A...	PO1, Project Office 1	TESTADMIN, Test A...	22/11/2019 10:11:29	
2 Distribution Extended	Distribution (Extended)	ANN, Ann Secretary	TESTADMIN, Test A...	PO1, Project Office 1	TESTADMIN, Test A...	22/11/2019 10:20:55	
3 Hearing	Hearing (Basis)		TESTADMIN, Test A...	PO1, Project Office 1	TESTADMIN, Test A...	22/11/2019 10:10:43	

Important: Always add the MAIN|SUB filter:

Process definitions (Process) | Process type (Type_Value) | in (, separated) | **MAIN;SUB**

This filter ensures that you will only display main and sub processes in the overview, and not service workflows and case activities, which are not supported in the overview.

Share a list

You can share lists that you have created with WorkZone QueryBuilder with other users, groups of users, or an entire organization. Sharing a list takes place in WorkZone Client. Once you have shared a list, it appears under **Shared list** in the **Processes Overview** and in the navigation pane of WorkZone Client.

See [Share a saved search list](#) in the WorkZone Client User Guide.

Configure workflow failover

Active workflows are persisted when they are idle, and a timer in the workflow host reactivates the workflow at next due date. The timer resides on the web server with the most recent workflow activity.

Workflow failover is controlled by two parameters in the **Process settings** in WorkZone Configurator.

1. Open WorkZone Configurator.
2. In WorkZone Configurator, click **Process > Process settings**.
3. Under **Workflow host**, specify the **WatchInterval** and **WatchDelay** parameters.

Parameter	Description
WatchInterval	<p>Controls intervals between checks. If a web server is unavailable, workflows are not reactivated. In order to avoid this, all workflow hosts periodically check for workflows which are overdue.</p> <p>Enter a value between 5 minutes and 24 hours (1440 minutes). The default value is 5 minutes.</p> <p>This parameter applies to all service workflows.</p>
WatchDelay	<p>Controls the amount of time passed since the workflow should have been started.</p> <p>Enter value between 30 minutes and 24 hours (1440 minutes). The default value is 30 minutes.</p>

The duration of the delay depends on the nature of the workflows. In some cases it is acceptable to have a delay of several hours, whereas in other cases only a shorter period is

acceptable. The delay period should, however, be longer than the usual time required to reboot the server.

See [Process settings](#) in the WorkZone Configurator Administrator Guide

Configure default access to processes

To configure who can access processes on the current environment, you can change the default access setting in WorkZone Configurator.

1. Open WorkZone Configurator.
2. In WorkZone Configurator, click **Process > Process settings**.
3. Under **Workflow host**, select who should be able to access processes in the **Access** field. **DELEGATE** is selected by default.

Parameter	Description
ACTOR, Responsible	Only the current actor can access processes.
DELEGATE, Responsible or proxy	Both the current actor and the actor's delegate, if any, can access processes.
ALL, All	Access to processes is not limited to a specific actor.

See [Process settings](#) in the WorkZone Configurator Administrator Guide.

Configure notifications

You can configure when to send notifications. Users can receive notifications by email or as push notifications on mobile devices. WorkZone Process sends three types of notifications:

- Smarttasks as emails
 - Emails that contain a task with response buttons.
- Email notifications
 - Emails sent when a task is changed, for example, a task has been updated by another user.

- Push notifications

Notifications sent to a mobile device when a task has changed.

You can configure which notifications to send in WorkZone Configurator.

1. Open WorkZone Configurator.
2. In WorkZone Configurator, click **Process > Process settings**.
3. Turn on the notifications that you want to apply to users in your organization.

By default, the following settings apply:

Notifications	Turned on/off
Send smarttasks as emails	On
Send push notifications	Off
Send email notifications	Off

Before you decide which notifications to enable, consider the fact that the number of emails that are generated as notifications can easily get very high.

The settings apply to all users but individual users can change their own settings in WorkZone Client and WorkZone Mobile. See [Your personal settings](#) in the WorkZone Client User Guide and [How can I receive notifications](#) in the WorkZone MobileUser Guide.

Configure push notification certificates for WorkZone Mobile

If you want to send notifications from WorkZone Process to WorkZone Mobile, you need an Apple Push Services certificate. With the installation of WorkZone Process, two certificates are installed to the certificate store.

Usage	Certificate name
Unmanaged app	Apple Push Services: dk.kmd.WorkZone
Managed by Microsoft Intune	Apple Push Services: dk.kmd.workzone.intune

When you run WorkZone Process Configurator, the certificate used by the unmanaged app will be added to the config file by default.

If you run WorkZone Mobile as a managed app in Microsoft Intune, you need to change the default certificate to the Intune certificate. This is done in the config file.

Change the certificate in the config file

1. Open the **Scanjour.Process.Notification.AgentHost.exe.config** file located:


```
C:\Program Files (x86)\KMD\WorkZone\Process\Bin\Scan-  
jour.Process.Notification.AgentHost.exe.config
```

2. Change the value of the **ApnsServerCertificateName** parameter to the name or the thumbprint of the Intune certificate.

If you upgrade WorkZone Process, the certificate in the config file will not be changed.

Configure availability of processes

You can hide a process by setting the end date of a process or restrict user access to a process by specifying access codes. This is done in WorkZone Configurator.

1. In WorkZone Configurator, click **Process > Processes**.
2. Point to the process you want to hide, and click  **Edit parameters**.
3. Enter an end date or specify access codes.

Configure the process history document

When a process is complete, a history document is generated and saved on the current case. The history document summarizes the actions and results during the process. WorkZone Process includes a default history template document that is used for all process types. However, you can configure a specific history document for each type of process.


It is also possible to customize or create a new history document template but it requires developer assistance. See [Custom reports](#) in the WorkZone PDF Developer Guide e-Boks for information about how to create a new template and deploy it.

Not all processes generate history documents. Phase processes, for example, do not generate history documents. For other process types, for example, the extended distribution

process and the extended submission process, you can enable or disable generation of history documents. Except for the SmartPost process, no history document is generated if the process is canceled. The SmartPost process generates a history document but includes information about the process being canceled.

Configure a process-specific history document

You configure the history document in WorkZone Configurator as part of editing process parameters. See [Edit process parameters](#) in the WorkZone Configurator Administrator Guide.

1. In WorkZone Configurator, click **Process**.
2. Click **Processes**.
3. Point to the process for which you want to configure the history document. A menu bar appears.
4. Click  **Edit process parameters**, and specify the history document parameters:
 - ReportID
 - RecordType
 - RecordState
 - TitleTemplate

The process history parameters and default values are described below.

Name	Default value	Description
ReportID	302c1bc6-7049-4759-b931-42ca6cc96f60	The ID (GUID) of the history document to generate.
RecordType	PROHIST	The document type of the history document that is generated by the process.
RecordState		The document state of the history document that is generated by the process. If you do not specify a document state, the doc-

Name	Default value	Description
		ument state specified in the DocumentState setting in the general process settings will be used. See Process settings in the WorkZone Configurator Administrator Guide.
TitleTemplate	{0}: {1} {2}	<p>A template that is used to create the title of the history document. By default, the template has placeholders for the process type {0}, the process title {1}, and a date stamp {2}.</p> <p>Example:</p> <p>Hearing (Basis): Test case (25-06-2018)</p> <p>You can change this setting if you want to name the process history documents differently.</p>

Example: A history document generated by a hearing process.



Hearing

This is a hearing process

Process type: Hearing (Basis)	Case: 18-10/1
Started by: ANN	Case handler: Ann Secretary, ANN
Started: 25 Jan 2018 15:53	Process deadline: 1 Feb 2018 00:00
Completed: 25 Jan 2018 15:55	

Documents included in this process

Number	Title
32	Results (D36)

Supplementary documents included in this process

Number	Title
--------	-------

History

Assignee: Ann Secretary, ANN	Started: 25 Jan 2018 15:53
Delegate:	Completed: 25 Jan 2018 15:54
Action: Answered	Task deadline: 1 Feb 2018 00:00
Type: Hearing	
Comment:	


Documents:

Assignee: Charlotte Record Manager, CHARLOTTE	Started: 25 Jan 2018 15:53
Delegate: Ann Secretary, ANN	Completed: 25 Jan 2018 15:54
Action: Answered	Task deadline: 1 Feb 2018 00:00
Type: Hearing	
Comment:	

Documents:

The SmartPost history document looks a bit different.

Example: A history document generated by the SmartPost process.


February 21, 2018

Dispatch: Letter

Dispatch started: 21/02/2018 14:08:06	Started by: Test Administrator, TESTADMIN	Dispatch type: Send by digital mail else remote print else local print
Dispatch ended: 21/02/2018 14:09:00	Document case handler: Test Administrator, TESTADMIN	E-Boks material: WorkZone Alpha - Dev - Repliable
Overall status: Success	Approval process: No	Remote print type: Standard mail - black/white
Case number: 18-02/1	Process GUID: 2bc398ff-0de3-49c3-b0ac-9a527139f718	Delete original letter after sending: No

Recipients:

Document No.	Recipient	Role	Sent by	External ID	Status	Status-Time
30	Satellite User #1 , C-050106-8624	Recipient	EBoks	003085636548189393074815	Completed	21/02/2018 14:08:59
31	Satellite User #3 , C-070206-8630	Copy recip.	EBoks	003085636548189382122575	Completed	21/02/2018 14:08:58
32	Satellite User #2 , C-040806-8665	Recipient	EBoks	003085636548189369885563	Completed	21/02/2018 14:08:57
33	Satellite User #3 , C-070206-8630	Copy recip.	EBoks	003085636548189351162014	Completed	21/02/2018 14:08:55

Original documents:

Document No.	Title	Document case handler
27	Letter	Test Administrator, TESTADMIN
28	Attachement	Test Administrator, TESTADMIN

Approvals and other actions:

Party	Delegate	Type and Action	Comment	Start date	End date	Deadline


Page 1 of 1

Configure a process title

You can specify a title that will be suggested as default process title in the **Start process** dialog box when users start one of the following processes:

- Hearing (Basis)
- Submission (Basis)
- Submission (Extended)
- Distribution (Extended)

You define default titles for each process in WorkZone Configurator.

1. In WorkZone Configurator, click **Process > Processes**.
2. Point to the process you want to define a title for, and click  **Edit parameters**.

3. In the **SuggestedTitle** field, enter the title you want to display as the default process title in the **Title** field in the **Send SmartPost** dialog box. The title can be maximum 256 characters long. You can leave the **SuggestedTitle** parameter empty, if you do not want to display a default title.
4. Turn on the **UseSuggestedTitle** parameter to use the title specified in the **SuggestedTitle** parameter. If the **UseSuggestedTitle** parameter is turned off, the case title will be suggested as the process title.

Configure the retry period for history document creation

HistoryDocRetryPeriod

You can configure the **HistoryDocRetryPeriod** parameter in the database. The **HistoryDocRetryPeriod** parameter defines the period of time that WorkZone retries creating a history document in case of failure.

You specify the time period using the format: d.hh:mm:ss

In ScanSQL, enter:

```
update wzp_settings set Value = '<d.hh:mm:ss>' where module = 'CreateProcessHistoryDocument' AND key = 'HistoryDocRetryPeriod'
```

if you do not configure this parameter, the default period of time is 1.00:00:00 (1 day).

The retry period must be at least 5 minutes.

When the retry period expires, an error message is shown in the **Processes** overview.

Configure the use of new name instances

You can recycle names in WorkZone Process using Active Directory Replication.

To recycle names, complete the following steps:

1. Enable **AllowNewInstances** in the AD replicator.
2. In WorkZone Configurator, click **Process > Process settings**.
3. Turn on the **Allow new instances in Active Directory** parameter. The **Allow new instances in Active Directory** parameter is turned off by default.
4. For each Web server with WorkZone Process installed, open the IIS Manager and recycle the **WzpSvc** application pool.



Copy and rename a process

You can copy and rename a standard process if you want to use it in another context. For example, your organization may want to use the standard hearing process in a requisition working process. You can make a copy of the standard hearing process and rename the copied process as well as related labels that appear in the user interface so that the process matches the new context.

You can copy and rename all standard processes but note that if you copy and rename a main process, it will still use the standard sub process as opposed to a copied and renamed sub process. For example, if you copy and rename the ministerial process, the standard distribution sub process will still be used.

Copy a process

You copy processes in WorkZone Configurator.


1. Open WorkZone Configurator, and click **Process**.
2. Click **Processes**.
3. Point to the process you want to copy, and click  **Copy** in the menu.
4. Enter a name and a description of the new process, and click **Copy**.
5. Point to the process you just copied, and click  **Edit parameters** to configure the process.

You cannot make a copy of a copied process.

Rename labels

You can rename labels in copied processes so that they match the name and context of the copied process, for example a requisition workflow. You can rename the labels that appear in:

- The **Start process** dialog box
- Smarttasks

- The **Processes** overview
 1. Open WorkZone Configurator, and click **Process**.
 2. Click **Processes**.
 3. Point to the process you just copied and for which you want to rename labels, and click  **Edit labels** in the menu.
 4. Change the standard labels as needed.

About case activities

Maintain best practices and update dynamically

Case activities can help you maintain best practices for handling ad-hoc tasks and tasks based on legal requirements.

With case activities you can map the possible events in a workflow and associate each event with a rule that calls for a certain action. You can also continue to update your case activities to reflect changes in work routines. In this way you preserve knowledge about work processes and you ensure that new best practices are implemented immediately in the handling of daily tasks and work routines.


Rule-based activities

With case activities you can create workflows based on activities that are connected by a set of rules. The rules define the relationship between the activities. For example, the rules can ensure that activities in a workflow are completed in a specific sequence or that specific activities exclude other activities.


The case activity graph

Case activities are modeled in a case activity graph and once the graph is deployed, the case activities can be executed in WorkZone Client.

In the following illustration, you see a case activity graph with tasks, roles, and connections. The roles MPA and GST specify which employees are to execute the tasks, and the connections define the rules of the flow.

 - Condition: Indicates that a second activity can only be executed if the previous activity has been addressed.

 - Exclude: Excludes other activities upon execution

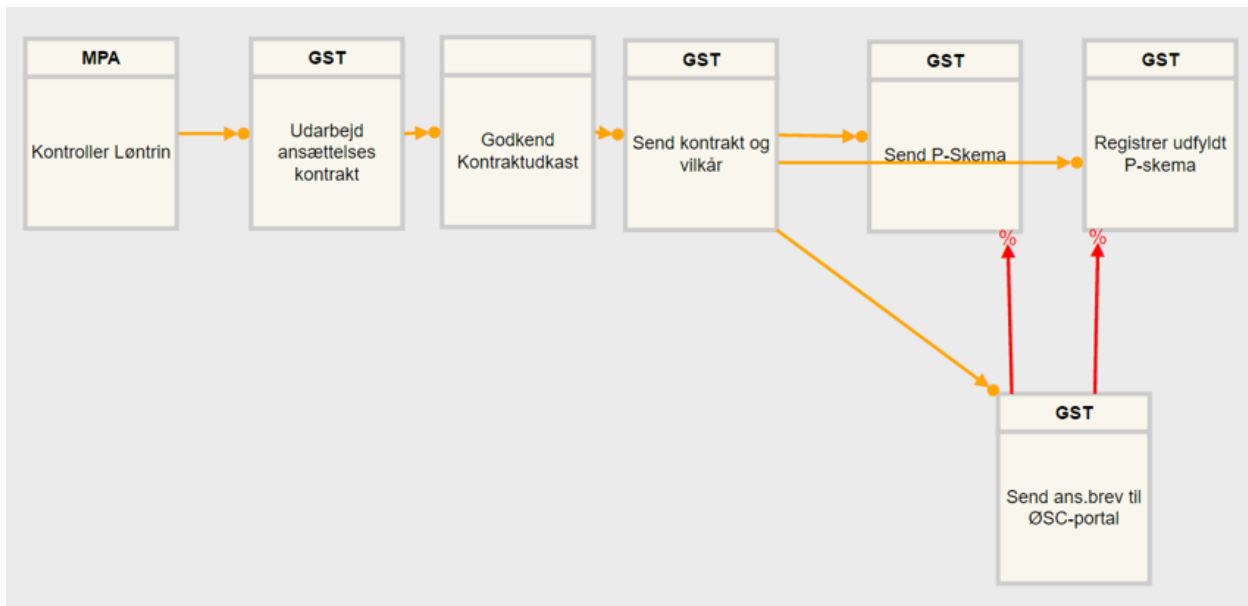

Work with case activities in WorkZone Client


When the case activity graph is deployed, users with the roles that are assigned to the activities in the graph can see their activities in WorkZone Client.

To start case activities, click **Activities** on the **Activities** tab on the case detail tab in WorkZone Client and select an activity list. You can start multiple activities on a case .

Below you can see a case activity in WorkZone Client.

Opgaver	Deadline	Rolle	Udført	Af
Send kontrakt og vilkår	02-11-2016 15:25:32	GST		
Tildel brugernavn	03-11-2016 16:51:17	MPA	01-11-2016 14:55:27	Elisabeth Section Man...
Send P-Skema	04-11-2016 18:17:01	GST		
Registrer udfyldt P-skema	05-11-2016 19:42:46	GST		
Kontroller Løntrin	06-11-2016 21:08:30	MPA	01-11-2016 14:54:47	Elisabeth Section Man...
Udarbejd ansættelses kontrakt	07-11-2016 22:34:15	GST	01-11-2016 14:55:47	Elisabeth Section Man...
Send ans.brev til ØSC-portal	08-11-2016 23:59:59	GST		

When you double-click an activity, a form opens from where you can execute the activity.

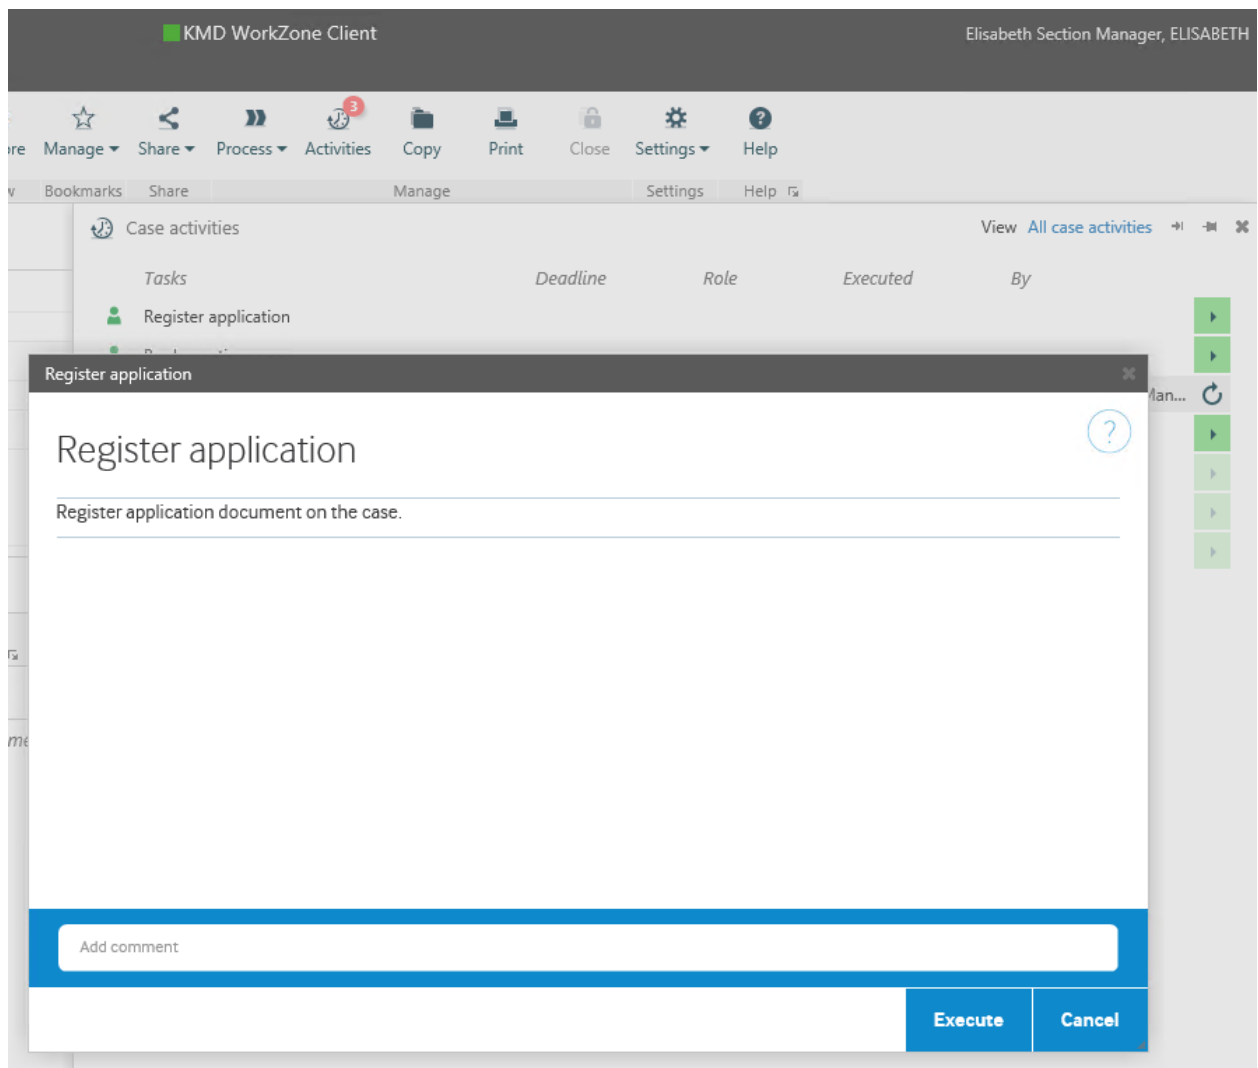

For more information about executing case activities, see [Work with case activities](#) in the WorkZone Client User Guide.

About case activities

Maintain best practices and update dynamically

Case activities can help you maintain best practices for handling ad-hoc tasks and tasks based on legal requirements.

With case activities you can map the possible events in a workflow and associate each event with a rule that calls for a certain action. You can also continue to update your case activities to reflect changes in work routines. In this way you preserve knowledge about work processes and you ensure that new best practices are implemented immediately in the handling of daily tasks and work routines.


Rule-based activities


With case activities you can create workflows based on activities that are connected by a set of rules. The rules define the relationship between the activities. For example, the rules can ensure that activities in a workflow are completed in a specific sequence or that specific activities exclude other activities.


The case activity graph

Case activities are modeled in a case activity graph and once the graph is deployed, the case activities can be executed in WorkZone Client.

In the following illustration, you see a case activity graph with tasks, roles, and connections. The roles MPA and GST specify which employees are to execute the tasks, and the connections define the rules of the flow.

 - Condition: Indicates that a second activity can only be executed if the previous activity has been addressed.

 - Exclude: Excludes other activities upon execution

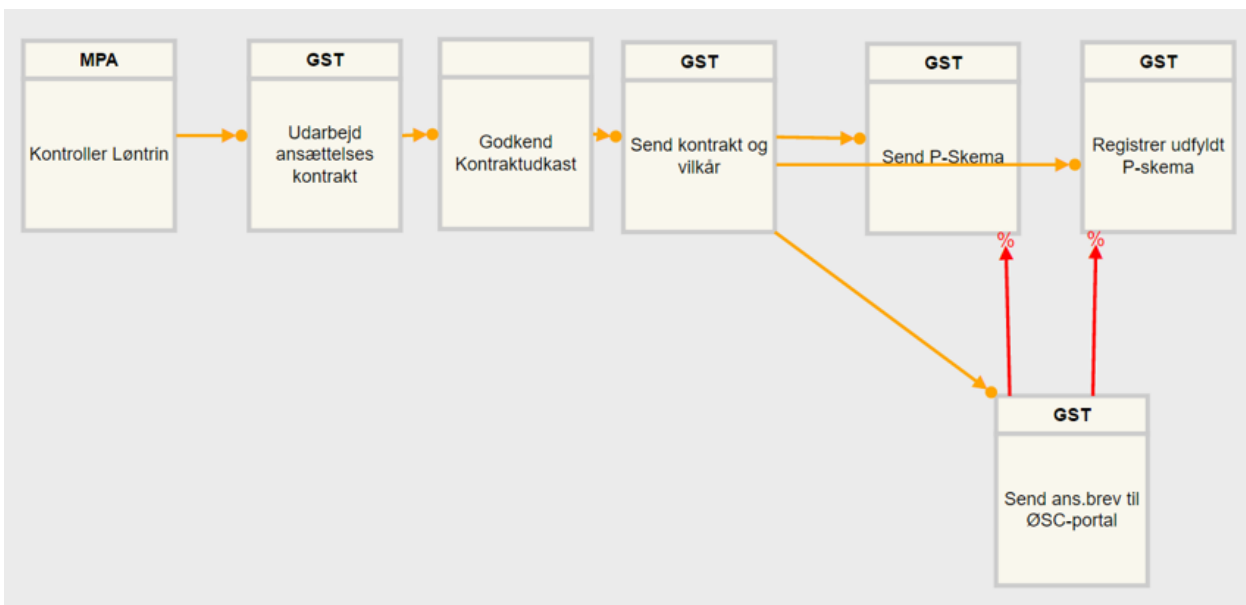


Work with case activities in WorkZone Client


When the case activity graph is deployed, users with the roles that are assigned to the activities in the graph can see their activities in WorkZone Client.

To start case activities, click **Activities** on the **Activities** tab on the case detail tab in WorkZone Client and select an activity list. You can start multiple activities on a case .

Below you can see a case activity in WorkZone Client.

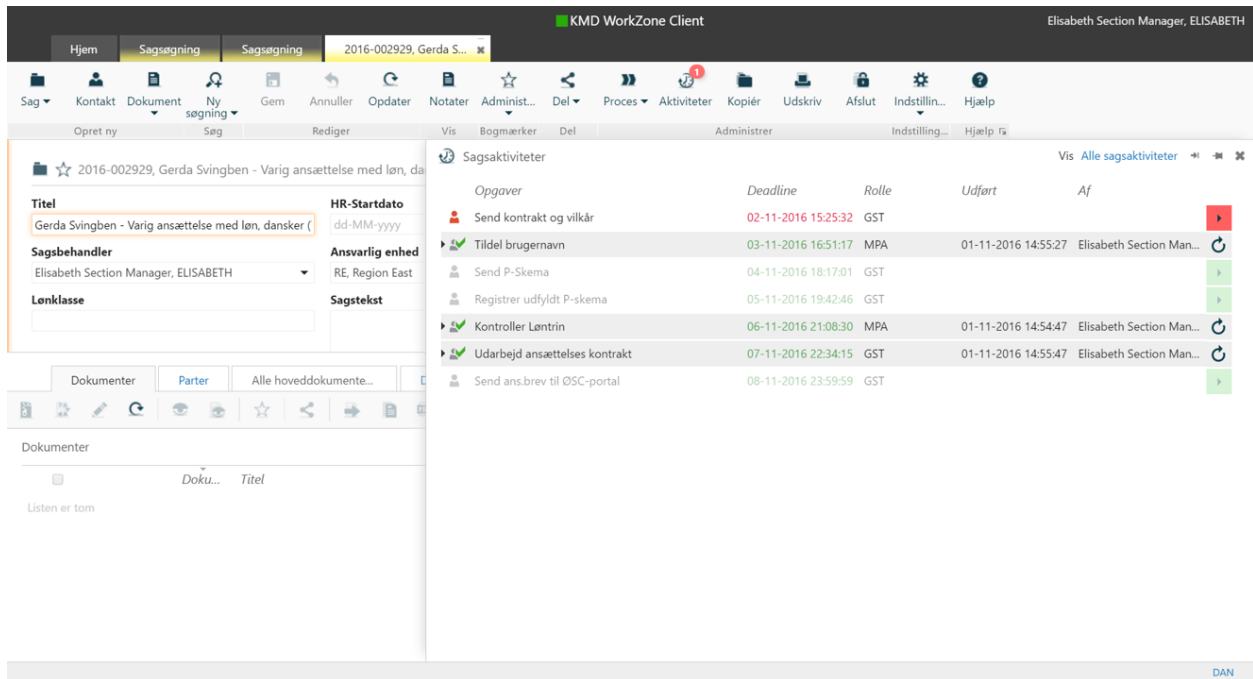

When you double-click an activity, a form opens from where you can execute the activity.

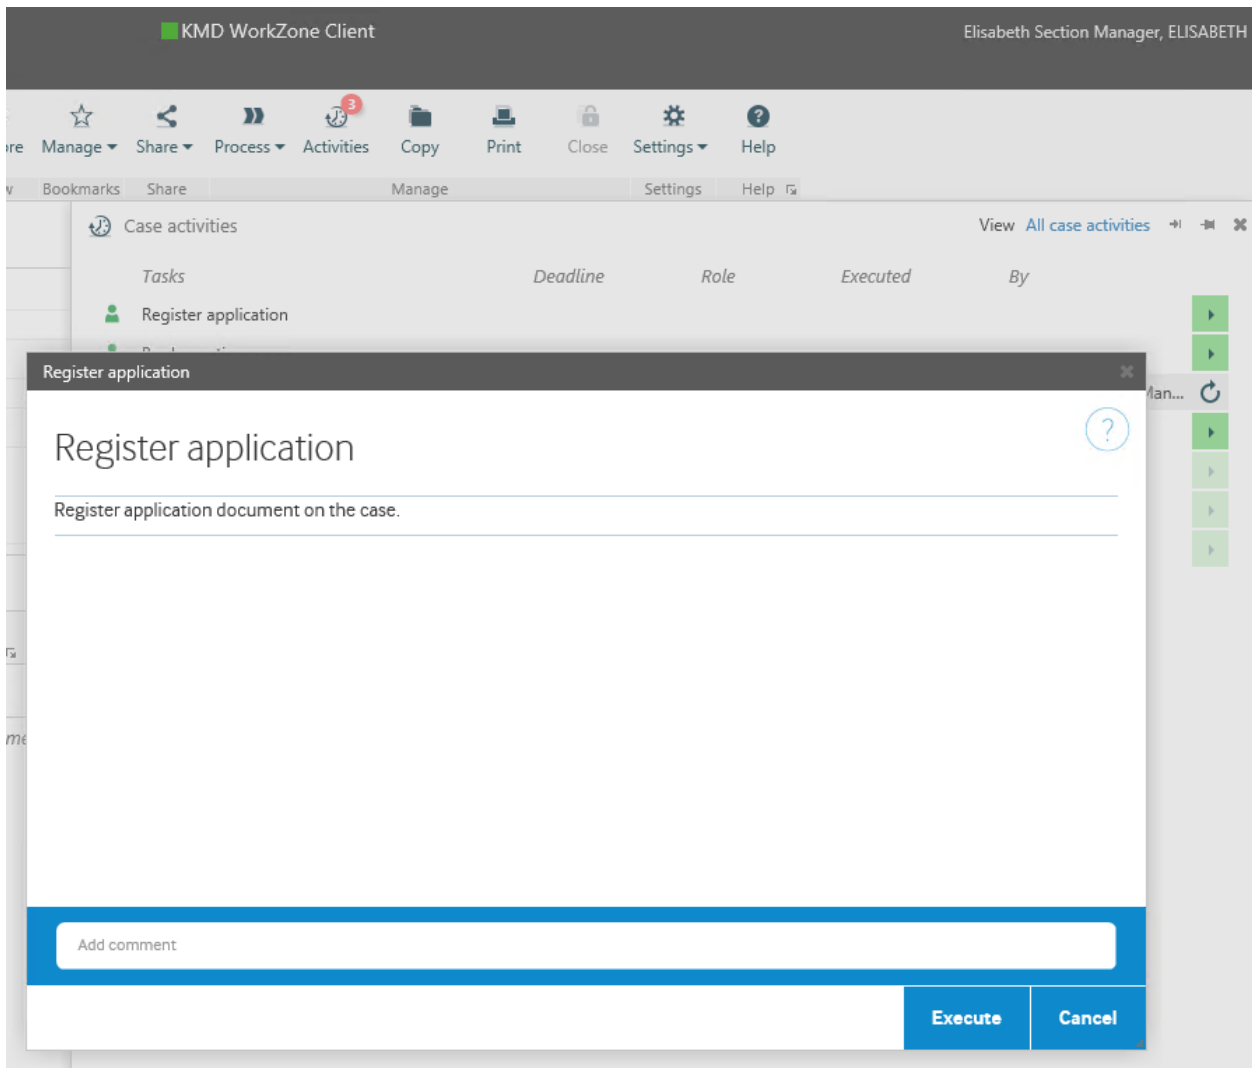

For more information about executing case activities, see [Work with case activities](#) in the WorkZone Client User Guide.

Getting started with case activity graphs

You can model case activities using DCR (Dynamic Condition Response) Graphs. DCR Graphs is a third-party tool.

In order to use the DCR designer for production, your organization must own a license. You can buy DCR Designer licenses from [DCR Solutions](#).

1. Open [DCR Graphs](#) in Google Chrome.
2. Create a profile.

You can work with your own personal graphs or with graphs that have been shared by others users.

Create a DCR graph

The first step in modeling case activities is to create a graph and add the activities that you want for the case activity workflow.

1. Log in to the DCR Portal Dashboard from [DCRGraphs.net](#).
2. At the top of the dashboard, click **Create Graph**.
3. Enter a name for the new graph, and then click **Save**.

- Or -

Click the **Templates**, and then select **WorkZone Case Activities Template**.
See [Create a graph using the WorkZone template](#).


4. Add activities and create connections between the activities to model your case activity graph.


For information about creating DCR graphs, see the [DCR documentation](#).

To export your DCR graph and make it available in WorkZone, see [Export and deploy case activity graphs](#).


Create a graph using the WorkZone template

WorkZone provides a template that you can use to get started with a case activity graph, which provides WorkZone specific activity types.

1. Log in to the DCR Portal Dashboard from DCRGraphs.net.
2. At the top of the dashboard, click **Create Graph**.
3. In the **New graph** dialog box, click **Templates**.
4. Select the **WorkZone Case Activity Template**, and then click **Save**. The template is loaded, and you can start adding activities and connections.
5. Click  to insert an activity.
6. In the **Activity Options** pane, add a label and a description, which will be displayed in the activity list in WorkZone Client.
7. If you want the activity to be executed automatically, select the role named **AUTO**.

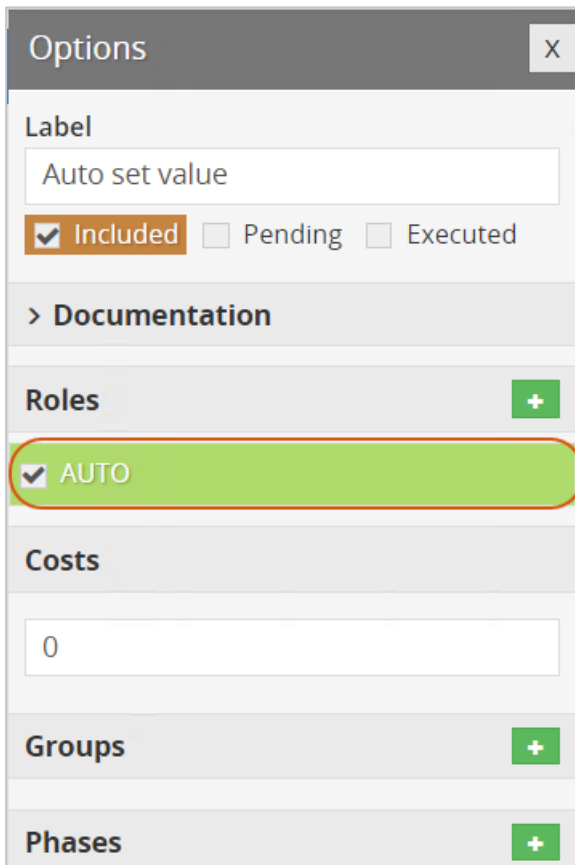

8. Click **Advanced** and scroll to the bottom of the **Activity Options** pane, and then select an activity type in the **Type** field.

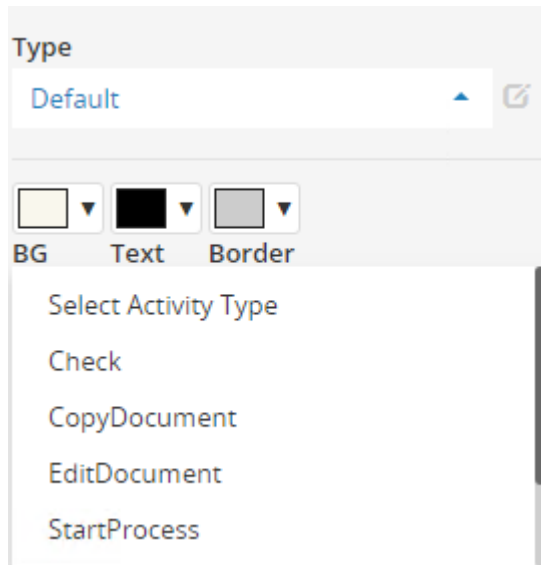

See Activity types for a description of the activity types.

9. Select a WorkZone activity, for example **CopyDocument**, and a list of parameters for the selected type is shown.

Id	Value	Required
DocumentQuery	/Records	Yes
DefaultDocumentName	Copied Document	Yes
DocumentType	DOK	Yes
DocumentState	UA	Yes
MaxDocumentsToCopy	1	Yes

10. Fill in the parameters. See Activity types for an overview of the parameters.
11. When you have completed the graph, click **File > Save As** to save your DCR graph.

To make your DCR graph available in WorkZone, you need to export it first, see Export and deploy case activity graphs.

Activity types

With the WorkZone template, you get a number of WorkZone-specific activity types.

Check

Check is the basic activity type, which you can use for creating items on a check list. You can, for example, use it for providing information that must be read before moving on to the next activity. You can add instructions and links to more information in this activity. This is the default activity type.

Check parameters

No parameters

CompleteGraph

CompleteGraph completes the graph. You can use this activity to allow users to complete a case activity list even if some activities have not been executed, for example, if the activities were not needed in a work process.

CompleteGraph parameters

No parameters

CopyDocuments

CopyDocuments copies documents that are retrieved by a query to the current case. The documents are copied without the source meta data. The access code is verified on the basis of the case handler's or the case owner's access rights. For example, you can use this activity type to copy standard documents, such as templates to a case.

CopyDocuments parameters

Parameter	Description	Required
DocumentSource	OData query that identifies the documents to copy.	Yes

Parameter	Description	Required
	<p>Example: /Records?\$filter=RecordType_Value eq 'SKAB' &\$select=ID,UserKey,Summary copies templates with the document type SKAB to the current case.</p>	
DefaultDocumentName	<p>If you copy only one document, you can specify a default name that will be applied to the copied document.</p> <p>If you copy more than one document, the original name will be used.</p>	Yes
DocumentType	The document type that will be applied to the copied documents.	Yes
DocumentState	The document state that will be applied to the copied documents.	Yes
MaxDocumentsToCopy	<p>Defines the maximum number of documents to copy. The default value is 1.</p> <p>If the maximum number of documents to copy is exceeded, no documents will be copied.</p>	Yes

EditDocuments

EditDocuments provides a list of documents for editing. The documents on the list are retrieved by a query, for example, documents on a specific case, documents with me as the case handler, and so on.

EditDocuments parameters

Parameter	Description	Required
DocumentQuery	<p>OData query that searches for the documents to edit. By default all documents are listed.</p> <p>Example: /Records?\$filter=FileKey_Value eq '</p>	Yes

Parameter	Description	Required
	<code>{Case.ID}</code> ' retrieves the documents on the current case. Where <code>Case.ID</code> refers to the current case.	

StartProcess

StartProcess starts a process or another case activity list. When a user executes the activity, the **Start process** dialog box opens with the specified process.

Automatic execution

You can execute the **StartProcess** activity type automatically but it will only work if the process you start does not have any parameters. If you specify a process with parameters, an error message will be written to the activity history when the activity tries to start the process automatically. Note that all standard processes have parameters. Automatic execution works when starting a case activity list or a customized process without parameters. See [Execute activities automatically](#) for information about using the AUTO and L-AUTO roles.

StartProcess parameters

Parameter	Description	Required
ProcessGUID	The GUID of the process you want the activity to start. You can look up the GUIDs in WorkZone Configurator, see FAQs about case activities .	Yes
ProcessOwner	Specify the process owner using the NameCode of the process owner or using the case handler on the current case using the notation <code>Case.Officer_Value</code> . If you add the AUTO or L-AUTO roles, it is required to specify this parameter. Automatic start of the process will fail if the ProcessOwner parameter is not specified.	No

SendSmartPost

SendSmartPost starts a SmartPost process. In this release, you can send a letter to recipients. By default the **SendSmartPost** activity is executed automatically.

SendProcess parameters

Parameter	Description	Required
Letter	<p>OData query that specifies which document to send as the letter in the SmartPost message.</p> <p>Example: <code>/Records?\$filter=FileKey_Value eq '{Case.ID}' and (Title eq 'Standard letter')</code></p> <p>The query retrieves a document with the title <i>Standard letter</i> from the current case.</p>	Yes
Attachments	<p>OData query that specifies which attachments to include in the message.</p> <p>Example: <code>/Records?\$filter=FileKey_Value eq '{Case.ID}' and (Title eq 'Attachment 1' or title eq 'Attachment 2')</code></p> <p>The query retrieves two documents with the titles Attachment 1 and Attachment 2 from the current case.</p>	No
Recipients	<p>Specify the recipients of the message.</p> <p>You can use an OData query or you can enter the party roles separated by comma. If a party with a specific role is not found on the case or the role is invalid, you can specify which role to use instead after a slash /. You specify as many alternative roles as you need separated by slashes.</p> <p>Example: OData query</p> <pre>/Addresses?\$filter=Name/Files/any(a: a/FileKey_Value eq '{Case.ID}' and a/Cus- tomLabel_Value eq 'Reply-To')</pre> <p>The query retrieves addresses of parties with the role <i>Reply to</i> on the current case.</p> <p>Example: Simple notation</p> <p><code>Reply-To, Høringspart/Sagspart</code> which retrieves addresses of parties with the roles <i>Reply to</i> and <i>Hearing</i></p>	Yes

Parameter	Description	Required
	<p><i>party</i>.</p> <p>If no parties with the role <i>Hearing part</i> (Høringspart) are found parties with the role <i>Sagspart</i> will be retrieved instead.</p> <p>You must specify the codes for the roles and not the localized labels. You can see the codes in WorkZone Configurator. Go to Case > Parties and references.</p>	
CopyRecipients	<p>Specify the copy recipients of the message.</p> <p>You can use an OData query or you can enter the party roles separated by comma and alternative roles separated by slashes in the same way as for Recipients.</p> <p>If the total number of recipients and copy recipients exceeds the maximum allowed number of 50 recipients, the message will not be sent.</p>	No
ProcessGuid	<p>Specify the GUID of the SmartPost process you want the activity to start. Use this parameter if your organization has several SmartPost processes and you want to use to a specific SmartPost process.</p> <p>If you do not specify a GUID, the GUID of the default SmartPost process is used.</p> <p>You can look up the GUIDs in WorkZone Configurator, see FAQs about case activities.</p>	No
ProcessOwner	<p>Specify the process owner of the SmartPost process. Possible values are:</p> <ul style="list-style-type: none"> • NameCode—Enter the NameCode of the employee who will be the process owner using upper case letters. • {Case.Officer_Value}—The case handler on the case where the case activity is started becomes the process owner. 	Yes

Parameter	Description	Required
	<ul style="list-style-type: none"> {DocumentCaseHandler}—The case handler on letter document that will be sent by SmartPost becomes the process owner. <p>If the values are invalid, an error message will be written to the history.</p>	

UpdateEntities

UpdateEntities updates values of specific text fields on a case, for example if you want the case title and the case state of the current case to change after an action has been completed.

The activity type can be used to update both standard and custom fields.

The following types of fields cannot be updated:

- Computed and read-only properties. See the WorkZone QueryBuilder documentation for information about which properties of the **Files** entity are computed.
- Other entities, for example **Case text** and **Information**, if they are empty.
- Custom droplists.

Current user and organizational unit

You can update fields on a case using @me and @unit to insert the current user as case handler on a case and the current user’s organizational unit as the responsible unit.

To add the current user as case handler on the case and the current user’s organizational unit as the responsible unit, define the parameters as follows:

Parameters ✕

Id	Value	Required
Entity	Files	Yes
Filter	ID eq '{Case.ID}'	Yes
Properties	{"Officer_Value": "@Me", "ResponsibleOu_Value": "@Unit", "ActionOu_Value": "@Unit"}	Yes

Save

When using @Me or @Unit, do not set the **UpdateEntities** activity to execute automatically. It is a system user who executes activities with the **AUTO** role assigned, and therefore @Me and @Unit will fail. See [Execute activities automatically](#).

UpdateEntities parameters

Parameter	Description	Required
Entity	Specify which entity you want to get values from, for example Files (Cases).	Yes
Filter	<p>Enter the file key of the case whose values you want to update. If you always want to update the current case, meaning the case on which the case activity is started, you can enter:</p> <pre>ID eq '{Case.ID}'</pre> <div style="border: 1px solid #0070c0; padding: 10px; margin: 10px 0;"> <p>Tip: You can use WorkZone QueryBuilder to build your query and copy the filter part to this parameter. See How do you copy a query from WorkZone QueryBuilder.</p> </div>	Yes
Property	<p>Specify the properties and values you want to update in JSON format. For example, if you want to update the case state and the case title, enter:</p> <pre>{"State_Value": "UB", "Title": "Updated"}</pre> <p>Which will update the State field with the state <i>UB, Being processed</i> and the Title to <i>Updated</i>.</p> <p>If, for example, you want to update the Title field with the date and time that the current case was updated and the current state, enter:</p> <pre>{"Title": "Title: {Case.Title}, updated: {Case.UpdateTime}, State: {Case.State_Value}"}</pre> <p>Which will update the case title to, for example: <i>Title: Case title, updated: 25-03-2020 11.50.00, State: UB, Being processed</i>.</p> <div style="border: 1px solid #0070c0; padding: 10px; margin: 10px 0;"> <p>Tip: You can use WorkZone QueryBuilder to build your query,</p> </div>	Yes

Parameter	Description	Required
	convert it to JSON format, and copy it to this parameter. See How do you copy a query from WorkZone QueryBuilder.	

ValidateEntities

ValidateEntities allows you to validate values on a case based on a condition that you define, and if the condition is met, the subsequent activities will be included or excluded. The **ValidateEntities** activity type works in connection with guards that you define on the Include and Exclude relation types.

Guards

On the Include and Exclude relation types, you need to define guards that validate against the condition you have defined in an activity that holds the activity type **ValidateEntities**.

On the Include relation type, enter:

```
<Activity ID>=1
```

On the Exclude relation type, enter:

```
<Activity ID>!=1
```

This also works vice versa, depending on what you want the graph to do.

`<Activity ID>` is the ID of the activity that holds the **ValidateEntities** activity type.

`=1` means that the condition you have defined in the activity is met (it is TRUE).

`!=1` means that the condition you have defined in the activity is not met (it is FALSE).

ValidateEntities parameters

Parameter	Description	Required
Entity	Specify which entity you want to get values from, for example Files (Cases).	Yes
Filter	Enter the file key of the case whose values you want to update. If you always want to update the current case, that	Yes


Parameter	Description	Required
	<p>is the case on which the case activity is started, you can enter:</p> <pre>ID eq '{Case.ID}'</pre> <div data-bbox="438 465 1270 745" style="border: 1px solid #0070c0; padding: 10px; margin-top: 10px;"> <p>Tip: You can use WorkZone QueryBuilder to build your query and copy the filter part to this parameter. See How do you copy a query from WorkZone QueryBuilder.</p> </div>	
Property	<p>Specify the properties and values you want to validate in JSON format. For example, if you want to validate the value of the case state and the responsible unit, enter:</p> <pre>{"State_Value": "FB", "ResponsibleOu_Value": "AS"}</pre> <p>In connection with guards, it will validate if the state is <i>FB</i> and if the responsible unit is <i>AS</i> and then include or exclude the following activities depending on the outcome.</p> <p>Another example may be to validate the current case state in the title:</p> <pre>{"Title": "Case with state: {Case.State_Value}"}</pre> <p>In connection with guards, it will validate if the title is <i>Case with state: <currentState></i> and then include or exclude the following activities depending on the outcome.</p> <div data-bbox="438 1626 1270 1906" style="border: 1px solid #0070c0; padding: 10px; margin-top: 10px;"> <p>Tip: You can use WorkZone QueryBuilder to build your query, convert it to JSON format, and copy it to this parameter. See How do you copy a query from WorkZone QueryBuilder.</p> </div>	Yes
ValidationInterval	Specify at which interval you want the ValidateEntity activ-	No

Parameter	Description	Required
	<p>ity to be executed automatically. Use this parameter if you await specific information to be available on a case before the next activity can be executed. For example, a receipt for payment must be saved on the case before the case handling can continue.</p> <p>Enter the interval in number of minutes. The minimum interval is 30 minutes.</p> <p>The automatic execution will end when the ValidateEntity activity is no longer active, for example, if is not executable or not included in the graph, or when the entire graph is completed.</p> <p>If you have several ValidateEntity activities in a graph, the activity with the lowest interval will determine when the entire graph will be updated. The graph will also be updated if only one of the ValidateEntity activities has this parameter filled in.</p> <p>If you do not specify this parameter, the user will need to click the Update button in WorkZone Client to update the activity list manually.</p>	

Example: ValidateEntities

The example below illustrates the use of the **ValidateEntities** activity type together with guards. The title and the state of the current case will be changed and a document will be copied to the case if the case has the state *FB* and the responsible unit is *AS*.

The DCR graph looks like this:

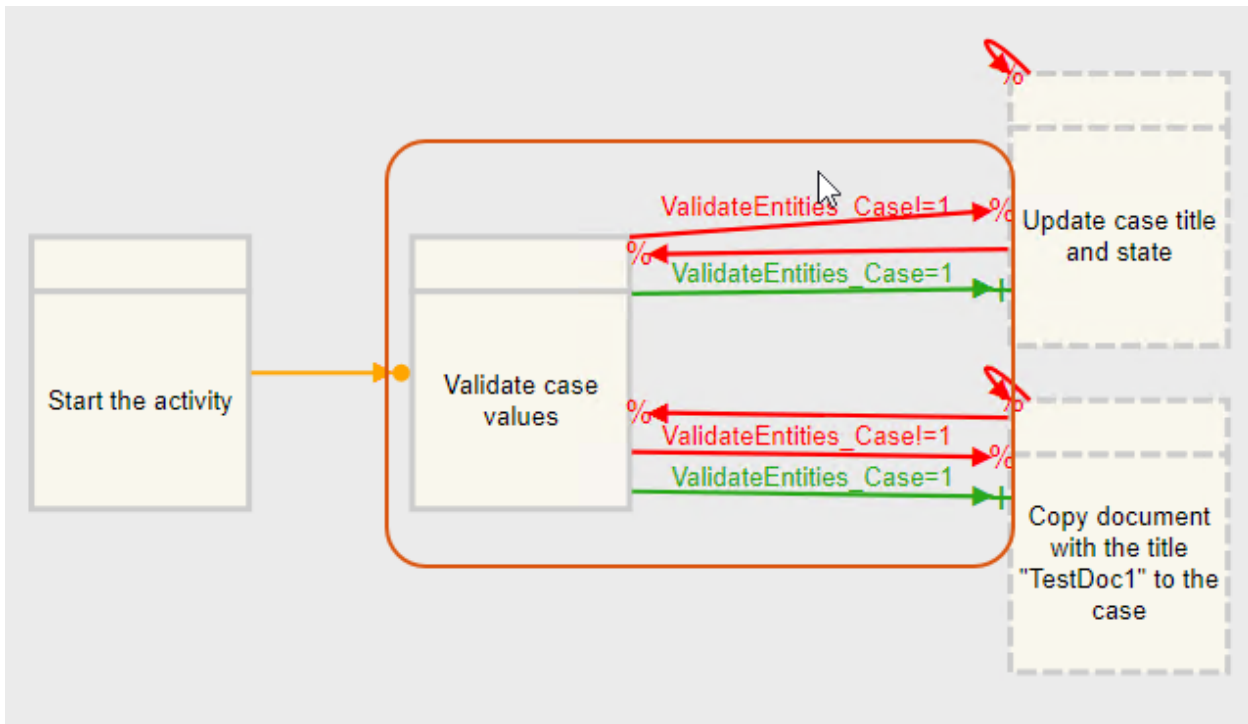

The **Validate case values** activity is a **ValidateEntities** activity type that validates if the current case has the state *FB* and the responsible unit is *AS*. The parameters are defined as follows:

Parameters		
Id	Value	Required
Entity	Files	Yes
Filter	ID eq '{Case.ID}'	Yes
Properties	{"State_Value": "FB", "ResponsibleOu_Value": "AS"}	Yes
ValidationInterval		No

[Save](#)

The Include and Exclude relation types have guards that check if the condition above is met.

- Include relation type:

```
ValidateEntities_Case=1
```

- Exclude relation type:

```
ValidateEntities_Case!=1
```

If the condition is met, the **Validate case values** activity will hold the value 1, and the **Update case title and state** activity and the **Copy document with title "TestDoc1"** activity will be included. If the condition is not met, it will result in !=1 and nothing will happen.

The **Update case title and state** activity is an **UpdateEntities** activity type that changes the case title to *Condition met* and the state changed to *ARK*. The parameters are defined as follows:

Parameters		
Id	Value	Required
Entity	Files	Yes
Filter	ID eq '{Case.ID}'	Yes
Properties	{"State_Value":"ARK","Title":"Condition met"}	Yes
ValidationInterval		No

[Save](#)

The **Copy document with title "TestDoc1"** activity is a **CopyDocument** activity type that copies a document named *TestDoc1* to the case and name the document *Copied document*. The parameters are defined as follows:


Parameters		
Id	Value	Required
DocumentQuery	/Records?\$filter=substringof('TestDoc',Title)	Yes
DefaultDocumentName	Copied Document	Yes
DocumentType	DOK	Yes
DocumentState	UÅ	Yes
MaxDocumentsToCopy	1	Yes

[Save](#)

Example: ValidateEntities – Combine rules in a guard

The example below illustrates the use of the **ValidateEntities** activity type together with complex rules that are combined in a guard. The title will be changed to "Condition met - Fully processed" and the state of the current case will be changed to *FB, Fully processed* automatically if the case has the state *UB* or the case has the state *AB*.

The DCR graph looks like this:

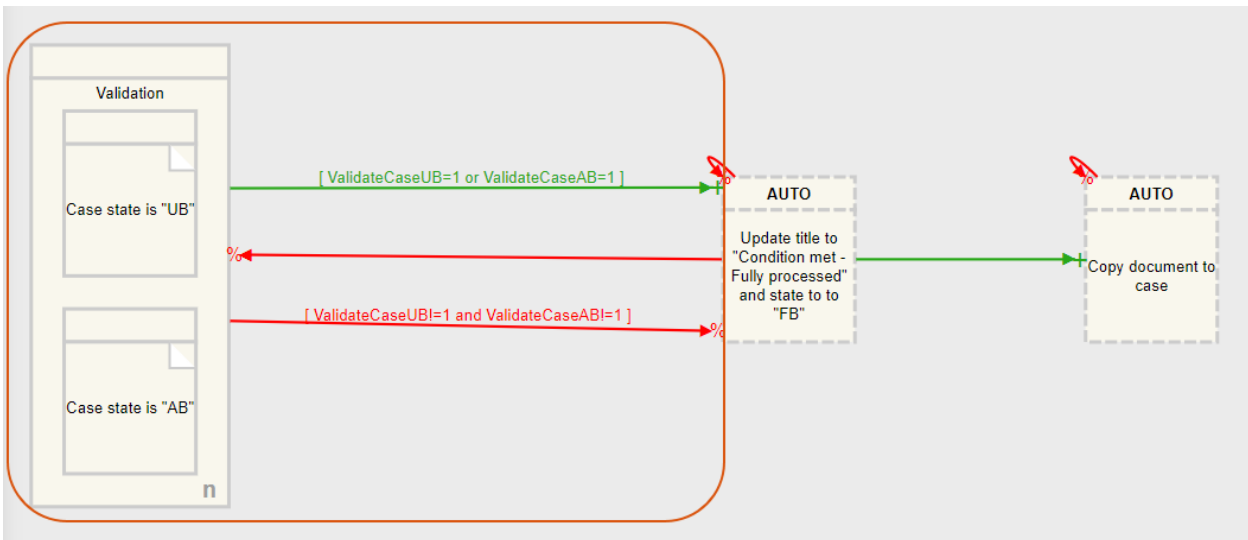

The **Validation** activity is a nested activity that holds two activities of the type **ValidateEntities**. Each nested activity contains a condition.

The first activity **Case state is "UB"** validates if the current case has the state *UB*. The parameters are defined as follows:

Parameters		
Id	Value	Required
Entity	Files	Yes
Filter	ID eq '{Case.ID}'	Yes
Properties	{"State_Value": "UB"}	Yes
ValidationInterval		No

The second activity **Case state is "AB"** validates if the current case has the state *AB*. The parameters are defined as follows:

Parameters		
Id	Value	Required
Entity	Files	Yes
Filter	ID eq '{Case.ID}'	Yes
Properties	{"State_Value": "AB"}	Yes
ValidationInterval		No

The Include and Exclude relation types have guards that validate if the above condition is met.

- Include relation type:

`ValidateCaseUB=1 or ValidateCaseAB=1`

- Exclude relation type:

`ValidateCaseUB!=1 and ValidateCaseAB!=1`

The condition is met if either the **ValidateCaseUB** activity or the **ValidateCaseAB** activity hold the value 1, the **Update state and title** activity and the **Copy document to case** activity will be included. If none of the conditions are met, it will result in `!=1`, and nothing will happen.

The **Update state and title** activity is an **UpdateEntities** activity type that changes the case title to *Condition met - Fully processed* and the state of the current case to *FB, Fully processed*. The parameters are defined as follows:

Parameters		
Id	Value	Required
Entity	Files	Yes
Filter	ID eq '{Case.ID}'	Yes
Properties	{"Title":"Condition met - Fully processed","State_Value":"FB"}	Yes
ValidationInterval		No

The **Copy document to case** activity is a **CopyDocument** activity type that copies a specific document to the case and names the document *Standard letter*. The parameters are defined as follows:

Parameters		
Id	Value	Required
DocumentQuery	Records?\$filter=RecordKey eq '47'&\$select=ID,UserKey, Summary	No
DefaultDocumentName	Standard letter	No
DocumentType	DOK	No
DocumentState	UÅ	No
MaxDocumentsToCopy	1	No

[Save](#)

Do not use @Me or @Unit in the **ValidateEntities** activity. The **ValidateEntities** activity is always executed automatically by a system user, and therefore @Me and @Unit will fail. See [Execute activities automatically](#).

GetValue

GetValue allows you to fetch a value from an entity, for example a case. You can then use this value in guards to make conditions based on WorkZone data. If the condition is met, the subsequent activities will be included or excluded.

GetValue parameters

Parameter	Description	Required
Entity	Specify which entity you want to fetch a value from, for example Files (Cases).	Yes
Filter	Enter the key of the entity you want to get a value from. If you always want to fetch a value on the current case, which is the case on which the case activity is started, you can enter: <code>ID eq '{Case.ID}'</code>	Yes

Tip: You can use WorkZone QueryBuilder to build your query and copy the filter part to this parameter. See [How do you copy a query from WorkZone QueryBuilder](#).


Parameter	Description	Required
Property	Specify the property field that you want to fetch a value from. For example, if you want to get the case state, enter: State_Value	Yes

You can use WorkZone QueryBuilder to find the name of the available properties.

Example

The example below illustrates the use of the **GetValue** activity type together with guards. A date is fetched from the **Created** property on the current case and compared with a date fetched from the **PlannedCompleted** property. The dates are compared using the guards. If the condition in the guard is met, a hearing process is started.

The DCR graph looks like this:

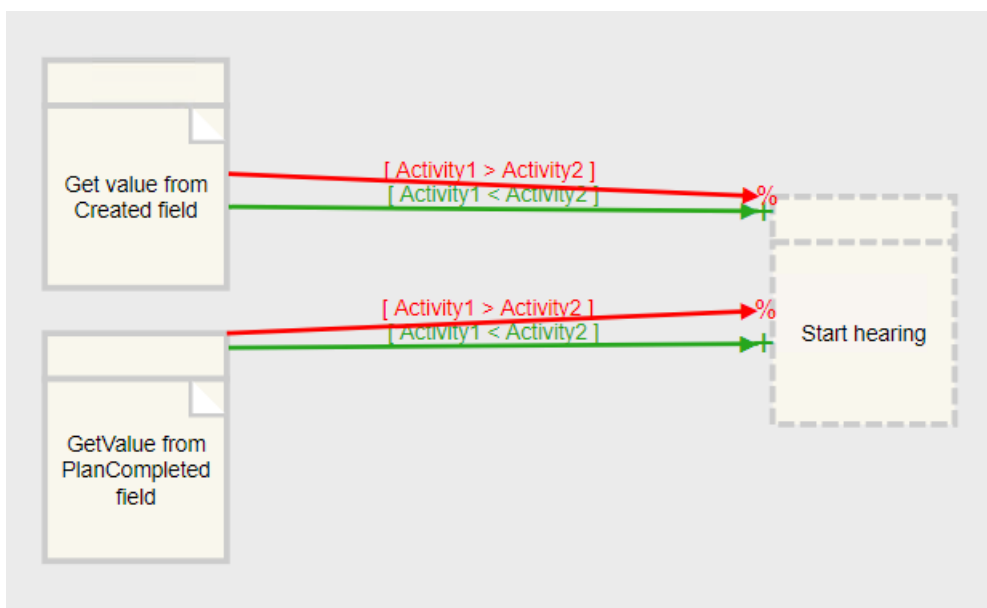

Activity1 (GetValue from Created field) fetches the date from the **Created** field on the current case. The parameters are defined as follows:

Parameters		
Id	Value	Required
Entity	Files	Yes
Filter	ID eq '{Case.ID}'	Yes
Property	Created	Yes

[Save](#)

Activity2 (GetValue from PlanCompleted) fetches the date from the **PlanCompleted** field on the current case. The parameters are defined as follows:

Parameters		
Id	Value	Required
Entity	Files	Yes
Filter	ID eq '{Case.ID}'	Yes
Property	PlanCompleted	Yes

[Save](#)

The Include and Exclude relation types have guards that compare the dates.

- Include relation type:

```
Activity1<Activity2
```

- Exclude relation type:

```
Activity1>Activity2
```

If the date fetched by activity1 is less than the date fetched by activity2, the subsequent activity will be included, in this example a **StartProcess** activity is executed, which starts a hearing process. If the condition is not met, nothing will happen.

Do not use @Me or @Unit in the **GetValue** activity. The **GetValue** activity is always executed automatically by a system user, and therefore @Me and @Unit will fail. See Execute activities automatically.

SetValue

SetValue allows you to set a value based on a query in a WorkZone field. You can use the **Computations** field on the **SetValue** activity to provide an expression, for example combining a **GetValue** activity and actual values. The value that is calculated in the **Computations** field, will be the value that will be set in the specified WorkZone field.


SetValue parameters

Parameter	Description	Required
Entity	Specify on which entity you want to set a value, for example Files (Cases).	Yes
Filter	<p>Enter the key of the entity. If you always want to set a value on the current case, which is the case that the case activity is started on, you can enter:</p> <pre>ID eq '{Case.ID}'</pre>	Yes
<div style="border: 1px solid #ccc; padding: 10px; background-color: #f9f9f9;"> <p>Tip: You can use WorkZone QueryBuilder to build your query and copy the filter part to this parameter. See How do you copy a query from WorkZone QueryBuilder.</p> </div>		
Property	<p>Specify the property that you want to insert the value in to. For example, if you want to set a date in the Planned completed property, enter:</p> <pre>PlanComplete</pre>	Yes
<div style="border: 1px solid #ccc; padding: 10px; background-color: #f9f9f9;"> <p>You can use WorkZone QueryBuilder to find the name of the available properties.</p> </div>		
MaxEntitiesTo Update	The maximum number of entities that the activity can set. For example, if you set this parameter to 10, and your query results in 10 cases or less, all cases will be updated. If the result of the query exceeds the maximum, the activity will fail , and an error message will be shown in the history.	

Example

In this example, the created date of the current case is retrieved using a **GetValue** activity. The **Created** value is used to calculate the planned complete date which will be 7 days later. The new date will be stored in the **PlannedComplete** property on the case.

The DCR graph looks like this:

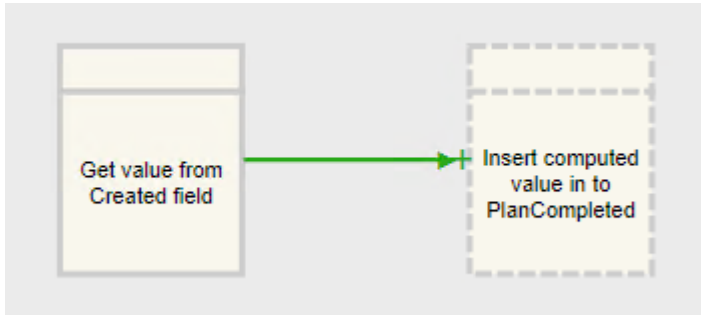

Activity0 (GetValue from Created field) fetches the date from the **Created** field on the current case. The parameters are defined as follows:

Parameters		
Id	Value	Required
Entity	Files	Yes
Filter	ID eq '{Case.ID}'	Yes
Property	Created	Yes


[Save](#)

Activity1 (Insert computed value to PlanCompleted) sets the new date in the **PlanCompleted** property on the current case based on the calculation of the date in the **Computations** field of the **SetValue** activity. The parameters are defined as follows:

Parameters		
Id	Value	Required
Entity	Files	Yes
Filter	ID eq '{Case.ID}'	Yes
Property	PlanCompleted	Yes
MaxEntitiesToUpdate	1	Yes

[Save](#)

In the **Computations** field of the Activity0, insert `Activity0 + P7D`, which results in a value (Created date plus 2 days) that will be stored in the **PlanCompleted** property, when the **SetValue** activity is executed.

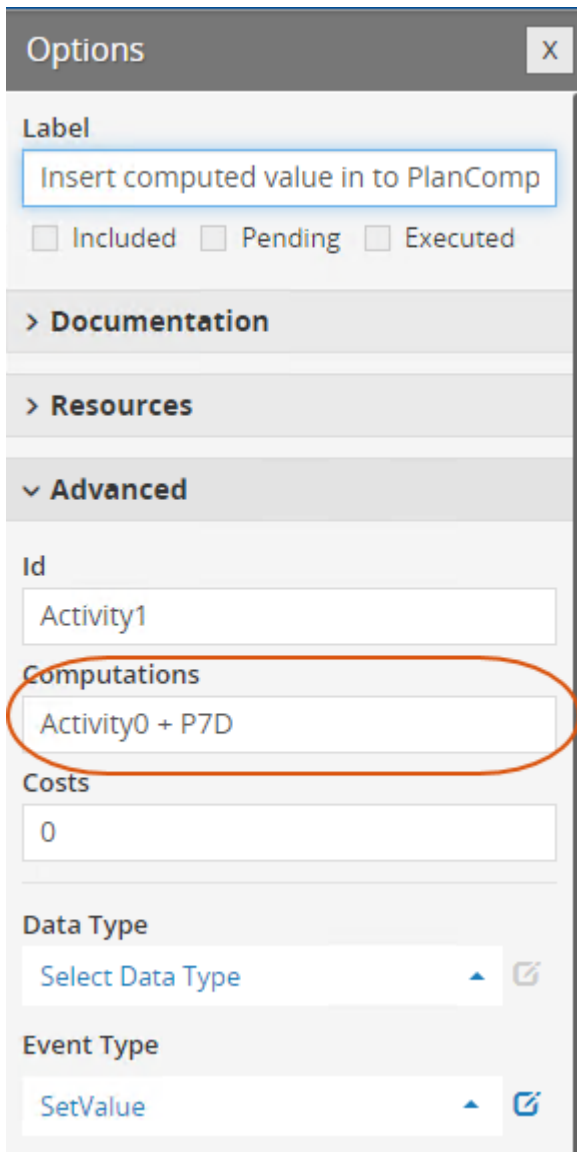

Execute activities automatically

To reduce the manual work that a user has to do in a case activity list, you can configure activities to be executed automatically. You can apply automatic execution in two ways by assigning either the **AUTO** role or the **L-AUTO** role to the activity, depending on when you want the activity to be executed. The activity will be executed by a system user.

AUTO

Activities with the **AUTO** role assigned will be executed automatically once as soon as the activity is included. This means:

- If an **AUTO** activity is successfully executed automatically, it will be set to manual for any additional executions.
- If an **AUTO** activity fails to be executed automatically, it will be set to manual for any additional executions.

If an activity fails to execute automatically, it will stay active and the user can execute it manually. If the activity is executed manually, the default values as set in the graph are shown in the form. The user can then change the values and execute the activity.

L-AUTO

Activities with the **L-AUTO** role assigned are executed soon as they are included and pending. Pending in this context means that the activity is required before the process can be considered completed. If the activities become pending again later in the process, they will be executed automatically again.

You can also assign the **L-AUTO** role to activities if you want to align the behavior of your WorkZone case activities with the simulation in DCR Graphs using the lazy user role. For more information, see the [DCR documentation](#).

The **L-AUTO** role itself does not execute an activity automatically. You need to design the graph so that the activity becomes included and pending (the **Pending** check box is selected on the activity or the activity has a **Response** connection—a blue arrow in the graph).

Notes:

- If you assign the **AUTO** or the **L-AUTO** role to the **CopyDocument** activity, you cannot use the value UP (Personal draft) for the **DocumentState** parameter. As it is a system user who executes activities automatically, only the system user will be able to see the document. See CopyDocuments.
- If you assign the **AUTO** role or the **L-AUTO** to an **UpdateEntities** activity or a **ValidateEntities** activity, you cannot use the @Me or @Unit notations. @Me and @Unit will fail because it is a system user that executes activities automatically. See Current user and organizational unit.
- Assigning the **AUTO** role or the **L-AUTO** to a **StartProcess** activity only works for processes without parameters. See the StartProcess activity type.
- In DCR terminology, "Pending" means that the activity must be executed before the whole process (the case activity list) can be considered complete.

Enable quick execution of activities

You can configure activities to be executed without opening dialog boxes. On all activity types, you can select an **EnableQuickExecution** option, which will display a check box next to the activity in WorkZone Client. When a user selects the check box, the activity is executed immediately without opening a dialog box.

Enable quick execution

1. In your DCR graph, select the activity you want to enable quick execution for.
2. In the **Options**, click **Resources**, and select the **EnableQuickExecution** check

box under **Groups**.

Options [X]

Label
Update case handler on case with quick

Included Pending Executed

> Documentation

v Resources

Roles +

AUTO

L-AUTO

Groups +

EnableQuickExecution

Phases +

> Advanced

> Customization


Quick execution in WorkZone Client

When users open an activity list in WorkZone Client, a check box appears next to activities that have the **EnableQuickExecution** option enabled. When a user selects the check box, the activity is executed immediately without opening a dialog box.

Example:


In this example, the activity list consists of a **Check** activity without quick execution enabled and an **UpdateEntities** activity with quick execution enabled.

The **UpdateEntities** activity named "Update case handler on case with quick execution" has the **EnableQuickExecution** option enabled and a check box is shown. When the user selects the check box, the activity is executed without opening a dialog box.

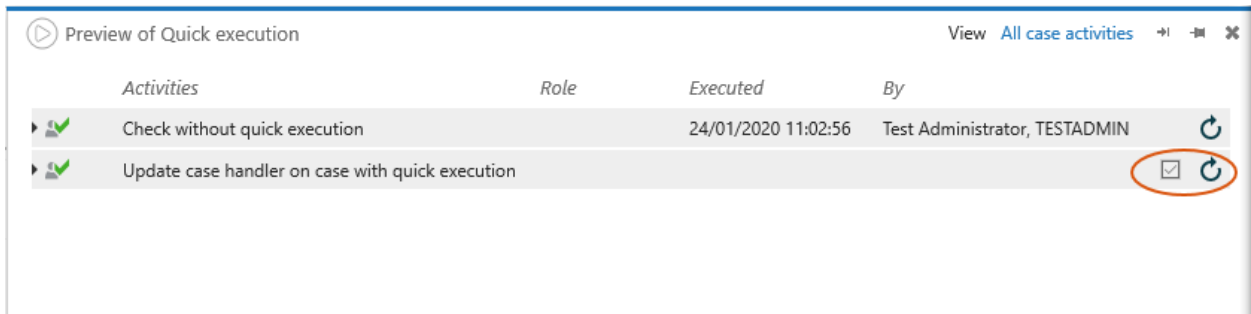

Apply deadlines and delays to activities

You can apply deadlines and delays to activities in a DCR graph using relations, which means that you can execute an activity automatically after a certain amount of time has passed (a delay) or when a certain point in time is reached (a deadline). Users will see the date that is calculated on the basis of the deadline in the **Due date** column in the activities preview pane in WorkZone Client.

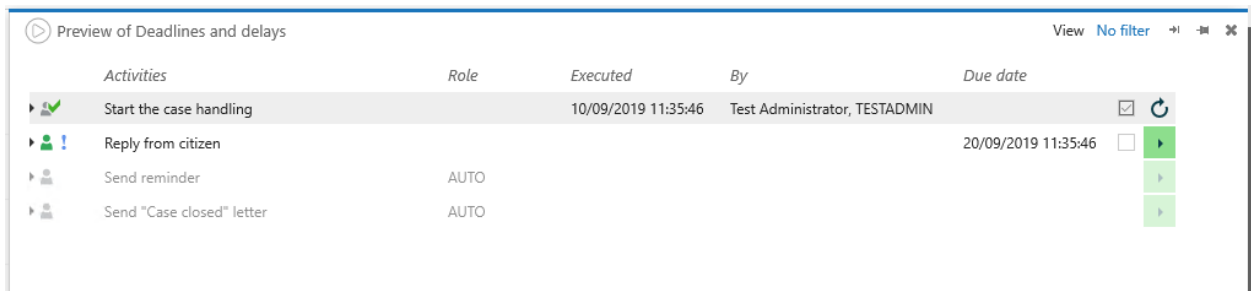

See [Deadlines](#) in the WorkZone Client User Guide.

Deadline

You can define a deadline for an activity to be executed. The deadline is relative and is calculated from the point in time that an activity is executed.

In the DCR graph, you can add deadlines to the **Response** relation type.

For more information about the **Response** relation type, see the [DCR documentation](#).

Delay

In addition to deadlines you can define a delay which will enable an activity with a delay or execute it with a delay if the activity is of the type AUTO. The delay is calculated from the time that an activity is executed.

In the DCR graph, you can add delays to the **Condition** relation type.

For more information about the **Condition** relation type, see the [DCR documentation](#).

Set a deadline or a delay on an activity

1. In your DCR graph, insert a relation of the type **Response** if you want to apply a deadline or **Condition** if you want to apply a delay.
2. In **Options**, enter a deadline in the **Deadline** field or a delay in the **Delay** field depending on the relation type and what you want the graph to do.

The notation for deadlines and delays is: days.hours:minutes:seconds

Example: 1.1:30:00 which indicates a deadline or a delay within one day, one hour, and 30 minutes from the activity was executed.


If you only specify, for example, 2 it means two whole days.

For more information about use of deadlines and delays in DCR graphs, see the [DCR documentation](#).

Example: DCR graph with deadlines and delays

A case handler sends a letter to a citizen with a reply deadline 10 days after the letter has been sent. If the citizen has not replied after 7 days, a reminder letter will be sent to the citizen's e-Boks automatically using SmartPost. When the reply from the citizen is received, a letter with information about the case being closed it is sent automatically to the citizen with a one minute delay using SmartPost.

The DCR graph may look like this:

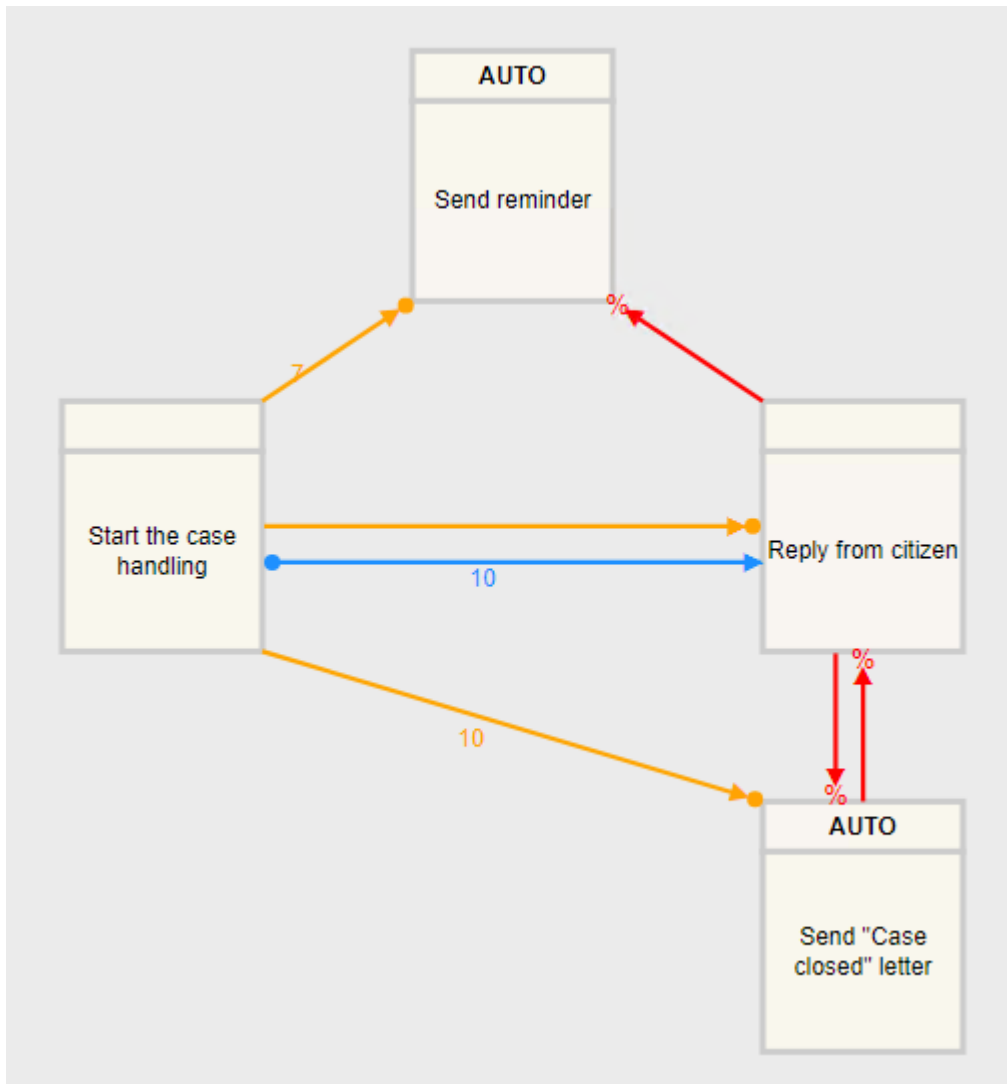

- A deadline of 10 days is specified on the **Response** relation type for the Reply from citizen activity.
- A delay of 7 days is specified on the **Condition** relation type, which ensures that the Send reminder activity is executed if a reply has not been received.
- A delay of 10 days is specified on the **Condition** relation type that sends the Send "Case closed" letter when the deadline has passed and no reply has been received.

Export and deploy case activity graphs

To prepare your graph for packaging and for import into your WorkZone system, you need to export the graph to an XML file, and then deploy it using WorkZone Configurator.

Export case activity graphs as XML

1. In DCR, select the graph that you want to export.
2. Click **File > Export As XML**. The graph is now exported to an XML-document with the same name as the graph.

To make the case activity workflow available to WorkZone Client users, you must deploy the DCR graph using WorkZone Configurator.

Deploy the case activity graph

In WorkZone Configurator, you must import the DCR graph XML-document that you just exported from DCR and deploy it.

To configure and deploy case activities, you must have the PROCESSADM access code.

1. Open WorkZone Configurator.
2. Click **Process** and follow the instructions in the [Case activities](#) topic in the WorkZone Configurator Administrator Guide.


FAQs about case activities

This section contains a list of frequently asked questions on WorkZone Process functionality. Click any question below to see the answer.

[How do you copy a query from WorkZone QueryBuilder](#)

Some activity types have parameters that require you to specify properties and values or filters in JSON format. You can use WorkZone QueryBuilder to create queries, and then copy them to the activity type parameters.

1. Create a query in WorkZone QueryBuilder.
2. Click the **Filter** element to copy the filter expression, and then click **OK** to copy the filter to the clipboard.

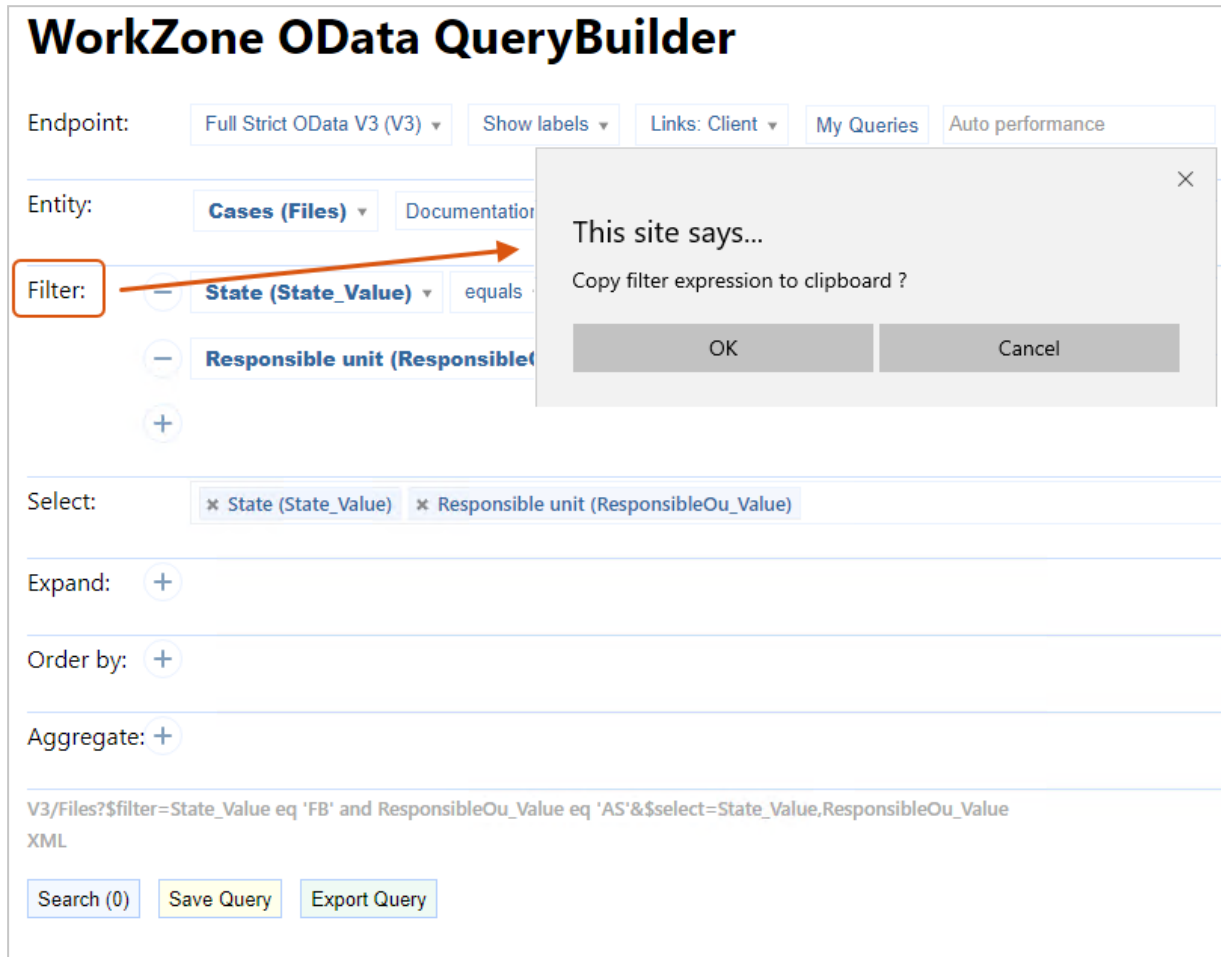


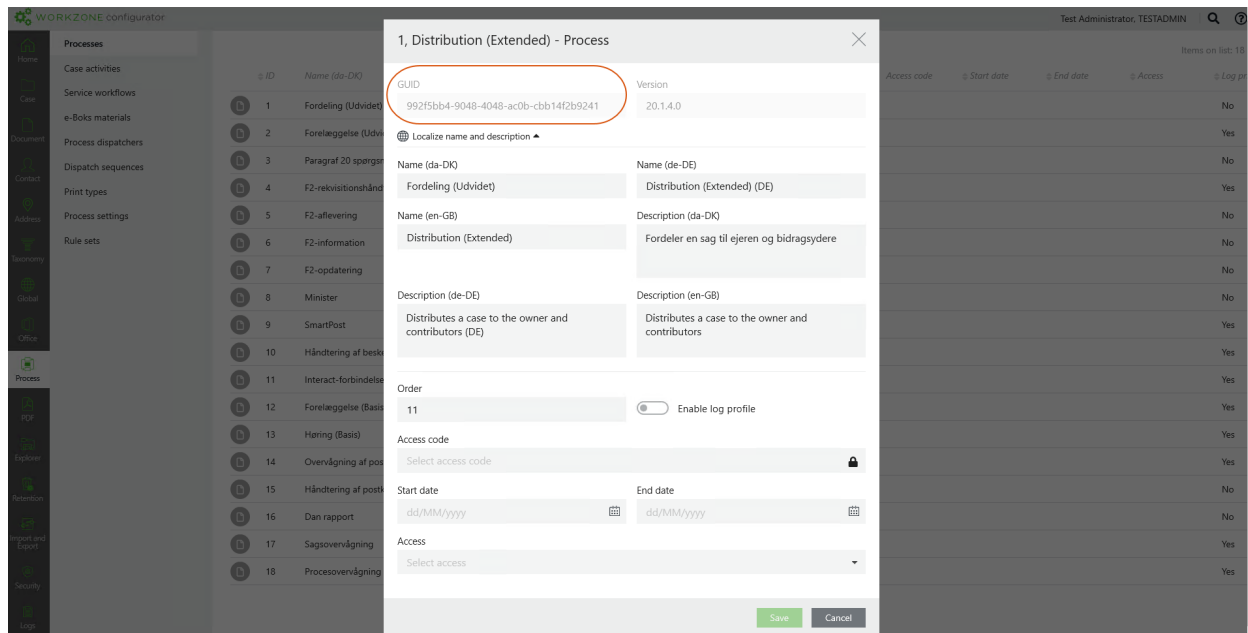
3. Paste the filter in to the **Properties** parameter of an activity. In this example, the filter expression `State_Value eq 'FB' and ResponsibleOu_Value eq 'AS'` is copied and pasted

See [Copy query elements from WorkZone QueryBuilder to the clipboard](#) for more information about copying elements in WorkZone QueryBuilder.

How do you look up process GUIDs

Some activity types require that you specify the GUID of a process in a **ProcessGuid** parameter. You can look up process GUIDs in WorkZone Configurator.

1. In WorkZone Configurator, go to **Process > Processes**.
2. Point to the process you want to get the GUID for.
3. Click  **Edit process parameters**.
4. Copy the GUID from the **GUID** field and paste it into the GUID parameter of the activity.




You can also look up GUIDs in the WZP_PROCESS table using ScanSQL.

How do you look up case activities GUIDs

Some activity types require that you specify the GUID of a process in a **ProcessGuid** parameter. You can look up process GUIDs in WorkZone Configurator.

1. In WorkZone Configurator, go to **Process > Case activities**
2. Point to the case activity you want to get the GUID for.
3. Scroll to the **GUID** column.
4. Copy the GUID from the **GUID** field and paste it into the GUID parameter of the

activity.

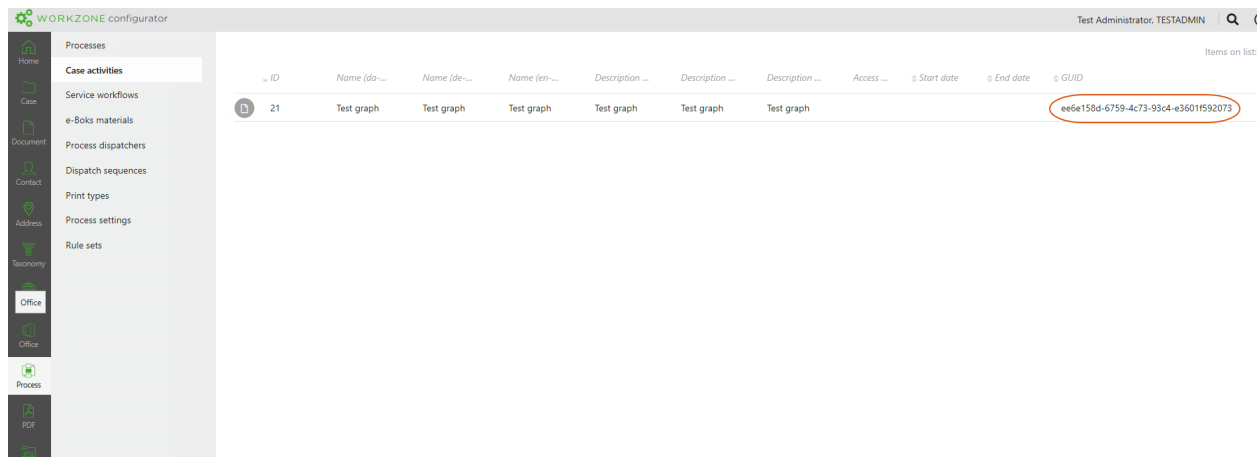

You can also look up GUIDs in the WZP_PROCESS table using ScanSQL.

Troubleshooting case activities

Click an issue below to see the solution or workaround.

Send SmartPost error messages

When users execute an activity list in WorkZone Client and an activity fails, an error message is shown under **History** in the **Case activities** pane. The activity may fail due to wrong configuration of the Send SmartPost activity in the graph. Below you will find a list of error messages with extended descriptions.

["The activity cannot find the specific letter document to send."](#)

Message in Danish: "Aktiviteten kan ikke finde det specifikke brevdokument, der skal sendes."

The message is shown if the letter document specified in the **Letter** parameter does not return a specific document that can be used as the letter document. The query must only return one specific document. For example, if more than one Word document is saved on the case, the query must define exactly which document must be used as the letter. The activity may also fail if the specific document does not exist on the case.

["The activity cannot find valid recipient addresses."](#)

Message in Danish: "Aktiviteten kan ikke finde gyldige modtageradresser."

The message is shown if the **Recipient** parameter in the query or the role notation do not return any recipients, for example if the activity contains a wrong query or it lists wrong or non-existing roles.

"The total number of messages to send exceeds the allowed maximum number. The maximum number is 50 messages."

Message in Danish: "Det samlede antal beskeder, der skal sendes, overstiger det tilladte maksimale antal. Du kan højst sende 50 beskeder."

The message is shown if the number of messages to send exceeds the allowed maximum number, which is currently set to 50 messages. The number of messages is calculated based on both messages to recipients and copy recipients. You can as the graph designer modify the **Recipient** parameter to retrieve less recipients, or the user can reduce the number of case parties with the specified roles on the case.

"The activity cannot start the SmartPost process. The SmartPost process is not valid."

Message in Danish: "Aktiviteten kan ikke starte SmartPost-processen. SmartPost-processen er ikke gyldig."

The message is shown if the activity contains an invalid SmartPost process GUID in the **ProcessGuid** parameter.

"The activity cannot start the SmartPost process. The value {ProcessOwner} is not valid for the 'ProcessOwner' parameter."

Message in Danish: "Aktiviteten kan ikke starte SmartPost-processen. Værdien {ProcessOwner} er ikke gyldig for parametret 'ProcessOwner'."

The message is shown if the process owner cannot be found because the contact does not exist or has reached the end date or there is no case handler on the case or the document.

Troubleshooting


Click an issue below to see the solution or workaround.

[Problems related to Proxy users in Microsoft Outlook](#)

When a proxy user performs an action in a smarttask, the state of the user task is not updated according to the action.

The issue is caused by incorrect write permissions for the user account in Microsoft Outlook. To work around this issue:

1. Right-click the top-level node in the navigation pane (normal view):

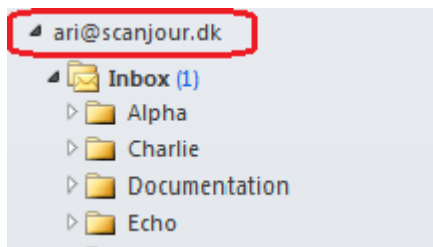

2. Select **Folder Permissions**. The **Outlook Today - [user account] Properties** dialog box is displayed.
3. Click the **Permissions** tab.
4. For each listed user, select **Edit all** if not already selected.
5. Click **OK**.

Important: You need to perform the same steps for all shared folders under the user account. To enter settings for shared folders, right-click a shared folder and select **Properties**.

[Service is stopped when a process is started](#)

To work around this issue:

Ensure that **WorkZone Process Services** (`Scanjour Service COM WZP` and `ScanJour workZone Process Asset Update Service`) are running when WorkZone Process is being used.

[404 error when running in a load balanced environment](#)

A 404 error may occur when you run the `Scanjour.Workflow4.UpdateAssets` service.


To work around this issue:

1. Select **Run as a different user** in Internet Explorer and, for the user who uses the service, add the website as a trusted site on the local intranet.
2. Select **Automatic logon with current user name and password** under **User Authentication**.
3. Locally on the server, select the following security settings for the local intranet zone:
 - MIME Sniffing: **Enable**
 - Include local directory path when uploading files to a server: **Enable**
 - Launching applications and unsafe files: **Enable**
4. In **Local Area Network (LAN) Settings**, leave **Automatically detect settings** unselected.

An error icon is displayed in the Processes overview

Sometimes an error icon can be displayed in the Processes overview.

To work around this issue:

1. See the tooltip of the error icon .
2. Take the necessary action - for example, give the actor read access to the document or ensure that the actor's e-mail address exists in WorkZone Client.

Smarttask appear as not loaded

The content of smarttask may appear as not loaded or loaded with no other content than a grey background.

This may be happen if the Exchange Server is using an SSL certificate that does not work (for example, it has become inactive).

In order to debug this issue:

1. In Outlook, click **File > Options**.
2. On the left pane, select **Advanced**.

3. In the **Developers** section in the contents on the right, select the **Show add-in user interface errors** check box.
4. Click **OK**.
5. Restart Outlook.
6. Open a smarttask.

If you get an error message saying that an exception has occurred and it contains the word “Autodiscover”, then it is a known issue with an SSL certificate that does not work.

To work around this issue:

1. Open the **IIS Manager** on the Exchange server.
2. Navigate to Default Web Site.
3. On the action pane to the right (under **Edit Site**), click **Bindings**.
4. Edit all the bindings of the type `https`.
5. From the **SSL certificate** list, select a valid SSL certificate.
6. Recycle all the `MSEExchange (x)` application pools.
7. Click **OK**.

Task locked by other user

When a user has opened a task, it is locked, and other users cannot work on it.

Workaround:

To unlock a task, you need `PROCESSADM` access rights.

Searching by document ID does not produce a search result

To search for documents from WorkZone Process, you must know part of the title of the document. If you want to search for a document based on the document ID, you should process the search from WorkZone Content Server. In WorkZone Content Server 2016, the search option is already available.

To enable the search feature in WorkZone Content Server 2014, run the script `i_ctx_record_title.sql` which is located in **Program Files (x86)** under `\KMD\Workzone\Process\Config\scripts` in sqlplus:

```
sql> @i_ctx_record_title.sql
sql> execute create_i_ctx_record_title;
```



```
sql>
```

A mail agent user does not receive smart tasks in Outlook as expected

Setting up a mail agent user who is not the user running the WorkZone Process Mail Agent, when you configure WorkZone Process in environments, where you cannot make changes to the Active Directory, requires a workaround. Failing to complete this workaround will have the effect that users will not receive smart tasks in Outlook as expected. The server event log will report that users running the WorkZone Process Mail Agent do not have permission to send mails on behalf of the mail agent user.

To work around this issue, complete this step:

- Open Outlook as the mail agent user and to add the WorkZone Process user as a delegate or representative, click **File -> Account Settings -> Delegate Settings -> Add > [user running WorkZone Process Mail Agent]**

Changes to mail notification settings don't seem to be applied

When you enable email notifications for one or more users you must update the email notification settings to make the changes apply. We recommend that you update the settings by recycling the WzpSvc application pool from the Internet Information Services (ISS).

Mail notifications are also updated if you restart the ISS. However, restarting the IIS will affect applications and services apart from the email notifications so recycling the WzpSvc application pool is the preferred method.

For more information about the mail notification configuration, see [Configure notifications](#).

Smart task and Start process do not load correctly

When trying to open a smart task or start a process from the Process view, the task or process might fail to load correctly. You will get the message that a value is missing to complete the action.

To work around this issue, complete these steps:

- Close Outlook
- Clear the cache in Internet Explorer
- Reopen Outlook

Configurator fails to load data into database

When working with the configurator, you might experience that it fails with the following message:

Error 6 initializing SQL*Plus

SP2-0667: Message file sp1<lang>.msb not found

SP2-0750: You may need to set ORACLE_HOME to your Oracle software directory.

To work around this issue, either restart the server machine or log off and then log on to the machine again.

"Concurrent connections exceeded" when using the Mailbox Monitor and F2 integration service workflows

You may experience errors if you use the Mailbox Monitor and F2 integration service workflows. Error text in the event log:

```
Unable to initialize ExchangeConnection on "host address": Microsoft.Exchange.WebServices.Data.ServiceResponseException: You have exceeded the available concurrent connections for your account. Try again once your other requests have completed.
```

```
Error is caused by a high number of concurrent exchange connection on single email account.
```

To solve this issue, you can configure multiple Mailbox Monitor/F2 integration services to run on different user accounts. You can also modify the Exchange throttling policy based on Microsoft guidelines. See [Modify the EWS throttling policy to handle concurrent connections](#).

Terms and conditions

Intellectual Property Rights

This document is the property of KMD. The data contained herein, in whole or in part, may not be duplicated, used or disclosed outside the recipient for any purpose other than to conduct business and technical evaluation provided that this is approved by KMD according to the agreement between KMD and the recipient. This restriction does not limit the recipient's right to use information contained in the data if it is obtained from another source without restriction set out in the agreement between KMD and the recipient or by law.

Disclaimer

This document is intended for informational purposes only. Any information herein is believed to be reliable. However, KMD assumes no responsibility for the accuracy of the information. KMD reserves the right to change the document and the products described without notice. KMD and the authors disclaim any and all liabilities.

Copyright © KMD A/S 2021. All rights reserved.